

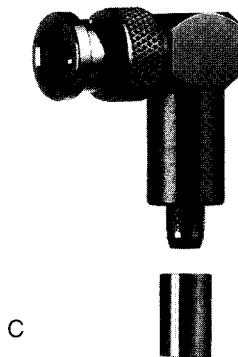





4. BNC-Kabelwinkelstecker Crimp
 BNC-Angle-Plug Crimp

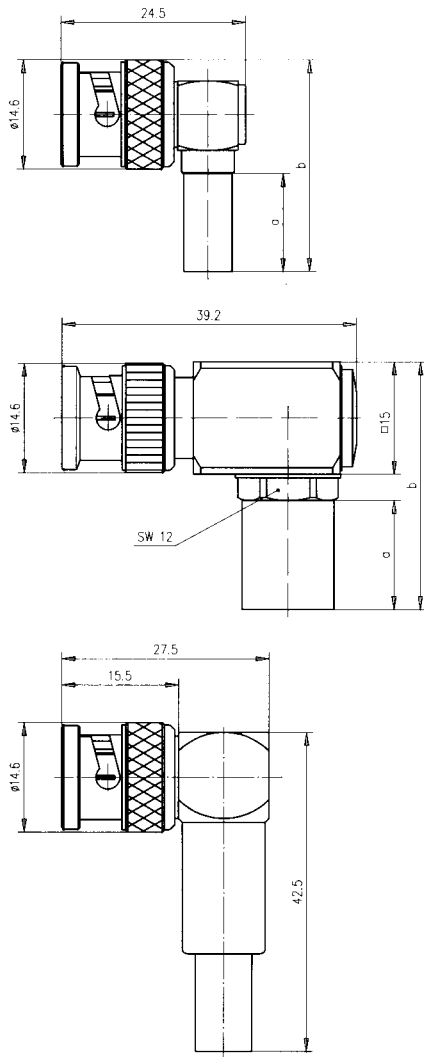

Bestell-Nr. Order Nr.	Z Z	Kabel-Type Cable type	Montage Assembly	Anmerkungen Remarks
J01000A0010	50	RG 174/U; RG 188 A/U; RG 316/U	A0503	A a = 9.5 b = 24.7
J01000A1257	50	RG 58 C/U; Belden 9907	A0505	A a = 13 b = 28.2
J01000A1258	50	RG 223/U	A0505	A a = 13.5 b = 28.7
J01000A0030	50	RG 213/U; AA 5886	D0512	B a = 14.5 b = 33
J01000A0031	50	RG 214/U; RG 393/U	D0512	B a = 13 b = 31.5
J01000A0024	50	RG 58 C/U; Belden 9907	A0605	C crimp/crimp
J01002A0027	75	RG 179 B/U; RG 187 A/U	A0503	A a = 9.5 b = 24.7
J01002A0029	75	Amphenol HF 2172; 0.4/2.5	A0504	A a = 13 b = 28.2
J01002A1356	75	RG 59 B/U; 0.6/3.7	A0506	A a = 13 b = 28.2
J01002B1356	75	RG 59 B/U; 0.6/3.7	A0506	A a = 13 b = 28.2 mit Schraubkappe/with screw cap
J01002A1266	75	RG 62 A/U	A0706	C crimp/crimp
J01002A1354	75	0.6/3.7D	A0606	C " "
J01002A1377	75	RG 59 B/U; 0.6/3.7	A0606	C " "