



双刀波动开关
双刀带灯波动开关

Double-poles Rocker Switch
Double-poles Illuminated Rocker Switch

RS-2 Series
IRS-2 Series



型号说明 Ordering Information

IRS-201-1A3D-R/B

- 基座颜色 Base color
- 盖帽颜色 Cap color
- 直流灯 DC lamp
- 盖帽标记 Cap marking
- 盖帽种类 Cap options
- 产品序号 Product order
- 电路特性 Circuitry trait
- 刀数 Poles
- IRS带灯波动开关 Illuminated Rocker Switch
- RS不带灯波动开关 Rocker Switch

技术特性 Specification

- 1.规格 Rating:20A 125VAC;15A 250VAC;35A 12VDC
- 2.接触电阻 Contact Resistance:35mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1500VAC, 1Minute
- 5.操作温度 Operating Temperature:-25℃ ~ +85℃
- 6.电气寿命 Electrical Life:10,000 Cycles

电路特性Circuitry trait


01	ON	—	OFF
02	ON	—	ON
11	(ON)	—	OFF
03	ON	OFF	ON

():回弹指示 Indicates Momentary


盖帽颜色Cap color 基座颜色Base color 防水罩 Water proof cap

- 黑 Black (B)
白 White (W)
红 Red (R)
黄 Yellow (Y)
绿 Green (G)
蓝 Blue (BL)
桔黄 Orange (O)
灰 Gray (GR)


- 黑 Black (B)
白 White (W)
灰 Gray (GR)

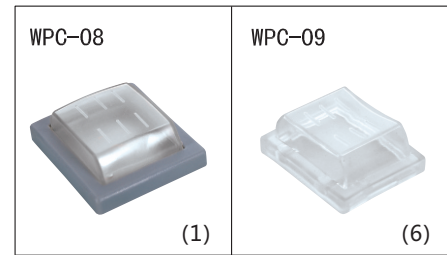


盖帽种类 Cap options

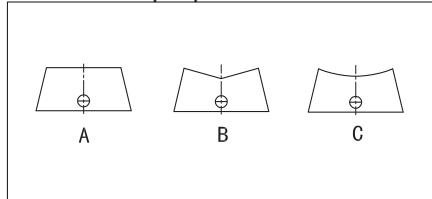


盖帽标记 Cap marking

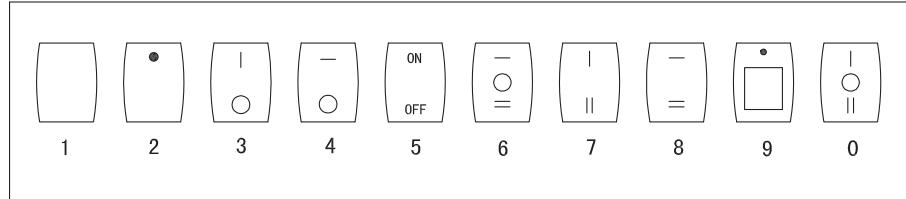


IRS-201-1A ON-OFF
RS-201-1A ON-OFF
DPST 4P

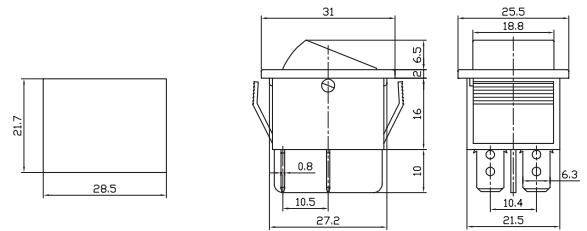

IRS-201-1B ON-OFF
RS-201-1B ON-OFF
DPST 4P

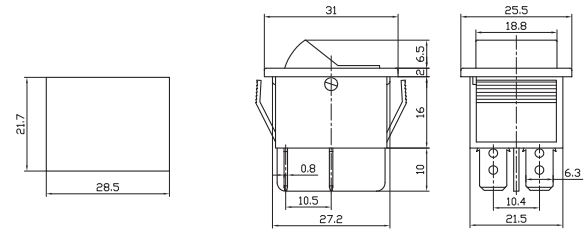

IRS-201-1C ON-OFF
RS-201-1C ON-OFF
DPST 4P

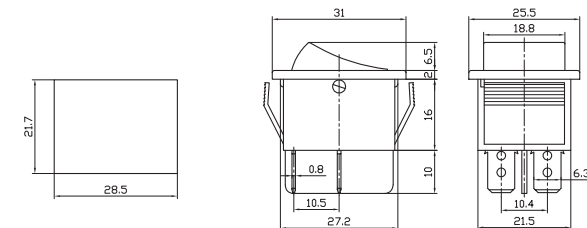
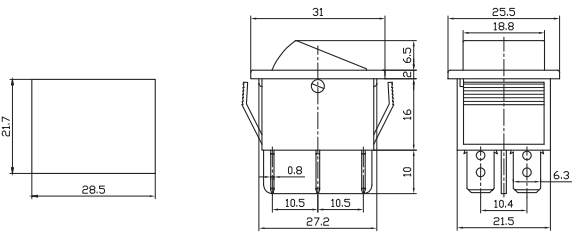

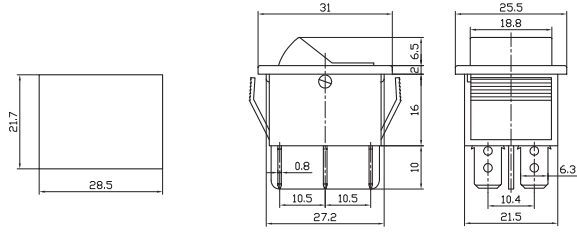

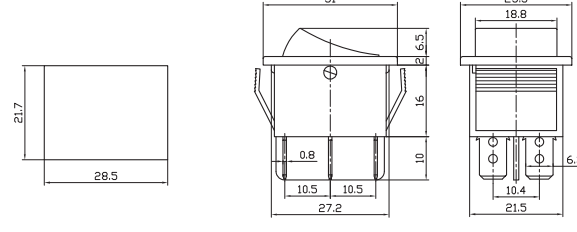

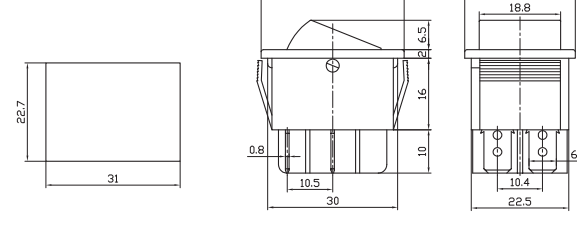

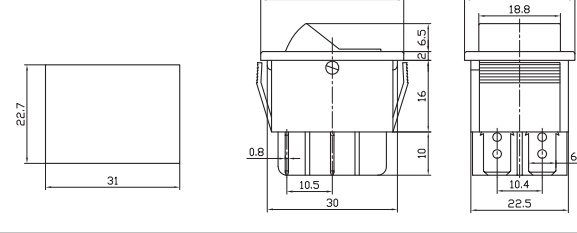

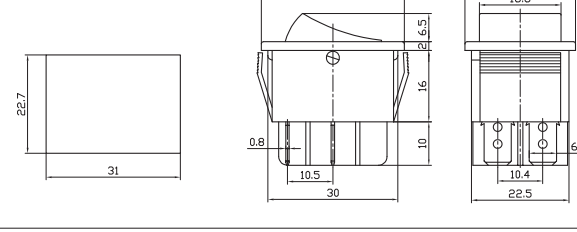

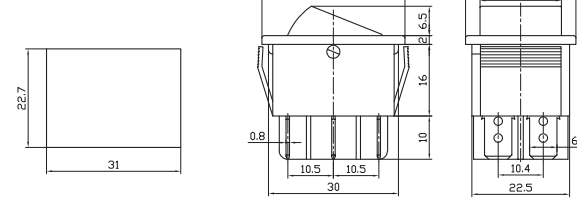




双刀波动开关
双刀带灯波动开关

Double-poles Rocker Switch
Double-poles Illuminated Rocker Switch

RS-2 Series
IRS-2 Series

	<p>IRS-202-1A ON-ON IRS-203-1A ON-OFF-ON RS-202-1A ON-ON RS-203-1A ON-OFF-ON DPDT 6P</p>	
	<p>IRS-202-1B ON-ON IRS-203-1B ON-OFF-ON RS-202-1B ON-ON RS-203-1B ON-OFF-ON DPDT 6P</p>	
	<p>IRS-202-1C ON-ON IRS-203-1C ON-OFF-ON RS-202-1C ON-ON RS-203-1C ON-OFF-ON DPDT 6P</p>	
	<p>IRS-201-2A ON-OFF RS-201-2A ON-OFF DPST 4P</p>	
	<p>IRS-201-2B ON-OFF RS-201-2B ON-OFF DPST 4P</p>	
	<p>IRS-201-2C ON-OFF RS-201-2C ON-OFF DPST 4P</p>	
	<p>IRS-202-2A ON-ON RS-202-2A ON-ON DPDT 6P</p>	





双刀波动开关
双刀带灯波动开关

Double-poles Rocker Switch
Double-poles Illuminated Rocker Switch



RS-2 Series
IRS-2 Series





IRS-202-2B ON-ON
RS-202-2B ON-ON
DPDT 6P

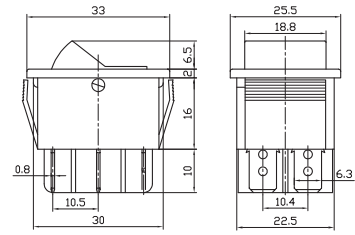


IRS-202-2C ON-ON
RS-202-2C ON-ON
DPDT 6P

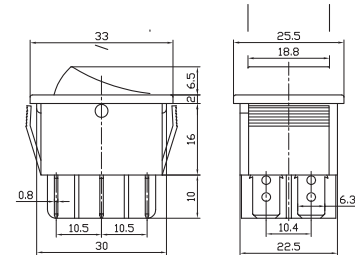



IRS-201-3A ON-OFF
RS-201-3A ON-OFF
DPST 4P

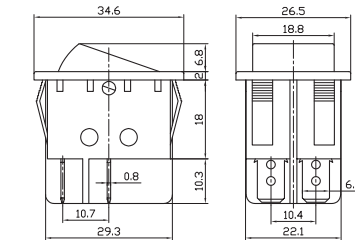



IRS-201-3C ON-OFF
RS-201-3C ON-OFF
RS-211-3C (ON)-OFF
DPST 4P

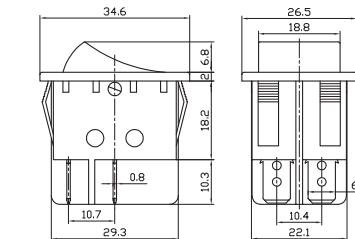

IRS-202-3A ON-ON
RS-202-3A ON-ON
DPDT 6P

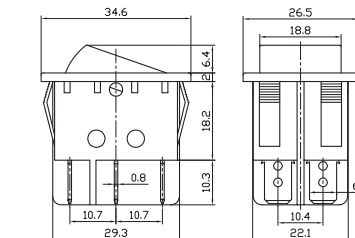

IRS-202-3C ON-ON
RS-202-3C ON-ON
DPDT 6P

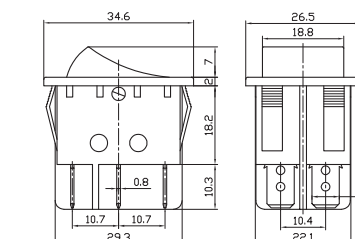



双刀波动开关
双刀带灯波动开关



Double-poles Rocker Switch

Double-poles Illuminated Rocker Switch



RS-2 Series
IRS-2 Series





RS-201-4C ON-OFF
DPST 4P

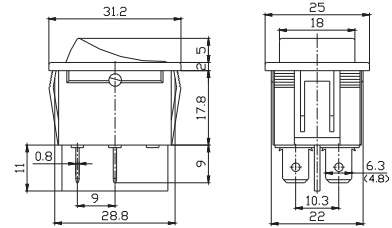



RS-202-4C ON-ON
RS-203-4C ON-OFF-ON
RS-223-4C (ON)-OFF-(ON)
DPDT 6P

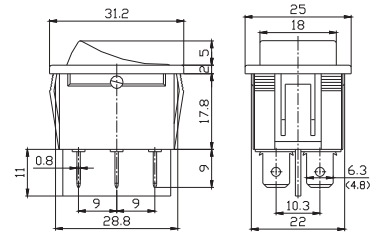



RS-203-5C ON-OFF-ON
DPDT 6P
RS-2032-5C ON-ON-ON
DP3T 5P
6A 125VAC;3A 250VAC





IRS-201-6C ON-OFF
RS-201-6C ON-OFF
20A 125VAC;16A 250VAC
DPST 4P



IRS-202-6C ON-ON
RS-202-6C ON-ON
20A 125VAC;16A 250VAC
DPDT 6P



IRS-201-7A ON-OFF
DPST 4P





双刀波动开关

Double-poles Rocker Switch

RS-2 Series

双刀带灯波动开关

Double-poles Illuminated Rocker Switch

IRS-2 Series





IRS-2101-1A ON-OFF

DPST 6P

RS-2102-1A ON-ON

DPDT 6P

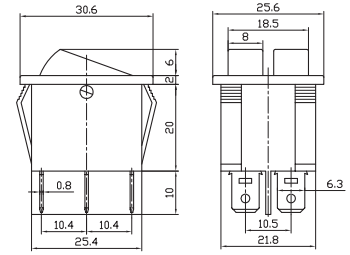


IRS-2101-1B ON-OFF

DPST 6P

RS-2102-1B ON-ON

DPDT 6P




IRS-2101-1C ON-OFF

DPST 6P


RS-2102-1C ON-ON

DPDT 6P

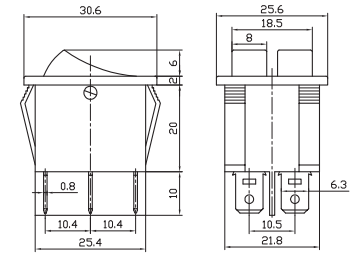



IRS-2101E-1C ON-OFF

DPST 6P

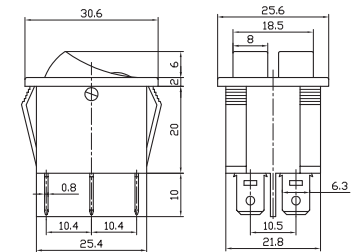

RS-2101-3C ON-OFF

DPST 4P



IRS-2101-3C ON-OFF

DPST 6P

