



Item no.: 256-402
 Product description: PCB TERMINAL STRIP 2 SOLDER PINS / POLE 2 POLE PIN
 SPACING 5/5.08 MM / 0.2 IN

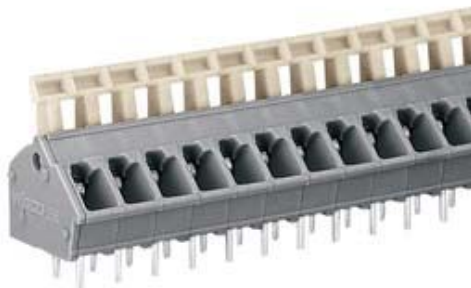

Produkt kann von Bild abweichen / product may differ

Packing unit 400 4*100 pieces

| | |
|--------------------------|---------------------|
| Product group | 4 (Printed Circuit) |
| Weight | 2.03 g |
| Color | gray |
| No. of connection Points | 2 |
| No. of potentials | 2 |
| pole count | 2 |
| Height | 18.2 mm |
| Height | 0.72 in |
| Width | 12.9 mm |
| Width | 0.508 in |
| Depth | 17.6 mm |
| Depth | 0.693 in |
| Pin spacing from | 5 mm |
| Pin spacing up to | 5.08 mm |
| Pin spacing from | 0.197 in |
| Pin spacing up to | 0.2 in |
| Pollution degree | 2 |
| Measured voltage EN | 320 V |
| Measured shock voltage | 4 kV |
| Current intensity EN | 24 A |

Pollution degree
Measured voltage EN

2
630 V



| | |
|----------------------------------|------------------------------|
| Measured shock voltage | 4 kV |
| Current intensity EN | 24 A |
| Connection method | CAGE CLAMP® CONNECTION |
| Cross section [mm ²] | 0.08 - 2.5 mm ² |
| Wiring method | solid |
| Cross section [mm ²] | 0.08 - 2.5 mm ² |
| Cross section [mm ²] | 0.25 - 1.5 mm ² |
| Cross section [mm ²] | 0.25 - 1.5 mm ² |
| Cross section [AWG] | 28 - 12 AWG |
| Strip length from | 5 mm |
| Strip length to | 6 mm |
| Material group | I |
| xxx-xxx/000-005 | red |
| xxx-xxx/000-006 | blue |
| xxx-xxx/000-008 | dark gray |
| xxx-xxx/000-009 | light gray |
| xxx-xxx/000-012 | orange |
| xxx-xxx/000-017 | light green |
| xxx-xxx/332-000 | with 5,5 mm long solder pins |
| xxx-xxx/332-xxx | with 5,5 mm long solder pins |



| Item no. | Admission office | Approval no. | Voltage [V] | Current [A] | Cross section [mm ²] |
|----------|------------------|-------------------|-------------|-------------|-----------------------------------|
| 256-402 | ABS | 04-HG469925/1-PDA | 500/250 | 16 | 0,5-2,5 |
| 256-402 | BV | 11915/A0 | 500/250 | 16 | 0,08-2,5 |
| 256-402 | CCA | NL6249 | 250 | 24 | 0,08-2,5 |
| 256-402 | CSA | 18677-45 | 300/600 | 15/5 | 28-12 |
| 256-402 | DNV | E-9215 | 500/250 | 16 | 0,08-2,5 |
| 256-402 | GL | 17296-00HH | 500/250 | 16 | 0,5-2,5 |
| 256-402 | KEMA | 2110204.03 | 250 | 16 | 0,5-2,5 |
| 256-402 | RMR | 11130002 | 250 | 16 | 0,5-2,5 |
| 256-402 | UR | E45172 | 300/300 | 15/10 | 28-12 |

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected