
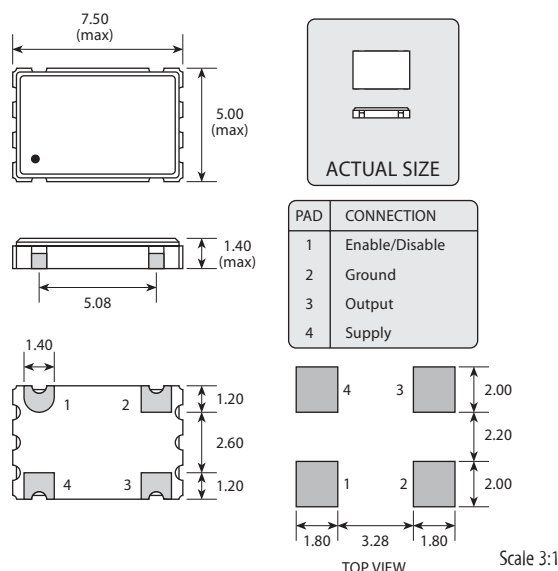


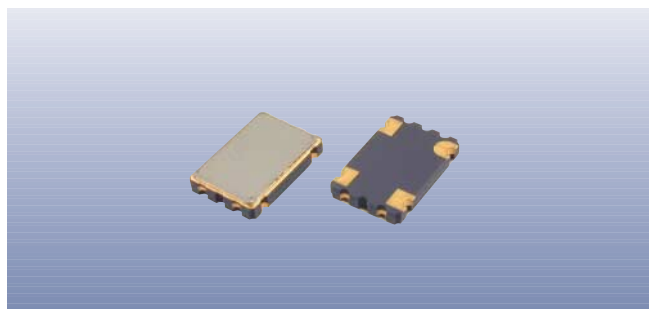

Features

- ➡ **Ceramic package with metal lid**
- ➡ **High drive capability - up to 50pF**
- ➡ **Enable / disable tristate function**
- ➡ **Power saving function (P & L variants)**

Standard Frequencies

Frequencies in MHz			
1.84320	16.00000	30.00000	50.00000
2.00000	18.43200	32.00000	64.00000
3.68640	20.00000	33.86880	66.66600
4.00000	24.00000	36.86400	70.00000
5.00000	24.57600	40.00000	80.00000
8.00000	25.00000	44.23680	100.00000 *
10.00000	27.00000	44.73600	106.25000 *
12.00000	29.48920	48.00000	125.00000 *
14.31818	29.49120	49.15200	155.52000 *

* P and L variants only. Other frequencies available. Please consult our sales office.

Enable / Disable Function

Input (pad 1)	Output (pad 3)
Open	Enabled
'1' level	Enabled
'0' level	High Impedance

Specifications

GXO-U108P: 5.0V supply, E/D with power saving

GXO-U108H: 5.0V supply, E/D high drive

GXO-U108L: 3.3V supply, E/D with power saving

Parameters	Variant			Option Codes
	P	H	L	
Frequency range: 1.8 ~ 80.0MHz 1.8 ~ 170MHz	■	■	■	
Frequency stability*: ±100ppm ±50ppm ±25ppm ±20ppm	■ □ □ □	■ □ □ □	■ □ □ □	B A D
Operating temperature range: -10 to +70°C -40 to +85°C	■ □	■ □	■ □	I
Storage temperature range: -55 to +125°C	■	■	■	
Supply voltage (V_{DD}): +5.0V (±0.5V) +3.3V (±0.3V)	■	■	■	
Supply current (mA max): 1.8 ~ 32.0MHz >32.0 ~ 50.0MHz >50.0 ~ 67.0MHz >67.0 ~ 80.0MHz >80.0 ~ 125MHz >125 ~ 170MHz	40 50 50 80 80 90	27 45 60 75	15 20 25 40 40 50	
Logic levels: '0' level = 10%V _{DD} max '1' level = 90%V _{DD} min	■ ■	■ ■	■ ■	
Start up time: 5ms max (<32MHz) 10ms max (>32MHz)	■ ■	■ ■	■ ■	
Waveform symmetry: 45:55 max 45:55 max (1.8 ~ 50.0MHz) 40:60 max (>50.0MHz) 40:60 max	■ ■ ■ ■	■ ■ ■ ■	■ ■ ■ ■	
Driving ability: 10 LSTTL 15pF HCMOS 10 TTL 50pF HCMOS	■ ■ ■ ■	■ ■ ■ ■	■ ■ ■ ■	
Rise / fall time: 7ns max (<80MHz) 4ns max (80.0 ~ 125MHz) 3ns max (125 ~ 170MHz)	■ ■ ■	■ ■ ■	■ ■ ■	
Enable / disable function: Tristate (control via pad 1) 100ns / 100ns 10ms / 100ns	■ ■ ■	■ ■ ■	■ ■ ■	
Stand-by current: 10µA	■	■	■	

■ Standard. □ Optional - Please specify required code(s) when ordering

* Frequency stability is inclusive of calibration @ 25°C, operating temperature range, supply voltage change, load change, ageing, shock and vibration.

Ordering Information

Product name + variant + option codes (if any) + frequency
eg: **GXO-U108H/B 40.0MHz** 5V, ±50ppm, -10 to +70°C

♦ Available on T&R - 2k pcs per reel. See our website for details