
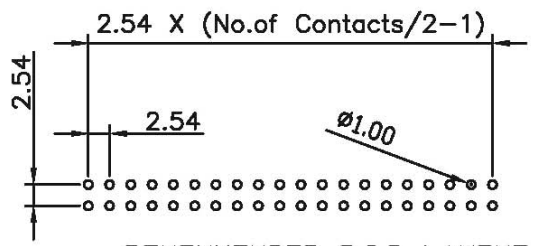


Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature: - 40° ~ +105° C  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT  
 Underplate: Nickel  
 Contact Area: 1u"~30u" Selective Gold  
 Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or  
 100u" Tin/Lead Free(Brighten Tin/Matte Tin)

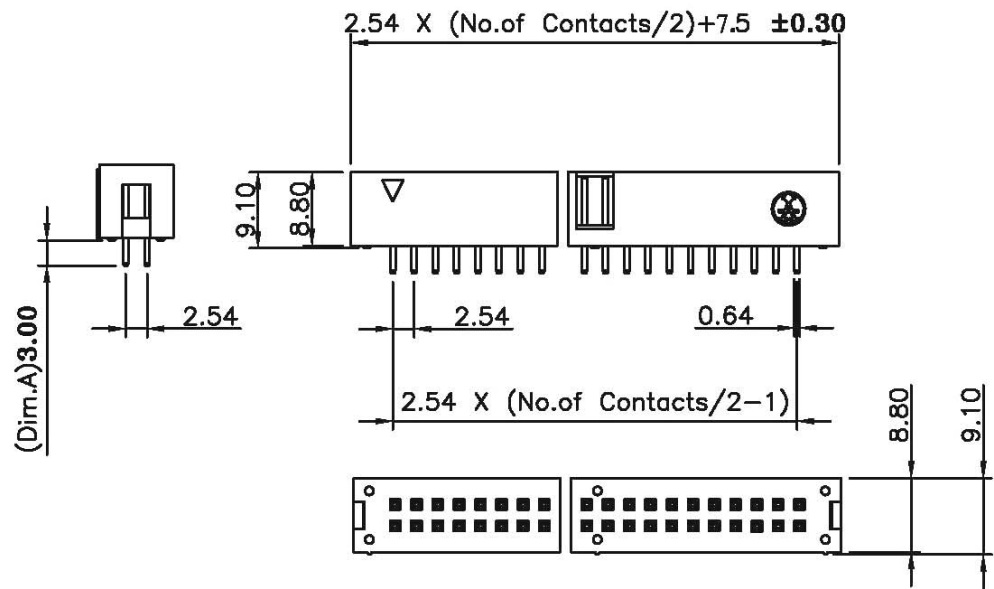

RENOMMENDED P.C.B LAYOUT  
 TOLERANCES: ±0.05mm

AWHWxxG-0102-T-R  
 30u" of Gold  
 AWHWxxG-0202-T-R  
 Flash Gold

UNLESS OTHERWISE SPECIFIED TOLERANCE		±0.2		
SCALE: AS SHOWN	UNIT: mm			
DRAWN	JOE	12/19/05	DRAWN NAME: BOX HEADER (PITHC: 2.54mm) 1/2	
CHECKED		/ /	PRODUCT NO. AWHWxxG-0x02-T-R	
APPROVED		/ /	FILE NAME:	
REV. A			SIZE A4	

REV.	A	ECN-0512106(Emily)	DESCRIPTION	DATE	12/13/05
------	---	--------------------	-------------	------	----------