


# SMT & THROUGH-HOLE BOARD STACKERS

(2.00 mm) .0787" PITCH • TW SERIES

CLT or MMS	SQT
8	4
G b p s	G b p s

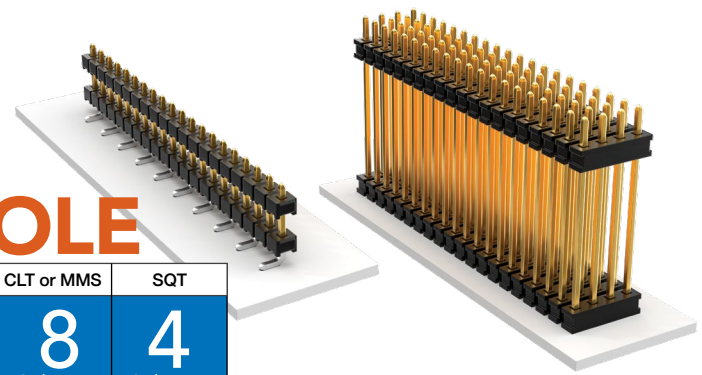

**TW**  
**Board Mates:**  
 CLT, SQT, SQW, ESQT,  
 TLE, SMM, MMS

**Cable Mates:**  
 TCS D

## SPECIFICATIONS

**Insulator Material:**  
 Black Liquid Crystal Polymer  
**Terminal Material:**  
 Phosphor Bronze  
**Plating:**  
 Sn or Au over  
 50 μ" (1.27 μm) Ni  
**Current Rating:**  
 TW-SM = 4.9 A per pin  
 (2 pins powered)  
 TW-TH = 5.2 A per pin  
 (2 pins powered)  
**Operating Temp Range:**  
 -55 °C to +105 °C with Tin;  
 -55 °C to +125 °C with Gold

## PROCESSING

**Lead-Free Solderable:**  
 Yes  
**SMT Lead Coplanarity:**  
 (0.15 mm) .006" max\*  
 \*(.004" stencil solution  
 may be available; contact  
 IPG@samtec.com)

## ALSO AVAILABLE

MOQ Required

Other Platings  
 End shrouds with or  
 without guide post

**Notes:**  
 For added mechanical  
 stability, Samtec  
 recommends  
 mechanical board  
 spacers be  
 used in applications  
 with gold or  
 selective gold  
 plated connectors.  
 Contact ipg@samtec.com  
 for more information.

This Series is non-standard,  
 non-returnable.

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	SM	OTHER OPTION																						
	02 thru 36	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail  -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail  -T = Matte Tin	-S = Single Row  -D = Double Row	- "XXX" = Stacker Height in inches (0.13 mm) .005" increments  Example: -250 = (6.35 mm) .250"		- "XXX" = Polarized Position  -A = Alignment Pin (Metal or plastic at Samtec discretion) (4.83 mm) .190" min. board space (-D only)  -P = Pick & Place Pad (1.91 mm) .075" min. post height (04-36 only)  - "X"R = Specify "T" for Tape & Reel Specify "F" for Full Reel Tape & Reel (must order max. quantity per reel; contact Samtec for quantity breaks) (-07 lead style N/A) (-06 lead style with -P option N/A as standard)																						
				<table border="1"> <thead> <tr> <th>ROW OPTION</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>-S</td> <td>(5.08) .200</td> </tr> <tr> <td>-D</td> <td>(6.35) .250</td> </tr> </tbody> </table>		ROW OPTION	A	-S	(5.08) .200	-D	(6.35) .250	<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>-02</td> <td>(7.85) .309</td> </tr> <tr> <td>-03</td> <td>(11.86) .467</td> </tr> <tr> <td>-04</td> <td>(12.37) .487</td> </tr> <tr> <td>-06</td> <td>(15.37) .605</td> </tr> <tr> <td>-07</td> <td>(17.35) .683</td> </tr> <tr> <td>-09</td> <td>(9.86) .388</td> </tr> </tbody> </table>		LEAD STYLE	OAL	-02	(7.85) .309	-03	(11.86) .467	-04	(12.37) .487	-06	(15.37) .605	-07	(17.35) .683	-09	(9.86) .388		
ROW OPTION	A																												
-S	(5.08) .200																												
-D	(6.35) .250																												
LEAD STYLE	OAL																												
-02	(7.85) .309																												
-03	(11.86) .467																												
-04	(12.37) .487																												
-06	(15.37) .605																												
-07	(17.35) .683																												
-09	(9.86) .388																												

TW	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	TAIL SPEC																																	
	02 thru 50	Specify LEAD STYLE from chart	-F = Gold flash on post, Matte Tin on tail  -L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail  -T = Matte Tin	-S = Single Row  -D = Double Row  -T = Triple Row  -Q = Four Row  -5 = Five Row  -6 = Six Row	- "XXX" = Stacker Height in inches (0.13 mm) .005" increments  Example: -250 = (6.35 mm) .250"	- "XXX" = Tail Length in inches (0.13 mm) .005" increments  Example: -150 = (3.81 mm) .150"  - "XXX" = Polarized Position (Specify position to be removed)																																	
				<table border="1"> <thead> <tr> <th>ROW OPTION</th> <th>STACKER HEIGHT</th> </tr> </thead> <tbody> <tr> <td>-S, -D*, -Q</td> <td>(3.05) .120 MIN</td> </tr> <tr> <td>-T, -5, -6</td> <td>(4.06) .160 MIN</td> </tr> </tbody> </table>		ROW OPTION	STACKER HEIGHT	-S, -D*, -Q	(3.05) .120 MIN	-T, -5, -6	(4.06) .160 MIN	<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>OAL</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(8.20) .323</td> </tr> <tr> <td>-02</td> <td>(9.60) .377</td> </tr> <tr> <td>-03</td> <td>(13.60) .535</td> </tr> <tr> <td>-04</td> <td>(14.10) .555</td> </tr> <tr> <td>-05</td> <td>(15.10) .594</td> </tr> <tr> <td>-06</td> <td>(17.10) .673</td> </tr> <tr> <td>-07</td> <td>(19.10) .751</td> </tr> <tr> <td>-08*</td> <td>(21.10) .830</td> </tr> <tr> <td>-09</td> <td>(11.60) .456</td> </tr> <tr> <td>-10</td> <td>(15.60) .614</td> </tr> <tr> <td>-11</td> <td>(10.08) .397</td> </tr> <tr> <td>-12*</td> <td>(28.19) 1.110</td> </tr> </tbody> </table>		LEAD STYLE	OAL	-01	(8.20) .323	-02	(9.60) .377	-03	(13.60) .535	-04	(14.10) .555	-05	(15.10) .594	-06	(17.10) .673	-07	(19.10) .751	-08*	(21.10) .830	-09	(11.60) .456	-10	(15.60) .614	-11	(10.08) .397	-12*	(28.19) 1.110
ROW OPTION	STACKER HEIGHT																																						
-S, -D*, -Q	(3.05) .120 MIN																																						
-T, -5, -6	(4.06) .160 MIN																																						
LEAD STYLE	OAL																																						
-01	(8.20) .323																																						
-02	(9.60) .377																																						
-03	(13.60) .535																																						
-04	(14.10) .555																																						
-05	(15.10) .594																																						
-06	(17.10) .673																																						
-07	(19.10) .751																																						
-08*	(21.10) .830																																						
-09	(11.60) .456																																						
-10	(15.60) .614																																						
-11	(10.08) .397																																						
-12*	(28.19) 1.110																																						