


LEADS: #24 (.020 DIA)
1/4 HARD, 52 ALLOY,
GOLD PLATED.

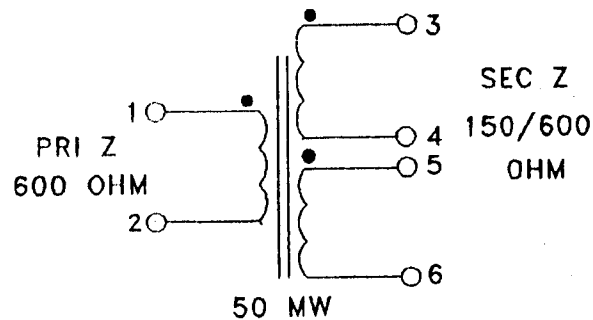

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS	1-2 = 70 NOM
	3-4 = 40 NOM
	5-6 = 45 NOM
APPLY: 2.8 V, 300 HZ, PINS 1-3	
OPEN CIRCUIT VOLTAGE	
EACH SEC = 1.35 TO 1.45 V	
OPEN CIRCUIT PRIMARY IMPEDANCE:	
1100 OHMS MIN.	
HIPOT: PRI TO SEC, 1000V	
SEC TO SEC, 500V	
THERMAL SHOCK: 10 CYCLES	
10MIN. COLD -55 C	
20 MIN. HOT 125 C	

0%

MagneTek

PAGE PART NO. SP-69