

# КНОПКИ ТАКТОВЫЕ


Рабочее напряжение. . . . . 12 В Сопротивление изолятора . . . . . 100 МОм  
 Предел. напряж. . . . . 250 В перем. тока в теч. 1 мин. Сопротивление контактов . . . . . 0,1 Ом  
 Рабочий ток. . . . . 0,05 А Рабочая температура . . . . . -25°С...+70°С

**TS-A1PS-130**

h=4.3 MM

**TS-A2PS-130**

h=5 MM



**TS-A3PG-130**



h=7 MM

**TS-A4PG-130**

h=9.5 MM

**TS-A6PG-130**

h=13 MM



**TS-A3PS-130**



h=7MM

**TS-A4PS-130**

h=9,5 MM

**TS-A6PS-130**

h=13 MM





**TS-A1PV-130**

h=4.3 MM

**TS-A2PV-130**

h=5 MM




**TS-A1PG-130**

h=4.3 MM

**TS-A2PG-130**

h=5 MM



**TS-A3PV-130**



h=7 MM

**TS-A4PV-130**

h=9,5 MM


**TS-A6PV-130**

h=12 MM




**DTS-32**

h=5.0 MM




**K1729**

h=7 MM



**DTSM-32**

h=5.0 MM

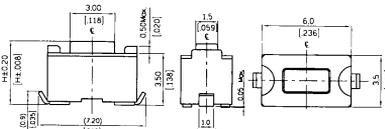

**DTSGL-61K**

h=2.5 MM

с заземлением

