

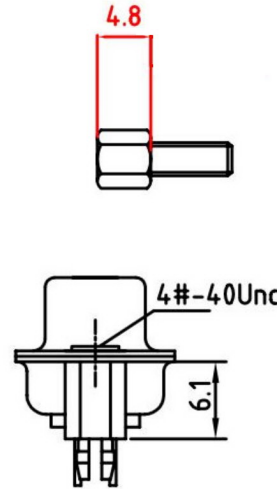


Recommend Layout PCB.

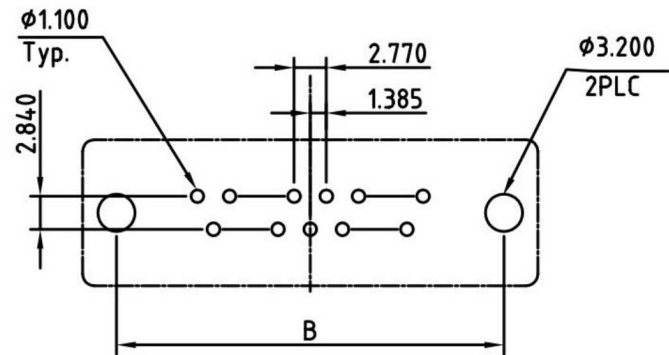

### ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.  
 Dielectric Withstanding Voltage:AC 500V at sea level.  
 Insulation Resistance:1000Megohms Min.  
 Contact Resistance:30Milliohms Max.  
 Operation Temperature : -55°C to +105°C.

### Material

Contact :Copper Alloy.  
 Insulator:PBT. (Select PA6T /LCP /PA9T)  
 Shell: SPCC.  
 Screw: Copper Alloy.

### Note:

No.	A	B	C	D
09	16.33	24.99	30.81	19.23
15	24.66	33.32	39.14	27.56
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.33

RoHS  
Compliant

**HSM** 玄茂科技股份有限公司  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD.  
核准 BETTY

DWG.  
製圖 BETTY

DATE 制表日  
2011/11/04

SCALE  
比例 參考

UNIT  
單位 M M

PAGE  
張數 1 OF 1

GENERAL TOLERANCE  
X ±0.30  
XX ±0.25  
XXX ±0.150  
Ang. ±2°

SIZE  
紙張尺寸 A 4

REV.  
版次 A

PART NAME 品名  
D-SUB PCB STRAIGHT TYPE STAMPED PIN XXP  
FEMALE REAR RIVET 6.0mm BOARLOCK  
LOOSE SCREWS ROHS

PART NO.  
料號 C0541-XXFIFXXXR