




# Sales Drawing

Scale( 5x )



Electrical Testing


As Xiangwei standard test plans and Mil-Std-202 Test Method.

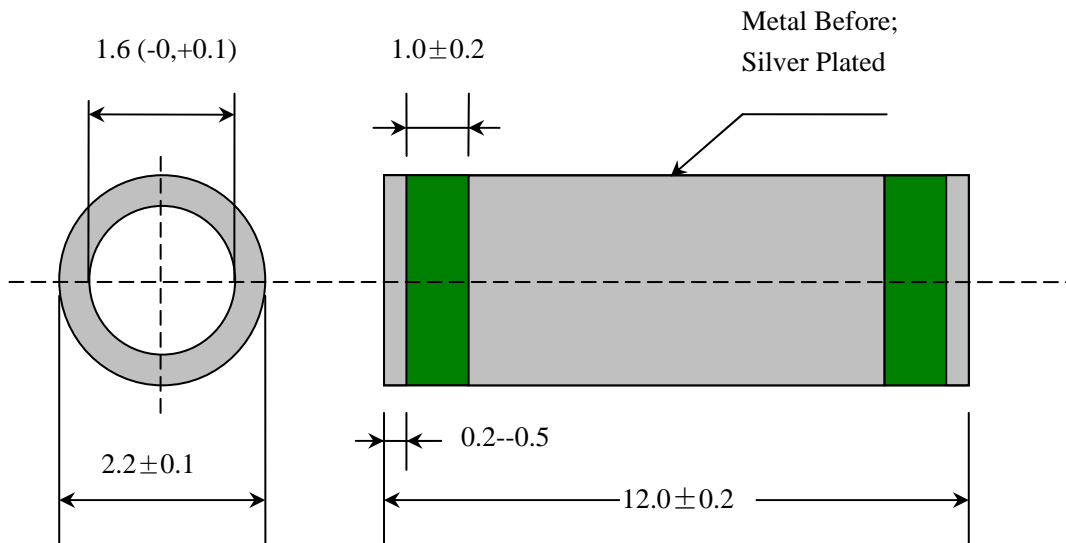

Notes:

- 1、 Do not use a hard object beat capacitor body.
- 2、 Storage:Usual temperature by sealed.it will be destroy if you keep them long at 125°C condition.
- 3、 Soldering:Using constant electric iron soldering,Do not use furnace welding and dip soldering methods.We recommend welding temperature at 280 degrees, preheating before welding temperature and time control in 3 seconds, should not be too long.
- 4、 RoHS-Lead Free.

SPECIFICATIONS	
Capacitance	10000pF
Dissipation Factor	< 3%
Tolerance	+80%,-20%
Temp Characteristic	Y5V
Rated Voltage	100VDC
Test Voltage	300VDC
Current (A)	
I.R. 100vdc	≥3000MΩ
Temp. Range	-25°C~ +85°C

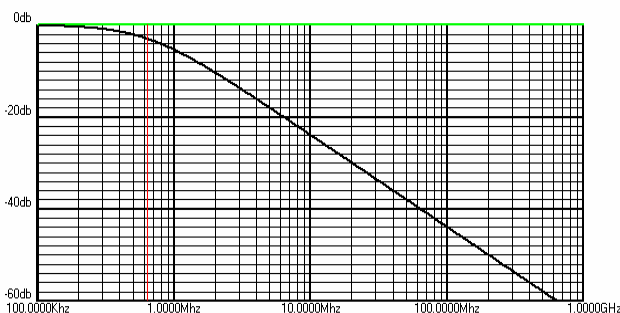

<b>-Tolerance-</b>	<b>Tubular Capacitor</b>
Unless otherwise specified	
Soldering Temp ≤ 280°C	Unit : (mm)
Soldering Time: 3 sec	
<b>XiangWei</b>	<b>G2222-005</b>