

# U S B A d a p t e r




Push Pull locking



USB type B



D-shape metal housing



USB type B




## USB Patch Cable



NKUSB-\*

- USB 2.0 compliant - data rate up to 480 MBit/s
- Dust and water resistant sealing in combination with NAUSB-W\*
- Push Pull mating design provides secure locking system if mated with NAUSB-W\*
- Shielded connection - high noise immunity and EMI protection
- Ready made patch cables (1 m, 3 m and 5 m) with removable rugged diecast cable carrier
- Mates with conventional USB receptacles if cable carrier is removed

### NKUSB

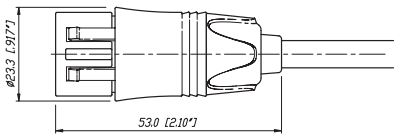


## USB Receptacle



NAUSB-W

- USB 2.0 gender changer type A-B (B-A)
- Ideal for audio networking and integration of computerbased equipment into audio systems
- Lockable connection and water protection if mated with Neutrik USB cable NKUSB-\*
- Optional screen to chassis grounding
- Reversible insert offering type A or B on front or rear end
- Universally accepted standard D-shape housing

### NAUSB-W

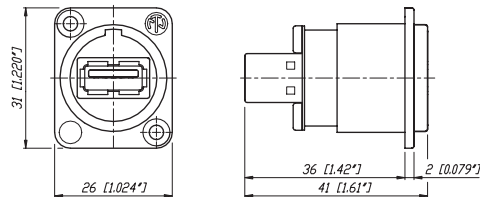

# U S B A d a p t e r

## Technical Data

### Mechanical and Electrical

	Receptacle	Patch Cable
Conform with USB 2.0 Standard	•	•

### Material

Shell	Zinc diecast (ZnAl4Cu1)	•	•
Shell plating	Nickel or black Chrome	•	Nickel
Insert		PBTP 15% GR	PVC
Contacts	Brass (CuZn39Pb3)	•	•
Contact finish	Gold	•	•

### Environmental

Operating temperature	-25°C to +85°C	•	•
Flammability	UL94 V-0	•	•

## Ordering Information

### Chassis

NAUSB-W	USB A – USB B Adapter (reversible), sealing ring, optional grounding, nickel housing
NAUSB-W-B	USB A – USB B Adapter (reversible), sealing ring, optional grounding, black housing

### Patch Cable

NKUSB-*	USB 2.0 cable with overmolded flex relief and metal cable carrier, standard lengths: 1, 3, 5 m
---------	--

## Accessories



DSS-\*



SCM



SCDX



SCDP-\*

DSS-*	Lettering plate for D series, colored plastic (*: 0- Black, 1- Brown, 2- Red, 3- Orange, 4- Yellow, 5- Green, 6- Blue, 7- Violet, 8- Grey, 9- White)
SCM	Plastic sealing cover to protect the Firewire connectors against dust and moisture.
SCDP-*	D-Size sealing gaskets, color coding (*: 0- black, 2- red, 4- yellow, 5- green, 6- blue, 9- white)
SCDX	Hinged cover seals D-size chassis connectors, IP42 rated
NZP1RU-8	Panel1RU housing with 8 D-shape cutouts
NZP1RU-12	Panel1RU housing with 12 D-shape cutouts

\*: 0 - Black, 1 - Brown, 2 - Red, 3 - Orange, 4 - Yellow, 5 - Green, 6 - Blue, 7 - Violet, 8 - Grey, 9 - White

