## 0.1" Pitch SPDT PCB Changeover Switch ESP SERIES



#### **FEATURES**

- The distance of 2 adjacent pins or stacked devices is 2.54 mm pitch
- All plastics are UL 94V-O grade fire retardant
- Low contact resistance and long mechanical life, suitable for signal switching and communication equipments

### **APPLICATIONS**

- Measuring point changeover switches
- Service switch
- Controls for consumer devices

# SPECIFICATIONS


## SPDT TYPE (ESP10,20,30,40 Series)

#### ELECTRICAL CHARACTERISTICS


Contact rating	0.2A, 24VDC; 0.5A, 12VDC
Minimum contact rating	1mA, 10mV
Contact resistance	Initial: 50mΩ Max.
	After life test: 100mΩ Max.
Dielectric strength	2mA, 500VDC for 60sec.
Capacitance	1.5pF Max.
Insulation resistance	10000MΩ Min. under 500VDC
Mechanical life	5000 operations

#### GENERAL CHARACTERISTICS

Temperature range	operating: -25°C ~ +70°C
	storage: -40°C ~ +85°C
Solder temperature	230°C for 3 sec.
Vibration	normal operation at 10Hz to 60Hz, 1.5mm movement
Salt spray	35℃, 5% for 24 hours

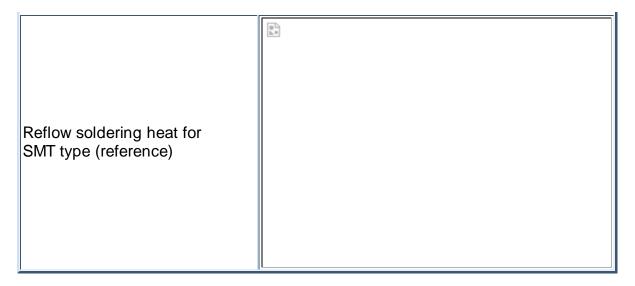


#### PART NUMBERING SYSTEM

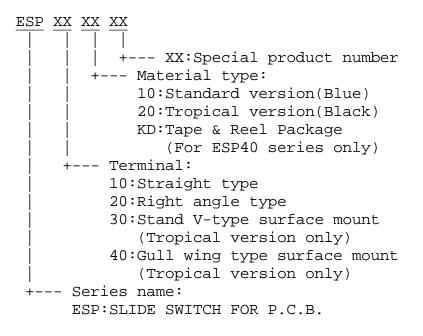


#### DIMENSIONS


Straight terminals

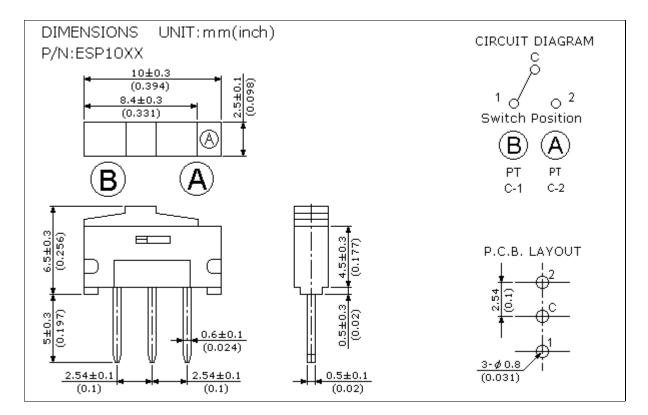

#### Right angle terminals

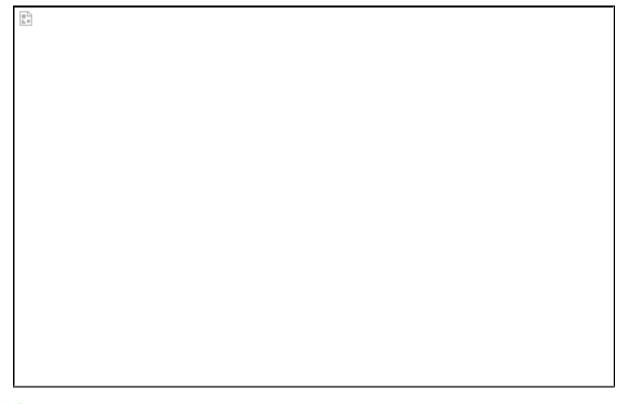

#### Stand V-type surface mount

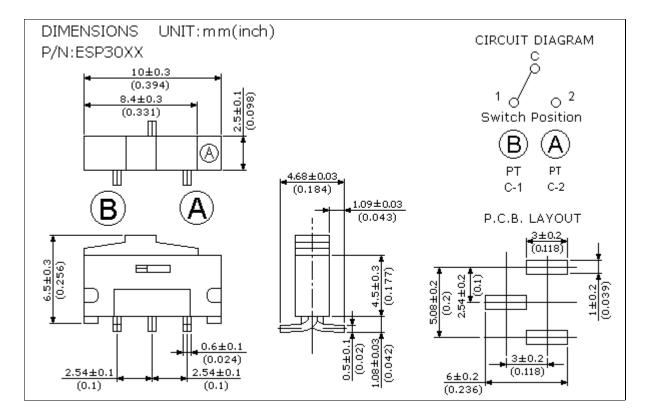

#### Gull wing type surface mount

