


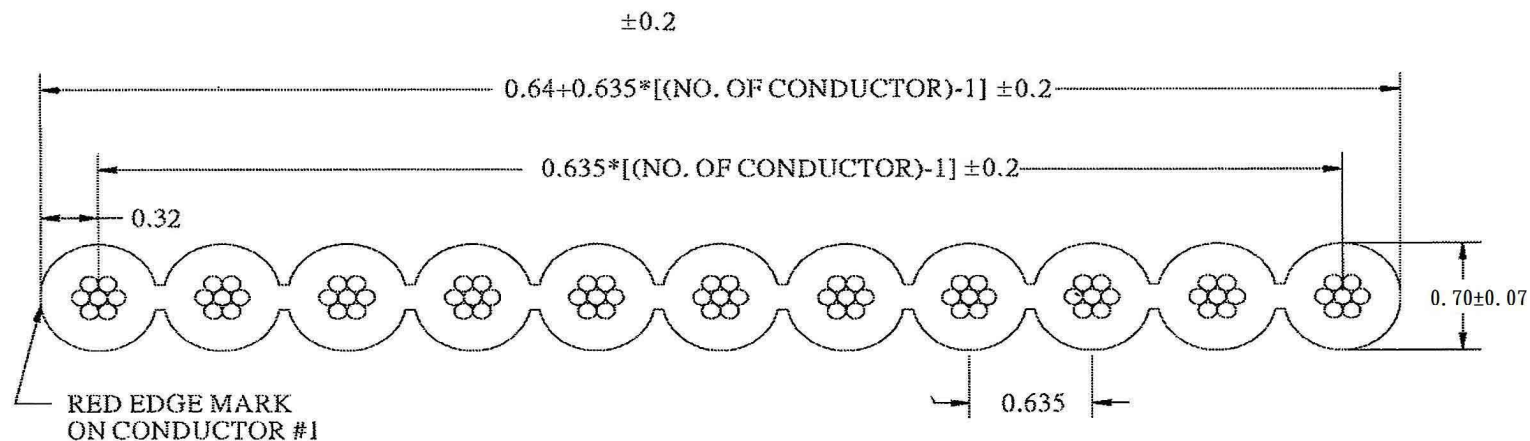

UL Style : 2678

Operating Temperature : -20°C to $+105^{\circ}\text{C}$

Flammability Rating : UL-VW-1

Voltage Rating : 150V

Physical

Insulation Material : Polyvinyl Chloride (PVC)

Conductor : #30AWG (7*0.102) Stranded Tinned Copper
#30AWG Solid Copper

Color : Grey With Red Edge

Electrical

Impedance : 75Ω (Unbalanced)

Capacitance : 22.5 pF/ft.

Inductance : .317 $\mu\text{H}/\text{ft}$

Propagation Delay : 1.7 ns/ft.

Insulation Resistance : $1\text{G}\Omega/\text{M min.}$

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准	SCALE 比例	TOLERANCE 容許公差 .0 $\pm$ 0.05 ANG. $\pm$	PART NAME 品名 FLAT CABLE 0.635mm UL2678 GREY COLOR XXP 30AWG PVC
DWG. 製圖 HELEN	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號 F0803-XXPXXX00R
DATE 制表日 2011/1/20	PAGE 張數 1 OF 1	REV. 版本 A	