



Sales Drawing

Scale(5x)




Electrical Testing

As Xiangwei standard test plans and Mil-Std-202 Test Method.



CIRCUIT

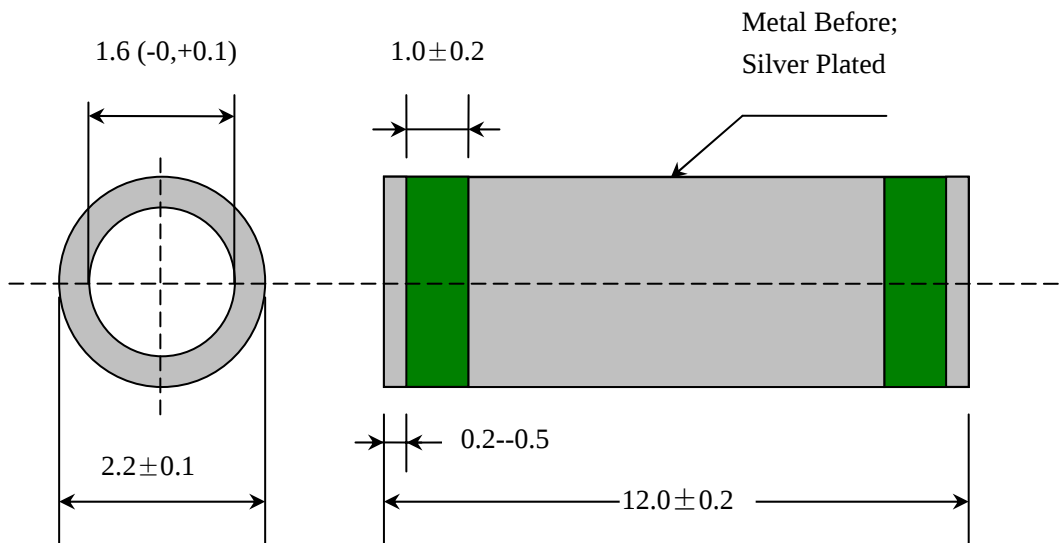


Notes:

- 1、 Do not use a hard object beat capacitor body.
- 2、 Storage:Usual temperature by sealed.it will be destroy if you keep them long at 125℃ condition.
- 3、 Soldering:Using constant electric iron soldering,Do not use furnace welding and dip soldering methods.We recommend welding temperature at 280 degrees, preheating before welding temperature and time control in 3 seconds, should not be too long.
- 4、 RoHS-Lead Free.

SPECIFICATIONS

Capacitance	5000pF*2
Dissipation Factor	<3%
Tolerance	+80%,-20%
Temp Characteristic	Y5V
Rated Voltage	100VDC
Test Voltage	300VDC
Current (A)	
I.R. 100vdc	≥3000M Ω
Temp. Range	-25℃~ +85℃

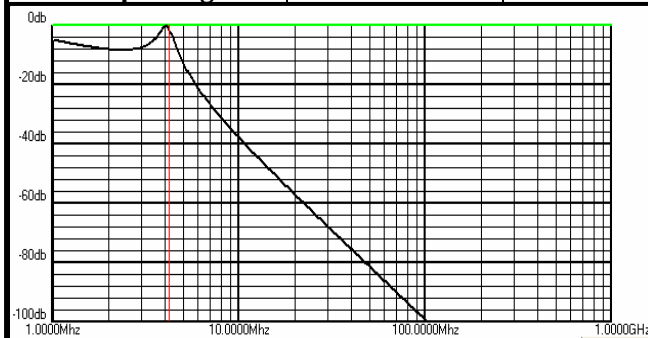

-Tolerance-

Unless otherwise specified

Soldering Temp ≤ 280℃

Soldering Time: 3 sec

Tubular Capacitor

Unit : (mm)

XiangWei

G2222-004