




更改/Change	签名/Sign	日期/Date
		240318

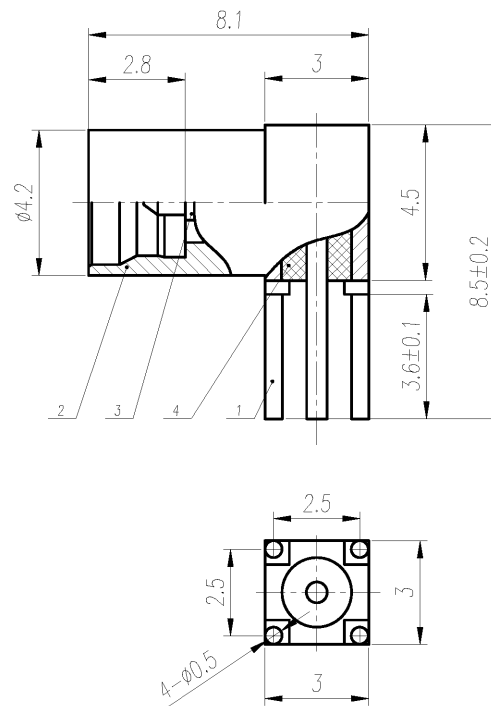

技术要求/ Technical requirements:

- 频率范围/Frequency Range: 0-40GHz
- 绝缘阻抗/Insulation impedance: $\geq 2000M\Omega$
- 接触电阻/Contact resistance: 外导体/Out conductor $\leq 5.00m\Omega$
内导体/In conductor $\leq 10.00m\Omega$
- 电压驻波比/Vswr: < 1.15 (DC-26GHz)
 < 1.4 (26-40GHz)
- 耐压/Withstand voltage: $> 500V@0.5mA$
- 盐雾满足96Hr/Salt spray test96Hr

4		绝缘体 PTFE	1		N/A
3		插针 Pin	1		磷铜镀金 Phosphorus copper plated Au
2		外壳 Body	1		不锈钢316钝化 Stainless steel 316 passivation
1		外壳 Body	1		黄铜镀金 Brass plated Au
序号/SN	料号/NO.	规格/Specifications	数量/Qty	单位/Unit	备注/Mark

未注公差表/Tolerance table not noted: 0-3mm ±0.20 10-18mm ±0.40 3-6mm ±0.25 18-30mm ±0.50 6-10mm±0.30 30-50mm ±0.60			视图/View	料号/NO.	1ASXLJQ111001
				型号/Type	
重量/ Wt (g)	1.7	版本/ Version	A1.0	SMP-JWHD (SOLDER PCB 4HOLE)	
设计/Design	Alan 2018-05-20				
审核/Check					
批准/Approved					
 艾尚讯 ASUN XUN 镇江艾尚讯电子有限公司 ZhenJiang Asunxun Electronics Co.,Ltd					