
Coil former for power applications with angled pins

Optimized for automatic winding
Material: GFR polyterephthalate (UL 94 V-0, insulation class to IEC 60085:
F ≙ max. operating temperature 155 °C), color code black
Valox 420-SE0 [E45329 (M)] SABIC INNOVATIVE PLASTICS B V
Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): 235 °C, 2 s
Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: 350 °C, 3.5 s
Winding: see Processing notes, 2.1

For matching clamp and insulating washer 1 see page 8.

Sections	A_N mm²	l_N mm	A_R value μΩ	Pins	Ordering code
1	15	30	69	8	B65808E1508T001

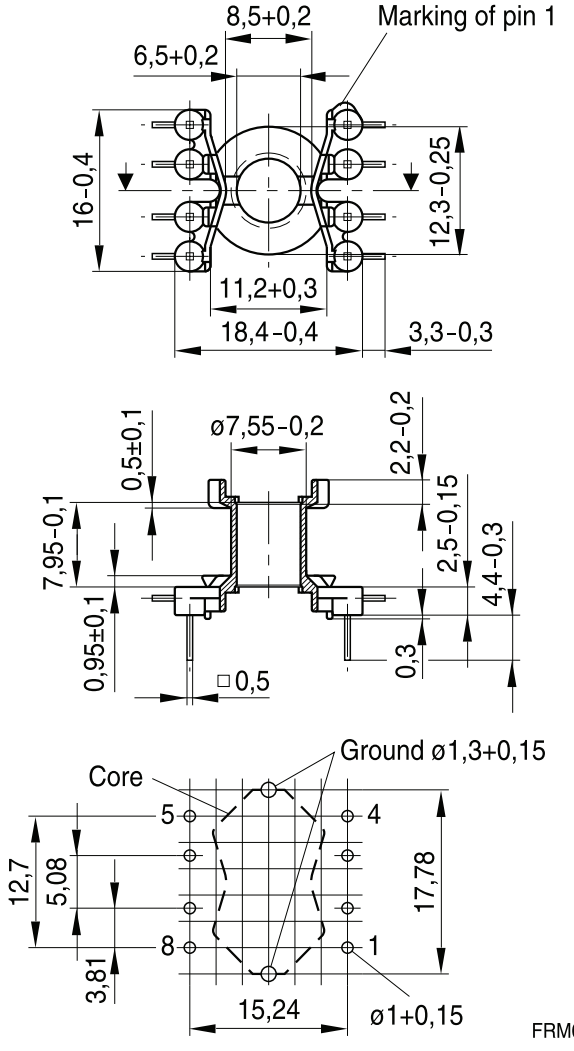

Hole arrangement
View in mounting direction