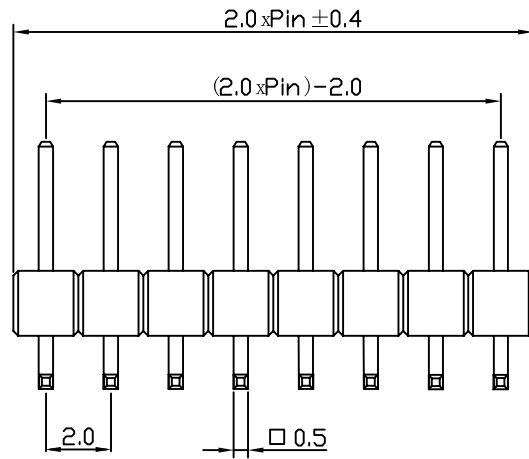
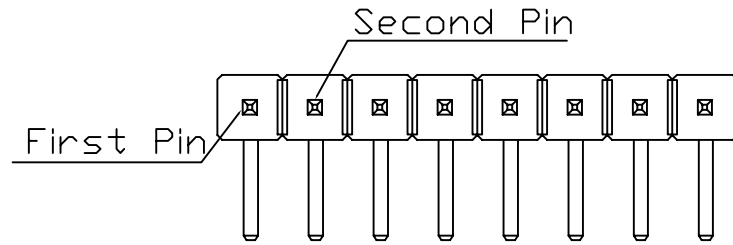


P.C.B. Layout

Materials

1. Contact: Brass
2. Insulator: PBT (UL 94V-0)
3. Contact plating: Gold over nickel

Specification

1. Contact resistance: 20m ohms Max
2. Insulator resistance: 1,000M ohms Min
3. Current rating: 2 Amp
4. Dielectric withstanding voltage: AC 500V
5. Operating temperature: -55°C to +105°C

Order information part number:

200G3-1LXX

NO. of contact
1x2 (2 Pin) to 1x40 (40 Pin)

Rev	Description/Date	Drawn By: Storm.li	Customer:	Third angle projection			X.±		
△		Checked By: Simmon	Part No.:	200G3-1LXX			.X±0.30		
△		Approved By: Tony	Title:	2.00mm pin header 90°			.XX±0.20		
SGS Report No.:						General Dimension Tolerance			.XXX±0.10