


FIBER SPECIFICATIONS						
ITEM #	OPERATING WAVELENGTH	MODE FIELD DIAMETER	NA	CLADDING	COATING	CUTOFF WAVELENGTH
SMF-28ULTRA	1260 - 1625 nm	9.2 ± 0.4 μm @ 1310 nm 10.4 ± 0.5 μm @ 1550 nm	0.14	125 ± 0.7 μm	242 ± 5 μm	<1260 nm

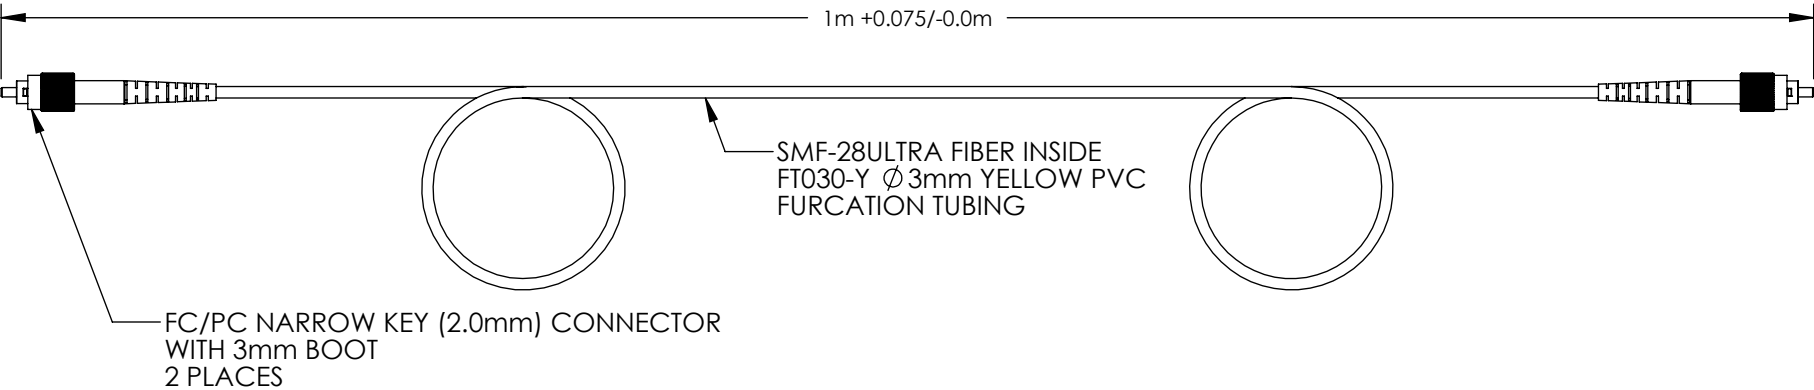

INCLUDED BUT NOT SHOWN:

- 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			<div>THORLABS</div> <div>www.thorlabs.com</div>	
	NAME	DATE		
DRAWN	BD	09/MAY/11	1m SMF-28ULTRA FC/PC PATCH CABLE	
APPROVAL	BAG	11/24/15	MATERIAL	REV D
COPYRIGHT © 2015 BY THORLABS			N/A	
VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUND OFF ERRORS			ITEM #	APPROX WEIGHT
			P1-SMF28E-FC-1	0.02 kg