


Features

- Wide 2 : 1 Input Range
- Highest Power Density in a DIP 24
- High Efficiency up to 85%
- Indefinite Short-circuit Protection
- I/O-Isolation 1'500 VDC
- Input Filter meets EN 55022, Class A and FCC, Level A without external Components
- Remote on/off
- Shielded Metal Case with insulated Baseplate
- 24-pin DIP with Industry Standard Pinout
- 2 Year Product Warranty

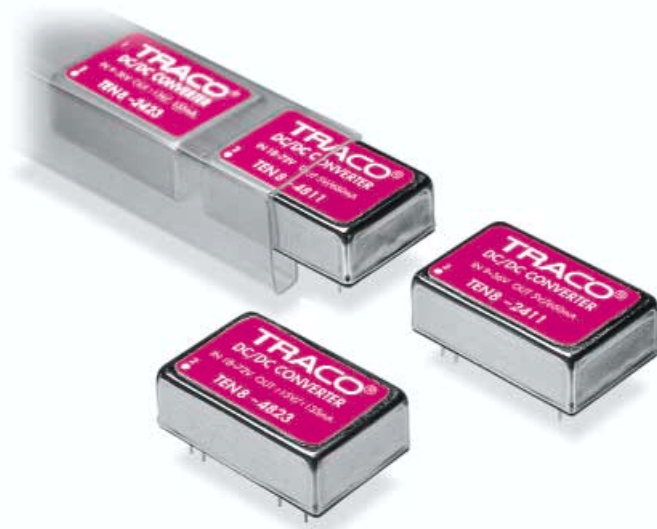

The TEN 8 series DC/DC converter has been designed for a wide range of space critical applications including tele- and data communication systems and industrial process control systems. The shutdown input feature makes these converters also ideal for mobile battery powered equipment. High efficiency allows operation up to 71°C without derating. Input filtering to EN 55022, class A and low output ripple minimize design-in time and cost.

Models				
Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 8-1210 TEN 8-1211 TEN 8-1212 TEN 8-1213 TEN 8-1221 TEN 8-1222 TEN 8-1223	9 – 18 VDC	3.3 VDC	2'000 mA	80 %
		5 VDC	1'500 mA	82 %
		12 VDC	665 mA	85 %
		15 VDC	535 mA	83 %
		± 5 VDC	± 800 mA	83 %
		± 12 VDC	± 335 mA	84 %
		± 15 VDC	± 265 mA	84 %
TEN 8-2410 TEN 8-2411 TEN 8-2412 TEN 8-2413 TEN 8-2421 TEN 8-2422 TEN 8-2423	18 – 36 VDC	3.3 VDC	2'000 mA	80 %
		5 VDC	1'500 mA	83 %
		12 VDC	665 mA	85 %
		15 VDC	535 mA	84 %
		± 5 VDC	± 800 mA	82 %
		± 12 VDC	± 335 mA	83 %
		± 15 VDC	± 265 mA	85 %
TEN 8-4810 TEN 8-4811 TEN 8-4812 TEN 8-4813 TEN 8-4821 TEN 8-4822 TEN 8-4823	36 – 75 VDC	3.3 VDC	2'000 mA	80 %
		5 VDC	1'500 mA	83 %
		12 VDC	665 mA	84 %
		15 VDC	535 mA	84 %
		± 5 VDC	± 800 mA	82 %
		± 12 VDC	± 335 mA	85 %
		± 15 VDC	± 265 mA	85 %

Input Specifications

Input current (no load)	12 Vin models:	20 mA typ.
	24 Vin models:	15 mA typ.
	48 Vin models:	10 mA typ.
Input current (full load)	12 Vin; 3.3 Vout models:	700 mA typ.
	12 Vin; other output models:	820 mA typ.
	24 Vin; 3.3 Vout models:	350 mA typ.
	24 Vin; other output models:	400 mA typ.
	48 Vin; 3.3 Vout models:	170 mA typ.
	48 Vin; other output models:	200 mA typ.
Surge voltage (100 msec. max.)	12 Vin models:	36 V max.
	24 Vin models:	50 V max.
	48 Vin models:	100 V max.
Conducted noise (input)	EN 55022 level A, FCC part 15, level A	

Output Specifications

Voltage set accuracy	± 2 %	
Regulation	– Input variation Vin min. to Vin max.	± 0.2 % max.
	– Load variation 25 – 100 %	
	– single output models	± 0.2 % max.
	– dual output models balanced load	± 1.0 % max.
	– dual output models unbalanced load	± 3.0 % max.
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max	
Temperature coefficient	± 0.02 % / °C	
Current limitation	> 110% of Iout max., foldback	
Short circuit protection	indefinite (automatic recovery)	
Capacitive load	3.3 Vout models:	3300 µF max.
	5 Vout models / ± 5 Vout models:	1600 µF max. / ± 1000 µF max.
	12 Vout models / ± 12 Vout models:	350 µF max. / ± 160 µF max.
	15 Vout models / ± 15 Vout models:	240 µF max. / ± 100 µF max.

General Specifications


Temperature ranges	– Operating	– 25 °C ... + 71 °C (no derating)
	– Case temperature	+ 100 °C max.
	– Storage	– 55 °C ... + 105 °C
Humidity (non condensing)	95 % rel H max.	
Reliability, calculated MTBF (MIL-HDBK-217 E)	>715'000 h @ + 25 °C	
Isolation voltage	– Input/Output	1'500 VDC
Isolation capacity	– Input/Output	300 pF max.
Isolation resistance	– Input/Output (500 VDC)	> 1000 M Ohm
Switching frequency	300 kHz typ. (Pulse width modulation PWM)	
Remote ON/OFF (optional):	– ON:	3.5 ... 12 VDC or open circuit.
	– OFF:	0 ... 1.2 VDC or short circuit pin 1 and pin 2/3
	– OFF idle current:	2.5 mA

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Physical Specifications

Case material	Copper nickel plated
Baseplate	plastic
Potting material	Epoxy (flammability to UL 94V-0)
Weight	17 g (0.60 oz)
Soldering temperature	max. 250 °C / 10 sec.

Outline Dimensions mm (inches)

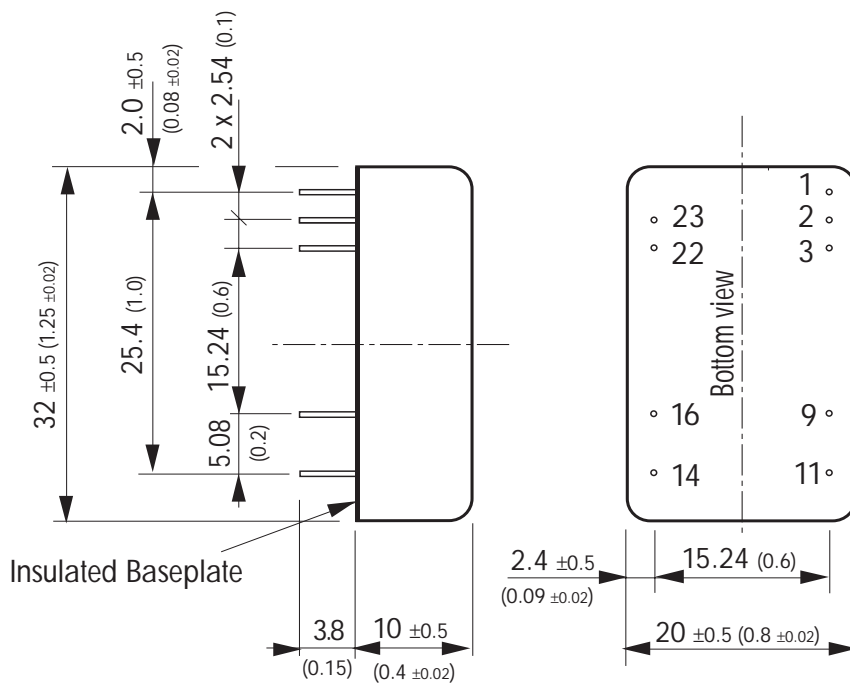

Pin-Out		
Pin	Single	Dual
1	Remote on/off	Remote on/off
2	-Vin (GND)	-Vin (GND)
3	-Vin (GND)	-Vin (GND)
9	No function	Common
11	No function	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin (Vcc)	+Vin (Vcc)
23	+Vin (Vcc)	+Vin (Vcc)

Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 ± 0.002)
Tolerances ± 0.5 (0.02)

Specifications can be changed without notice