

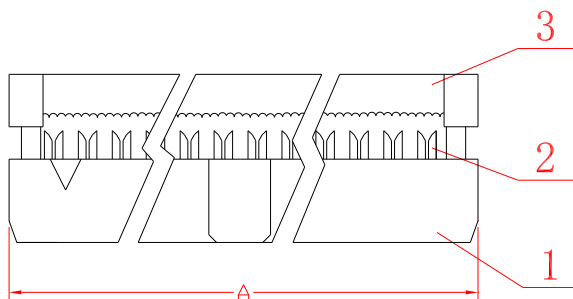


序号/RevNo.	名称/Title	文件编号/File No.
1	111塑料件主体	QJ/XYT-11117
2	111端子	QJ/XYT-11115
3	111中盖	QJ/XYT-11116

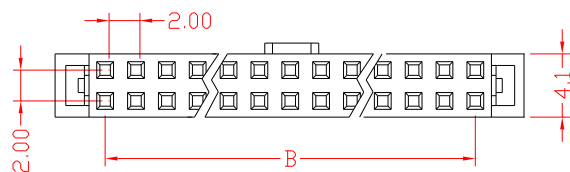

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature:-55°C--+105°C
 Contact: Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

Position	A	B
8	13.2	6.0
10	15.2	8.0
14	19.2	12.0
16	21.2	14.0
20	25.2	18.0
26	31.2	24.0
30	35.2	28.0
34	39.2	32.0
40	45.2	38.0
50	55.2	48.0
60	65.2	58.0
64	69.2	62.0

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. =0.2	x.' =2°
				.x =0.1	.x' =1°
				.xx =0.05	.xx' =0.5°
				.xxx =0.01	
图名/Title: 111产品图 文件编号/File No.: QJ/XYT-12019 页序/Sheet:				单位/Units: mm	
备注/Remark:					

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date