D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
3		Drawing Revise	Haoyh	05/13/06"
4		增加UL刻字	CSX	08/06/07"
5		品名、料号增加环保标示“(H)”	LJH	12/10/07"
6		修改料号	CSX	01/19/08"
7		图面更新	Zengy	09/05/08"

Notes:
1.Pitch:7.5mm ,Poles:2P-XXP
2.Rated voltage/current:UL 300V/15A
VDE 450V/20A
3.Operation temperatures:-30° C～+120° C
4.Insulation Withstand Voltage:AC2000V/1Min
5.Insulation Resistance:5000MΩ/DC1000V
6.Wire Range:22-14AWG,2.5mm²
7.Max.Torque Value:M2.5 ,4.08kgf.cm 7
8.Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
	over 6 to 10	over 10 to 24		over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒
to 6			to 30					⌭
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	005/10

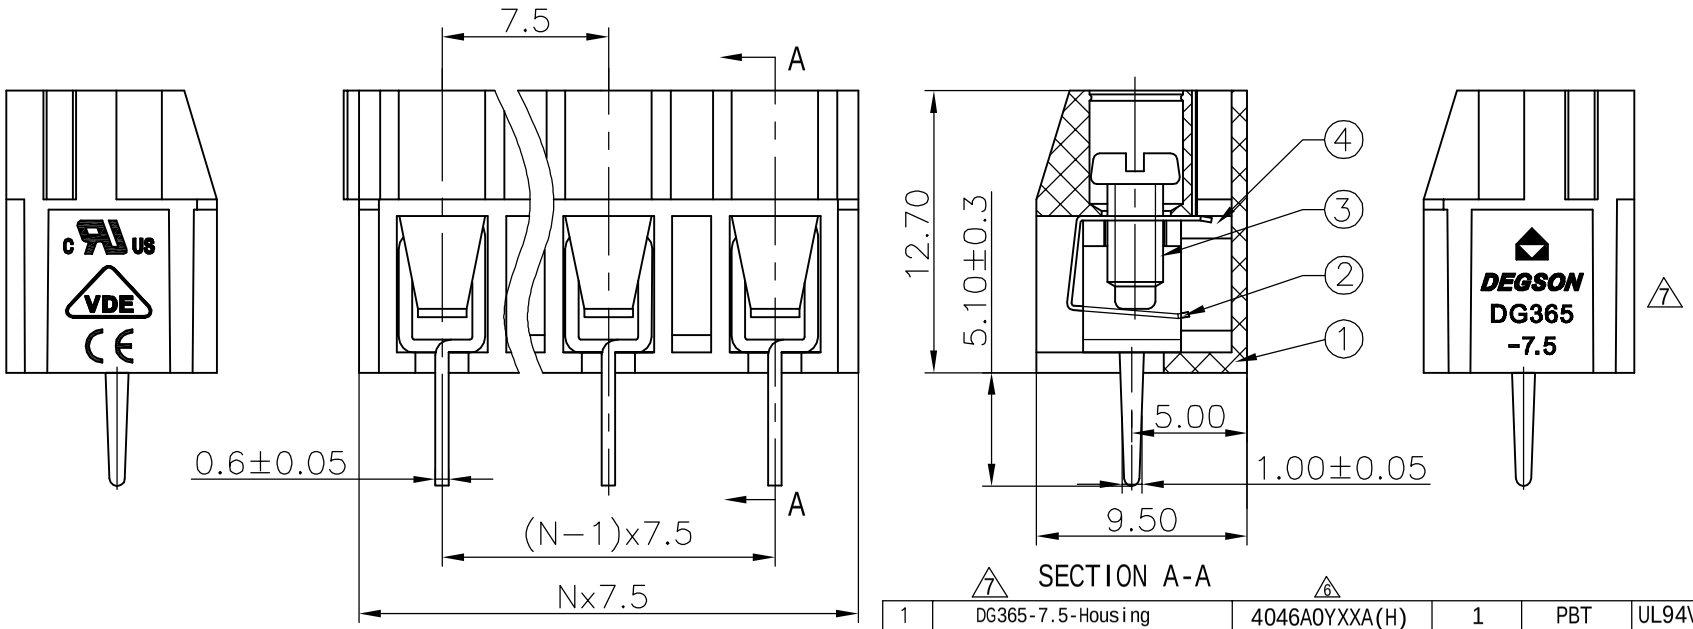

7 SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG365-7.5-Housing	4046A0YXXA(H) 6	1	PBT	UL94V-0
4	DG305-Pin header	4003B00010(H)	XX	Brass	SnCe
3	DG305-Screws	S000001620(H)	XX	Steel	$Cr^{3+}Zn$
2	DG305-Spring	X000000260(H)	XX	Phosphor bronze	Ni plated

DETACHED LISTS

MM (INCH)
TOLERANCES EXCEPT AS NOTED
MM
.0 ±
.00 ±
.000 ±
±
±
±
ANGLES ± 1°
THIRD ANGLE PROJECTION

DFTO Zhuwm	DATE 07/22/"04	
CHKD	DATE	
MFG	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE :		

DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME 5
DG365-7.5-XXP-1Y-00A(H)

DRAWING NO. DG365-7.5-E01 SIZE A3 REV T7 01/19/08
/PART NO.

DO NOT SCALE DRAWING SHEET 1 OF 1

8 7 6 5 4 3 2 1
H G F E D C B A

D1RFRD006

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
3		Drawing Revise	Haoyh	05/13/06"
4		增加UL刻字	CSX	08/06/07"
5		品名、料号增加环保标示“(H)”	LJH	12/10/07"
6		修改料号	CSX	01/19/08"
7		图面更新	Zengy	09/05/08"

Notes:
1.Pitch:7.5mm ,Poles:2P-XXP
2.Rated voltage/current:UL 300V/15A
VDE 450V/20A
3.Operation temperatures:-30° C～+120° C
4.Insulation Withstand Voltage:AC2000V/1Min
5.Insulation Resistance:5000MΩ/DC1000V
6.Wire Range:22-14AWG,2.5mm²
7.Max.Torque Value:M2.5 ,4.08kgf.cm 7
8.Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
	over 6 to 10	over 10 to 24		over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒
to 6			to 30					⌭
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	005/10

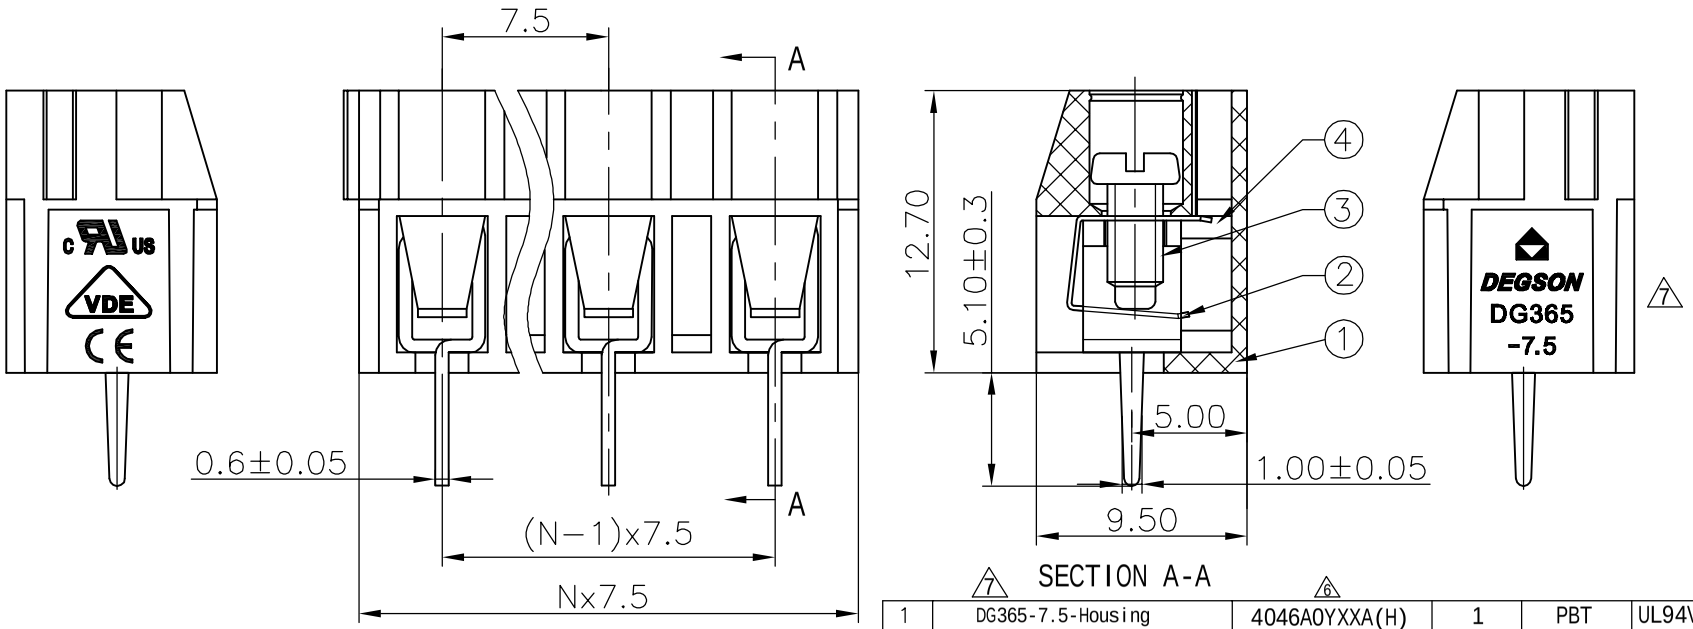

7 SECTION A-A

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG365-7.5-Housing	4046A0YXXA(H) 6	1	PBT	UL94V-0
4	DG305-Pin header	4003B00010(H)	XX	Brass	SnCe
3	DG305-Screws	S000001620(H)	XX	Steel	$Cr^{3+}Zn$
2	DG305-Spring	X000000260(H)	XX	Phosphor bronze	Ni plated

DETACHED LISTS

MM (INCH)
TOLERANCES EXCEPT AS NOTED
MM
.0 ±
.00 ±
.000 ±
±
±
±
ANGLES ± 1°
THIRD ANGLE PROJECTION

DFTO Zhuwm	DATE 07/22/"04	
CHKD	DATE	
MFG	DATE	
APPVL	DATE	
MATERIAL :		
G.E :		
FINISH :		
SCALE :		

DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME 5
DG365-7.5-XXP-1Y-00A(H)

DRAWING NO. DG365-7.5-E01 SIZE A3 REV T7 01/19/08
/PART NO.

DO NOT SCALE DRAWING SHEET 1 OF 1

8 7 6 5 4 3 2 1
H G F E D C B A