



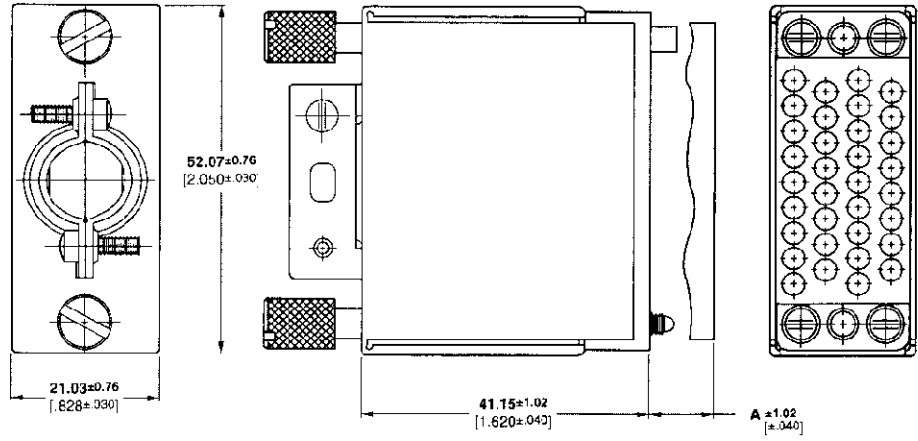

M Series Connectors (Continued)

V.35

Cable Connector Kits

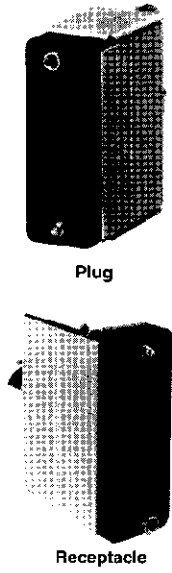

Material and Finish:

Housing — Flame retardant phenolic or polyester, black

Shield — Anodized aluminum

Screws — Steel, zinc plated

Jackscrews — Stainless steel/zinc

Cable Clamp — Steel, nickel plated

Kits include:

- Housing
- One-piece shield
- One-piece turnable jackscrews
- Strain relief clamp
- Mounting screws

Notes:

1. Plug and receptacle connector kits come partially assembled
2. Plug connector kits are available with long and short shields, (long shield provides pin protection) and two different size cable clamps.
3. Housings are keyed to assure the proper location of the male and female jackscrew as defined by 408-2593.
4. Pin and socket contacts sold separately. Size 16, Type III+ contacts are listed on page 546.

Packaging	Cable Range Dia.	Housing Material	Jackscrew Type	Part Numbers	
				Receptacle	Plug
Bulk	11.05-13.83 .435-.545	Polyester	Stainless Steel	213931-1	213932-1
Individual	7.62-11.43 .300-.450	Polyester	Stainless Steel	213931-2	213932-2
Individual	11.05-13.83 .435-.545	Polyester	Zinc	213931-3	213932-3
Individual	11.05-13.83 .435-.545	*	Zinc	213931-4	—
Individual	7.62-11.43 .300-.450	Polyester	Zinc	213931-5*	213932-4*
Individual	7.62-11.43 .300-.450	Polyester	Zinc	—	213932-5**

*Housing not included in Kit No. 213931-4
**Long Shield, Assembled Length — 41.15±1.20 [1.620±.040]
•Dim A not applicable in polyester versions

Shield Size	Cable Range	Housing Material	Dimension A	Part Numbers	
				Receptacle	Plug
Short	11.05-13.83 .435-.545	Phenolic	38.86 1.53	213522-1	213300-1
Short	7.62-11.43 .300-.450	Phenolic	38.86 1.53	213522-2	213300-2
Long	11.05-13.83 .435-.545	Phenolic	50.04 1.97	—	213300-3
Long	7.62-11.43 .300-.450	Phenolic	50.04 1.97	—	213300-4
Short	5.08-7.62 .200-.300	Phenolic	38.86 1.53	—	213300-7