

Types B, 2B, C, 2C, M, Q, 2Q, R, R (HE 11), 2R

Page

Technical characteristics	01.10
Type B male connectors	01.11
Interface connector U type B	01.12
Type B female connectors	01.13
Type 2B male connectors	01.16
Type 2B female connectors	01.17
Type C male connectors	01.18
Type C female connectors	01.19
Pin shroud type C	01.24
Pin shroud · Application examples	01.25
Type 2C male connectors	01.26
Type 2C female connectors	01.27
Type M male connectors	01.28
Type M female connectors	01.29
Special contacts type M	01.30
Type M-flat female connectors	01.32
Type R male connectors	01.34
Type R female connectors	01.35
Type R (HE 11) male connectors	01.36
Type R (HE 11) female connectors	01.37
Type Q male connectors	01.38
Type 2Q male connectors	01.39
Type 2R male connectors	01.40
Type Q, 2Q and 2R female connectors	01.41
Coding systems types B, C, D and E	01.42

Number of contacts	16-96
Contact spacing (mm)	2.54
Working current see current carrying capacity chart	2 A max. 1 A with insulation displacement 40 A max. type M
Clearance	≥ 1.2 mm
Creepage	≥ 1.2 mm
Working voltage The working voltage also depends on the clearance and creepage dimensions of the pcb itself, and the associated wiring	according to the safety regulations of the equipment Explanations see chapter 00
Test voltage $U_{r.m.s.}$	1 kV
Contact resistance	≤ 15 mΩ for wire wrap connection ≤ 20 mΩ including crimp connection
Insulation resistance	≥ 10 ¹² Ω
Temperature range The higher temperature limit includes the local ambient and heating effects of the contacts under load	- 55 °C ... + 125 °C
Degree of protection for crimp terminal IP 20 according to DIN 40 050	

Electrical termination	
Male connector	Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3 For pcb connection Ø 0.8 + 0.3 mm on request wrap posts 0.6 x 0.6 mm diagonal 0.79-0.86 mm
Female connector	wrap posts 0.6 x 0.6 mm diagonal 0.79-0.86 mm Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3 For pcb connection Ø 0.8 + 0.3 mm on request Crimp terminal 0.09-0.5 mm ² Insulation displacement connection AWG 28/7

Insertion and withdrawal force	16way ≤ 15 N 32way ≤ 30 N 48way ≤ 45 N 64way ≤ 60 N 96way ≤ 90 N
--------------------------------	--


Materials	
Mouldings	Thermoplastic resin, glass-fibre filled, UL 94-V0
Contacts	Copper alloy
Contact surface	Contact zone: selectively plated according to performance level ¹⁾ Termination zone: tinned Wrap posts: selectively gold-plated on request

¹⁾ Explanation performance levels see chapter 00
Mating conditions see chapter 00

Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

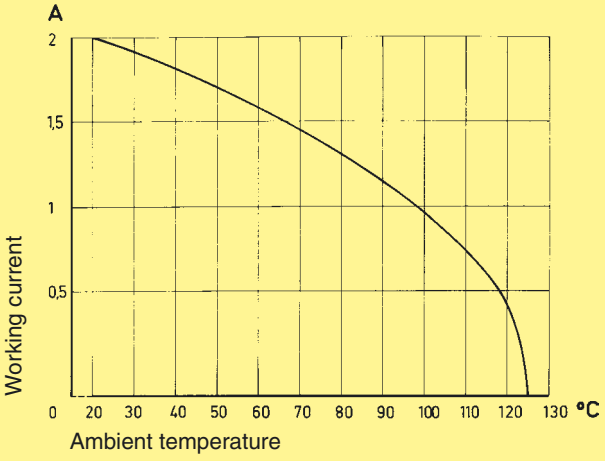

Pin shroud for female connectors with 0.6 x 0.6 mm pins according to DIN 41 612

A secure interfacing system for signals from the rear of 19" racks to connectors with wrap posts 0.6 x 0.6 mm is possible with the use of a pin shroud.

The pin shroud protects the wrap posts on the rear side of the rack and can be screwed to the printed circuit board.

After assembly the rear ends of the wire wrap posts become the mating areas of the type C male connector according to DIN 41 612.

This system can now accept:

- female connectors type C
- female connectors type R

The locking levers provide security for the mated connectors. Fast and simple disconnection is possible.


Fitting and removing crimp contacts

see technical characteristics chapter 02

Types signal to 2 A

Number of contacts


64, 32

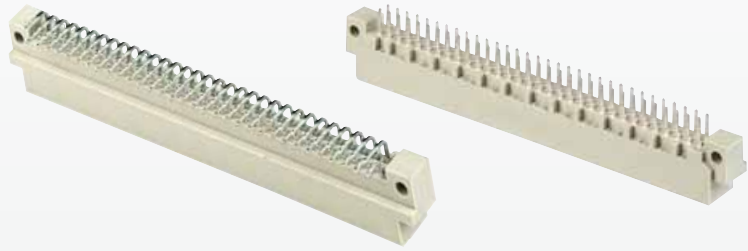

Male connectors


Identification	Number of contacts	Contact arrangement	Part No.			Performance levels according to DIN 41 612. Explanation chapter 00		
			3	2	1	3	2	1
Male connector with angled solder pins	64		09 02 164 7921	09 02 164 6921	09 02 164 2921	09 02 164 7921	09 02 164 6921	09 02 164 2921
	32		09 02 132 7921	09 02 132 6921	09 02 132 2921	09 02 132 7921	09 02 132 6921	09 02 132 2921
	32		09 02 132 7931	09 02 132 6931	09 02 132 2931	09 02 132 7931	09 02 132 6931	09 02 132 2931
	62 + 2 [▲]		09 02 164 7951	09 02 164 6951	09 02 164 2951	09 02 164 7951	09 02 164 6951	09 02 164 2951
Male connector with straight solder pins	64		09 02 164 7922	09 02 164 6922	09 02 164 2922	09 02 164 7922	09 02 164 6922	09 02 164 2922
	32		09 02 132 7922	09 02 132 6922	09 02 132 2922	09 02 132 7922	09 02 132 6922	09 02 132 2922
	32		09 02 132 7932	09 02 132 6932	09 02 132 2932	09 02 132 7932	09 02 132 6932	09 02 132 2932
	62 + 2 [▲]		09 02 164 7952	09 02 164 6952	09 02 164 2952	09 02 164 7952	09 02 164 6952	09 02 164 2952

Dimensions

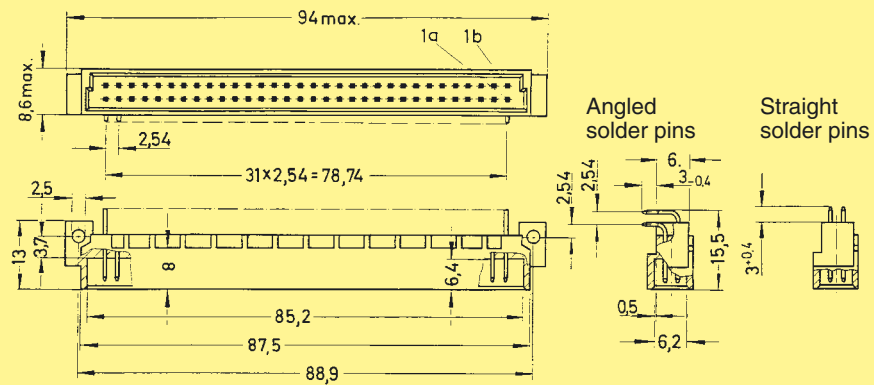

Board drillings

Mounting side

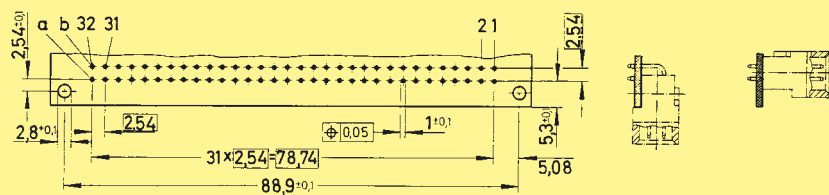


Dimensions in mm

[▲] Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
Other contact arrangements on request

Number of contacts

64

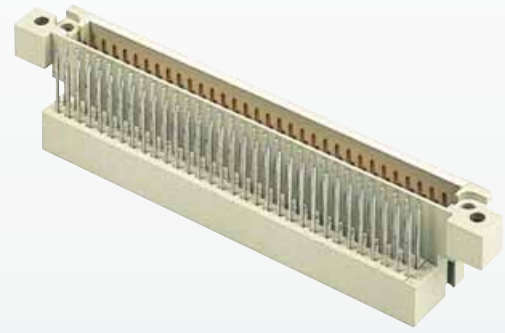


Interface connector U

Types signal to 2 A

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
Interface connector U with wrap posts 0.6 x 0.6 mm	64	Performance level 1 09 02 064 2981		
Locking screw 1) Order 2 pieces for one interface connector U		09 02 000 9923 ¹⁾	<p>M 2.5 x 22 DIN EN ISO 1207</p>	
Mounting example				<p>M 2.5 x 22 DIN EN ISO 1207</p> <p>M 2.5 x 12 DIN EN ISO 1207</p> <p>A-B</p>

Number of contacts

64

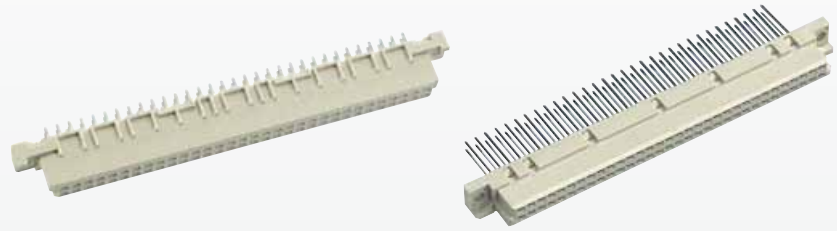


Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm	64		Performance level 3 on request	09 02 264 6824	Performance level 1 on request	
Female connector with solder pins 4.5 mm	64			09 02 264 6825		
Female connector with wrap posts 13 mm	64			09 02 264 6821		


Female connector with press-in pins

Part Nos. and variants see chapter 04


Dimensions

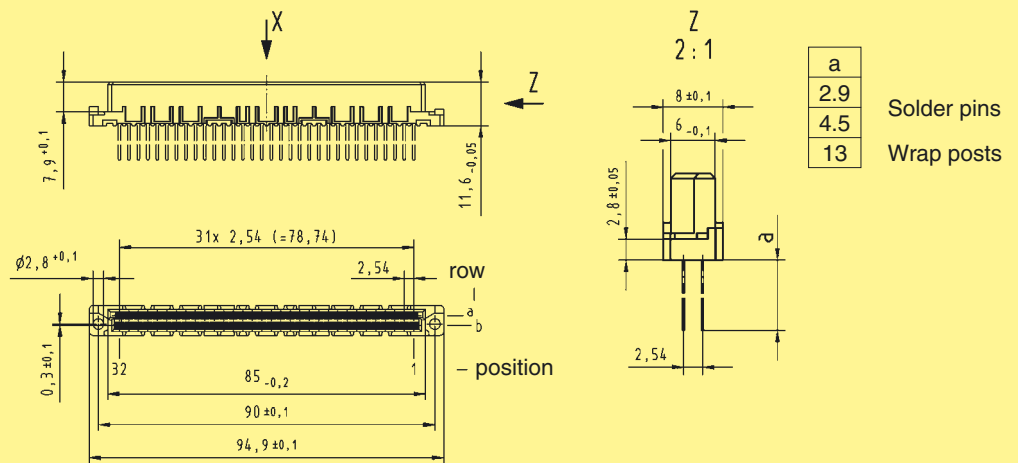

Panel cut out

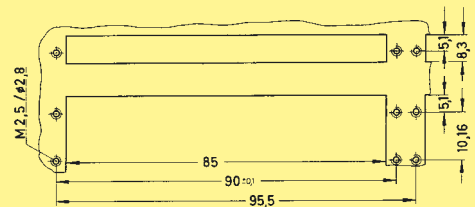

Board drillings Mounting side

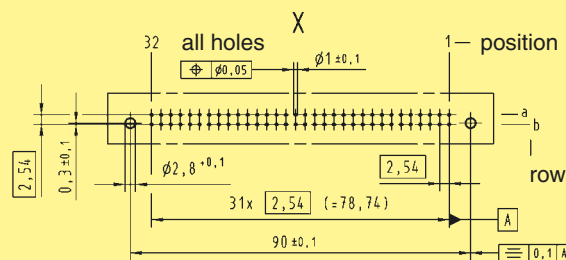

Identification strips see chapter 40

Dimensions in mm

Number of contacts

64



Female connectors

Types signal to 2 A

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
Female connector for insulation displacement	64	Performance level 2 09 02 264 6828 Performance level 3 09 02 264 7828	<p>Cable 1 to contact 1 b Contact arrangement View from termination side</p>	
Panel cut out				
Flat cable AWG 28/7 grey 50.00 m grey 150.00 m colour coded 30.48 m twisted pair ¹⁾ 30.48 m	64	09 18 064 7001 09 18 064 7004 09 18 064 7005 09 18 064 7006	<p>¹⁾ Termination area spacing = 508 mm</p> <p>Important: always store reels vertically</p> <p>Wire (tinned) Cu Gauge AWG 28/7 0.089 mm² Insulation material as per UL 2651 PVC</p>	
Round flat cable ²⁾ with screening 30 m screening 150 m without screening 30 m screening 150 m	64	09 18 064 7007 09 18 064 7010 09 18 064 7008 09 18 064 7011	<p>²⁾ Termination area spacing = 100 mm</p>	
Bench press		09 99 000 0114		
Base plate		09 99 000 0150		
Flat cable cutter		09 99 000 0116		
Spare parts				
Blade		09 99 000 0179		
Cutting plate		09 99 000 0180		



Number of contacts

max. 64



Female connectors

Types signal to 2 A

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
<p>Female connector for crimp contacts</p> <p>Order contacts separately</p>	64	09 02 064 3214	<p>85, 84, 11.6, 11, 6, 2.9^{+0.5}, 7.5, 90^{±0.1}, 2.8^{+0.1}, 1b, 1a, 2.55, 5, 6.1^{+0.2}, 2.54, 31x2.54=78.74, 95^{-0.4}</p> <p>Contact arrangement View from termination side</p> <p>32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1</p>	<p>Shell housing 09 02 064 0501 / 09 02 064 0502 see chapter 20</p>

Identification	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00
	2	1
<p>Female crimp contacts BC</p>		
<p>Bandoliered contacts (approx. 5,000 pieces)</p>	09 02 000 6484	09 02 000 6474
<p>Bandoliered contacts (approx. 500 pieces)</p>	09 02 000 8434	09 02 000 8444
<p>Individual contacts (1,000 pieces)</p>	09 02 000 8484	09 02 000 8474
	<p>Wire gauge mm² AWG Insulation ø mm</p> <p>0.09 - 0.5 28 - 20 0.7 - 1.5</p>	<p>Bandoliered contacts</p> <p>Individual contacts</p>
	<p>3.5 + 0.5 mm of insulation is stripped</p> <p>Insertion, removal and crimping tools see chapter 30</p>	

DIN 41 612 · complementary type 2B



Number of contacts

32, 16




Male connectors

Types signal to 2 A


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Male connector with angled solder pins	32		09 22 132 7921	09 22 132 6921	09 22 132 2921	
	16		09 22 116 7931	09 22 116 6931	09 22 116 2931	
	30 + 2 [▲]		09 22 132 7951	09 22 132 6951	09 22 132 2951	
Male connector with straight solder pins	32		09 22 132 7922	09 22 132 6922	09 22 132 2922	
	16		09 22 116 7932	09 22 116 6932	09 22 116 2932	
	30 + 2 [▲]		09 22 132 7952	09 22 132 6952	09 22 132 2952	

Dimensions

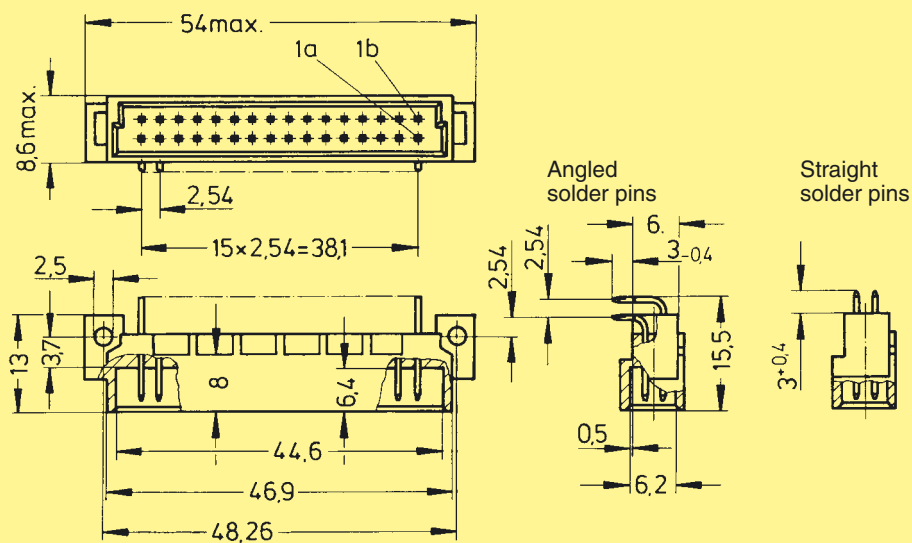

Board drillings

Mounting side

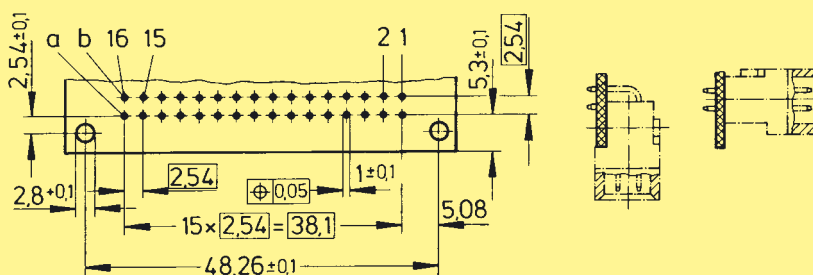


Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a16]
Other contact arrangements on request

Number of contacts


32

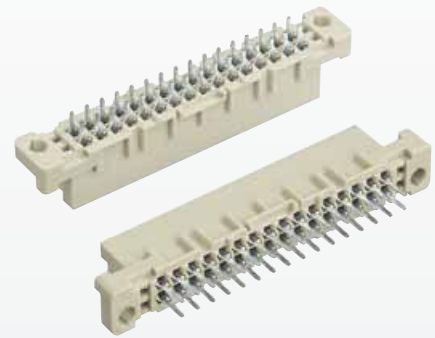


Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm	32		Performance level 3 on request	09 22 232 6824	Performance level 1 on request	
Female connector with solder pins 4.5 mm	32			09 22 232 6825		
Female connector with press-in pins	Part Nos. and variants see chapter 04					


Dimensions

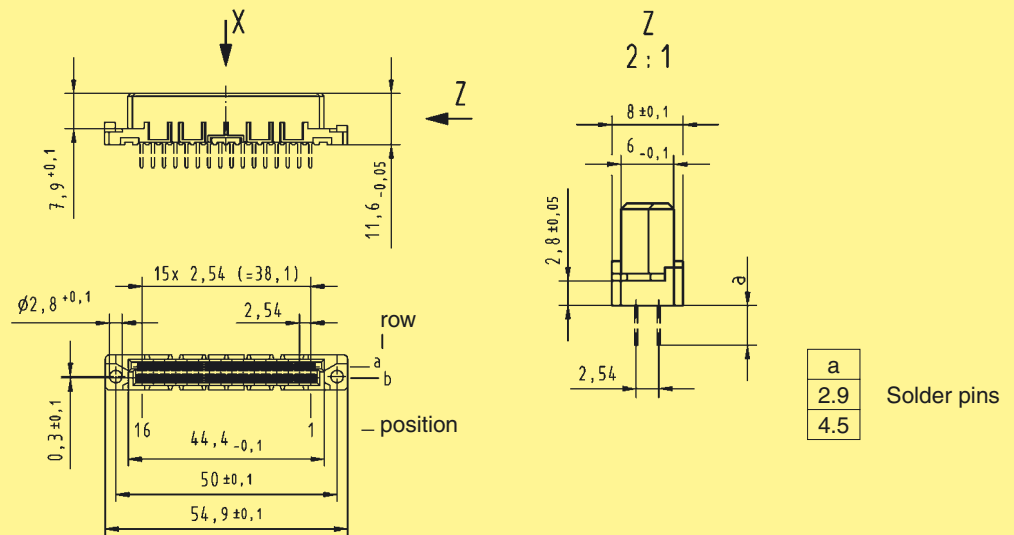

Panel cut out

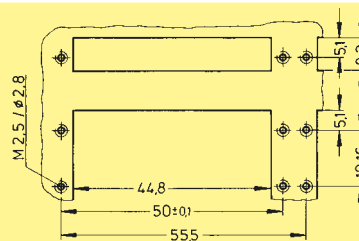

Board drillings Mounting side

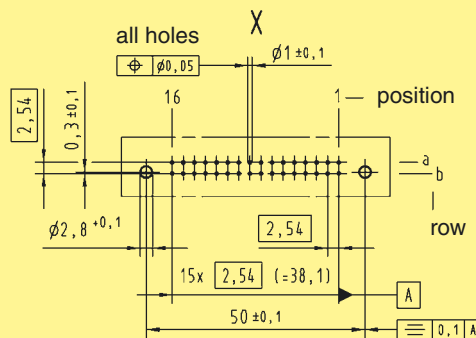


Dimensions in mm

Types signal to 2 A

Number of contacts


96, 64, 32

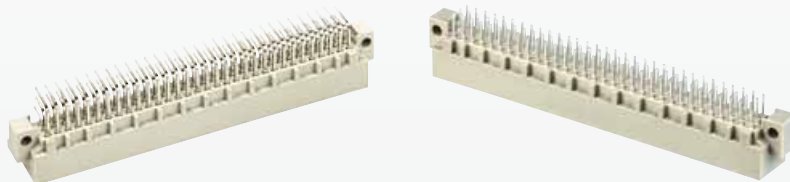

Male connectors


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Male connector with angled solder pins	96		09 03 196 7921	09 03 196 6921	09 03 196 2921	
	64		09 03 164 7921	09 03 164 6921	09 03 164 2921	
	32		09 03 132 7921	09 03 132 6921	09 03 132 2921	
	94 + 2 [▲]		09 03 196 7951	09 03 196 6951	09 03 196 2951	
	62 + 2 [▲]		09 03 164 7951	09 03 164 6951	09 03 164 2951	
Male connector with straight solder pins	96		09 03 196 7922	09 03 196 6922	09 03 196 2922	
	64		09 03 164 7922	09 03 164 6922	09 03 164 2922	

Dimensions

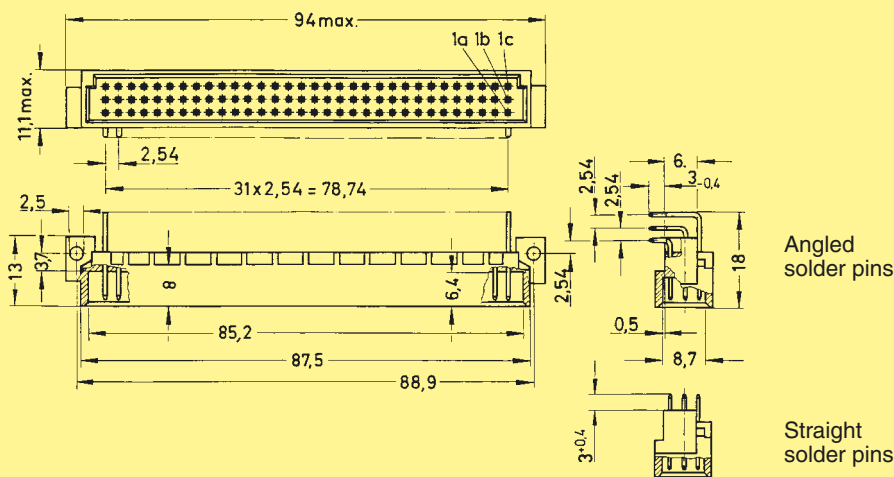

Board drillings

Mounting side

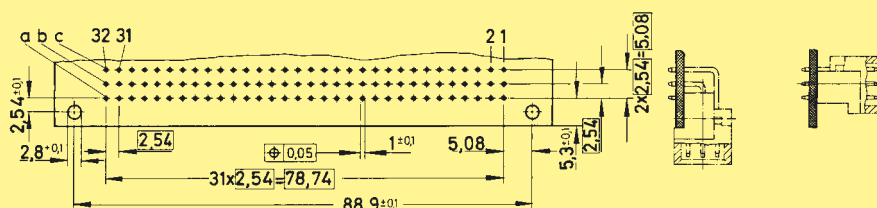


Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
 Other contact arrangements on request
 High temperature connectors see chapter 05

Number of contacts

max. 96

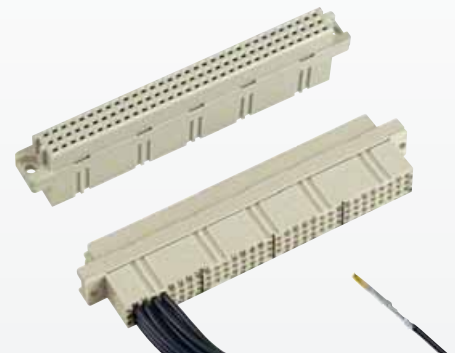

Female connectors

Types signal to 2 A

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
<p>Female connector for crimp contacts</p> <p>Order contacts separately</p>	96	09 03 096 3214	<p>2 x 2,54 = 5,08</p> <p>2,8^{+0,1}</p> <p>90^{+0,1}</p> <p>1c 1b 1a</p> <p>2,54</p> <p>31 x 2,54 = 78,74</p> <p>95^{-0,4}</p> <p>85</p> <p>8,5</p> <p>11,6</p> <p>11</p> <p>2,9^{+0,5}</p> <p>10</p> <p>5,1</p> <p>1,5</p> <p>10,6^{-0,2}</p> <p>View from termination side</p> <p>32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1</p> <p>Shell housing 09 03 096 0501 see chapter 20</p>	

Identification	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00
		2 1
Female crimp contacts BC		
Bandoliered contacts (approx. 5,000 pieces)	09 02 000 6484	09 02 000 6474
Bandoliered contacts (approx. 500 pieces)	09 02 000 8434	09 02 000 8444
Individual contacts (1,000 pieces)	09 02 000 8484	09 02 000 8474

Wire gauge mm ²	AWG	Insulation ø mm
0.09 - 0.5	28 - 20	0.7 - 1.5



3.5 + 0.5 mm of insulation is stripped from the wires to be crimped
 Insertion, removal and crimping tools see chapter 30

Number of contacts

96, 64, 32




Female connectors

Types
signal to 2 A

Identification	Number of contacts	Contact arrangement	Performance levels according to DIN 41 612. Explanation chapter 00		
			Part No. 3	2	1
Female connector with solder pins 2.9 mm	96		09 03 296 7824	09 03 296 6824	09 03 296 2824
	64		09 03 264 7824	09 03 264 6824	09 03 264 2824
	32		09 03 232 7824	09 03 232 6824	09 03 232 2824
	32		09 03 232 7834	09 03 232 6834	09 03 232 2834
Female connector with kinked solder pins ¹⁾ 2.9 mm	96		09 03 296 7855	09 03 296 6855	09 03 296 2855
	64		09 03 264 7855	09 03 264 6855	09 03 264 2855
	32		09 03 232 7855	09 03 232 6855	09 03 232 2855
Female connector with solder pins 4.5 mm	96		09 03 296 7825	09 03 296 6825	09 03 296 2825
	64		09 03 264 7825	09 03 264 6825	09 03 264 2825
	32		09 03 232 7825	09 03 232 6825	09 03 232 2825
	32		09 03 232 7835	09 03 232 6835	09 03 232 2835
Female connector with kinked solder pins ¹⁾ 4.5 mm	96		09 03 296 7845	09 03 296 6845	09 03 296 2845
	64		09 03 264 7845	09 03 264 6845	09 03 264 2845
	32		09 03 232 7845	09 03 232 6845	09 03 232 2845
Female connector with wrap posts 13 mm	96			09 03 296 6821	
	96			09 03 296 6878 ²⁾	
	64			09 03 264 6821	
	64			09 03 264 6878 ²⁾	
Female connector with solder lugs a + c 5.2 mm b 7.7 mm	96			09 03 296 6823	
	64			09 03 264 6823	
Female connector with press-in pins			Part Nos. and variants see chapter 04		

¹⁾ Kinked pins for fixing the connector onto the pcb see chapter 00
²⁾ Wrap posts for interfacing, selectively gold-plated (performance level 3)
 Other contact arrangements on request

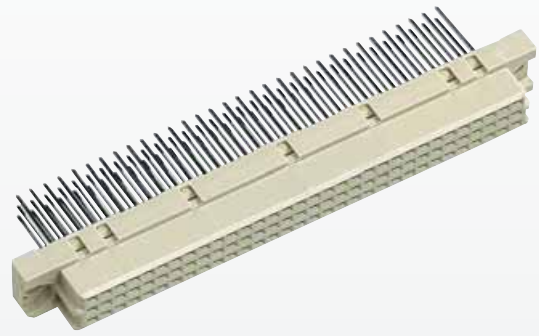


Types
signal to 2 A

Identification



Female connectors
type C
DIN 41 612

Drawing

Dimensions in mm

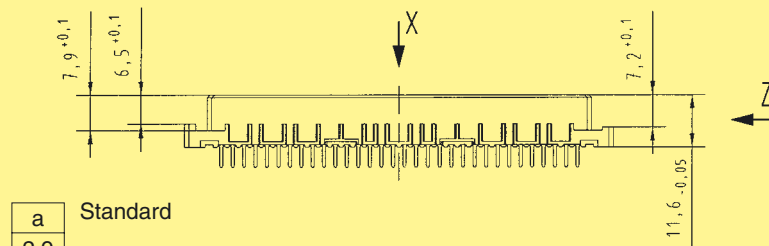

a	Standard
2.9	Solder pins
4.5	Wrap posts

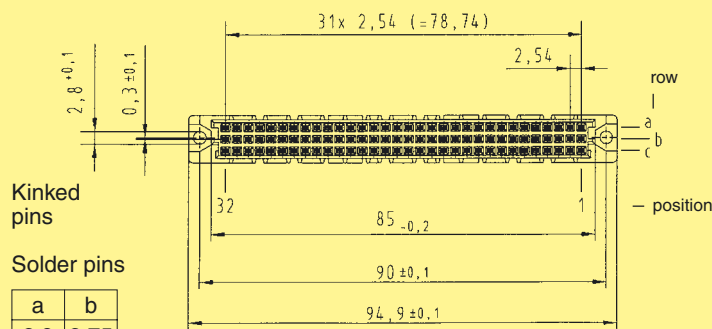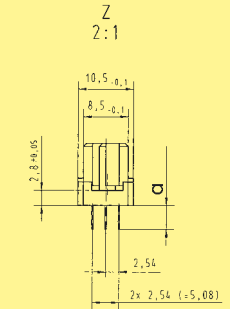


Kinked pins


a	b
2.9	2.75
4.5	4.35

Solder pins


b \triangleq Length of kinked pins

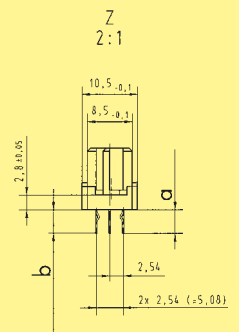

Panel cut out

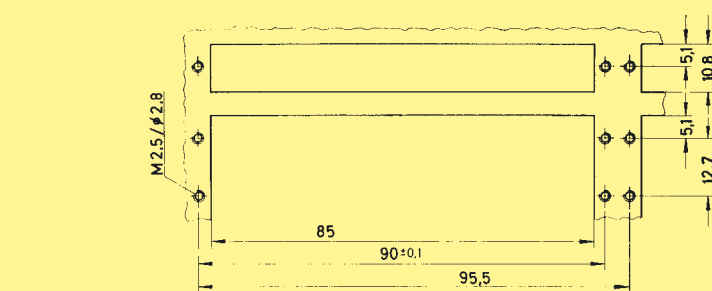


Board drillings Mounting side

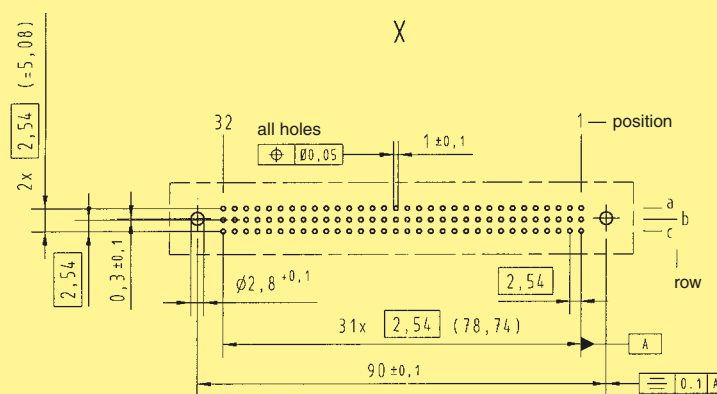

Identification strips see chapter 40

Number of contacts

64

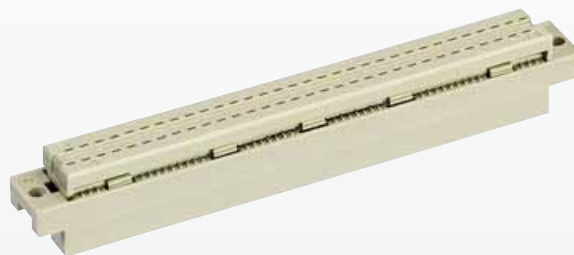

Female connectors

Types signal to 2 A


Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
----------------	--------------------	----------	---------	------------------

Female connector for insulation displacement


64

Performance level 2
09 03 264 6828


Performance level 3
09 03 264 7828

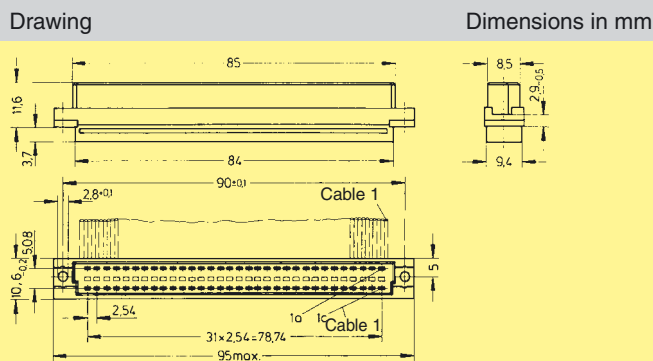

Cable 1 to contact 1 c
Contact arrangement View from termination side




Panel cut out

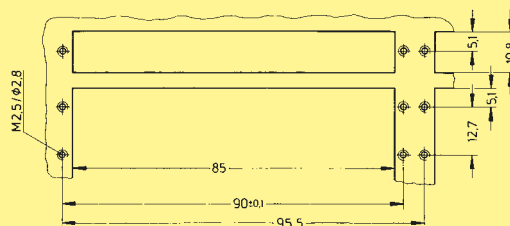

Mateable with 3 row male connector type C, no female contacts in the middle row

Flat cable
AWG 28/7


grey	50.00 m	64	09 18 064 7001
grey	150.00 m	64	09 18 064 7004
colour coded	30.48 m	64	09 18 064 7005
twisted pair ¹⁾	30.48 m	64	09 18 064 7006

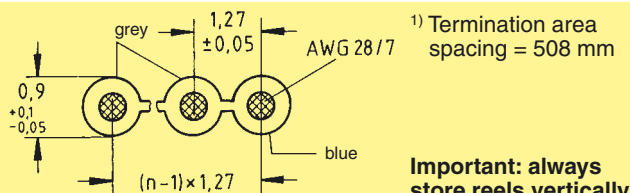

Wire (tinned) Cu
Gauge AWG 28/7 0.089 mm²
Insulation material as per UL 2651 PVC

Round flat cable²⁾

with screening	30 m	64	09 18 064 7007
	150 m	64	09 18 064 7010
without screening	30 m	64	09 18 064 7008
	150 m	64	09 18 064 7011

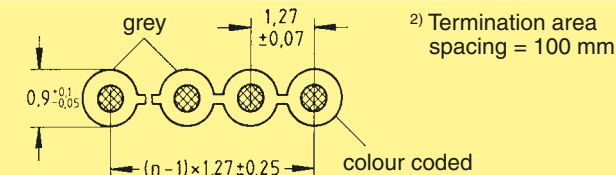

Bench press
Base plate

09 99 000 0114
09 99 000 0150

Flat cable cutter

09 99 000 0116

Spare parts
Blade
Cutting plate

09 99 000 0179
09 99 000 0180





Types
signal to 2 A

Complicated shapes are injected with utmost precision.

Integrated handling robots guarantee that new injected parts are not damaged.




Pin shroud



Number of contacts

96

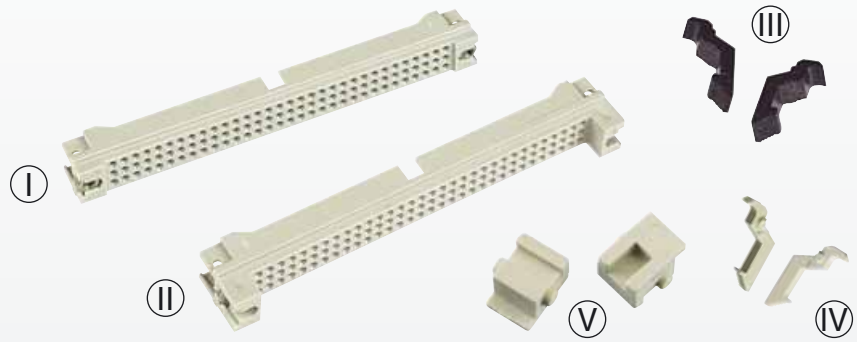


Pin shrouds/Locking levers for 0.6 x 0.6 mm wrap posts

Identification	Part No.	Drawing	Dimensions in mm
<p>Pin shroud</p> <p>I for 13 mm wrap posts</p> <p>II for 17 mm wrap posts</p> <p>III Locking lever for female connector type C*</p>	<p>09 03 000 9912</p> <p>09 03 000 9915</p> <p>09 03 000 9914</p>	<p>for 13 mm wrap posts</p> <p>for 17 mm wrap posts</p>	<p>M 2.5 DIN EN ISO 4036</p> <p>M 2.5 DIN EN ISO 4036</p>
<p>Pin shroud</p> <p>I for 13 mm wrap posts</p> <p>II for 17 mm wrap posts</p> <p>IV Locking lever for female connector type R*</p> <p>V Fixing brackets for shell housing C*</p>	<p>09 03 000 9912</p> <p>09 03 000 9915</p> <p>09 03 000 9913</p> <p>09 03 000 9921</p>	<p>for 13 mm wrap posts</p> <p>for 17 mm wrap posts</p>	<p>M 2.5 DIN EN ISO 4036</p> <p>M 2.5 DIN EN ISO 4036</p>


Height adjustment of the pin shroud for different pcb thickness with washers is possible. The mating length can be calculated as follows:

$$\text{Mating length} = 8.4 \text{ mm} - \text{pcb thickness} - \text{washers thickness}$$

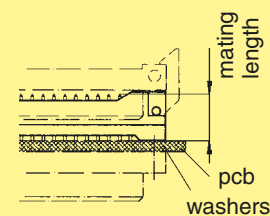


Application 1

Female connector
09 03 296 6861

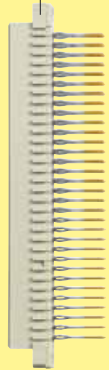

Backplane

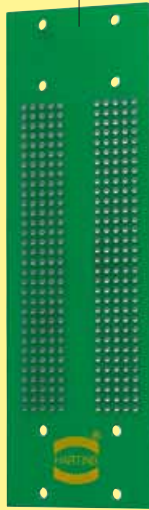


Pin shroud
09 03 000 9912



Locking lever
09 03 000 9914



Female connector
09 03 264 6828



Female connector
09 03 096 3214




Types
signal to 2 A

Application 2

Female connector
09 03 296 6862



Backplane

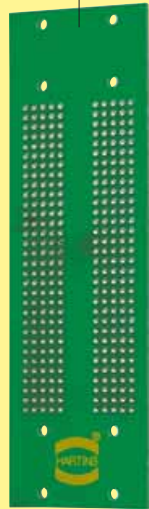

Pin shroud
09 03 000 9915



Locking lever
09 03 000 9913



Female connector
09 73 296 6801




Daughtercard

Application 3

Female connector
09 03 296 6861



Backplane

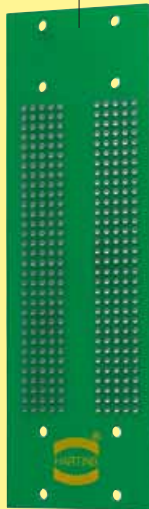

Pin shroud
09 03 000 9912



Fixing brackets
09 03 000 9921



Female connector
09 03 096 3214




Locking levers
left 09 02 000 9902
right 09 02 000 9903

Shell housing C
09 03 096 0501

Number of contacts


48, 32, 16

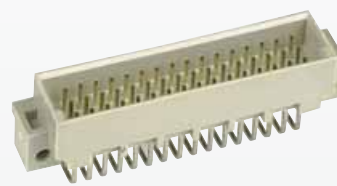

Male connectors


Identification	Number of contacts	Contact arrangement	Performance levels according to DIN 41 612. Explanation chapter 00		
			Part No.	3	2
Male connector with angled solder pins	48		09 23 148 7921	09 23 148 6921	09 23 148 2921
	32		09 23 132 7921	09 23 132 6921	09 23 132 2921
	16		09 23 116 7931	09 23 116 6931	09 23 116 2931
	46 + 2 [▲]		09 23 148 7951	09 23 148 6951	09 23 148 2951
Male connector with straight solder pins	48		09 23 148 7922	09 23 148 6922	09 23 148 2922
	32		09 23 132 7922	09 23 132 6922	09 23 132 2922

Dimensions

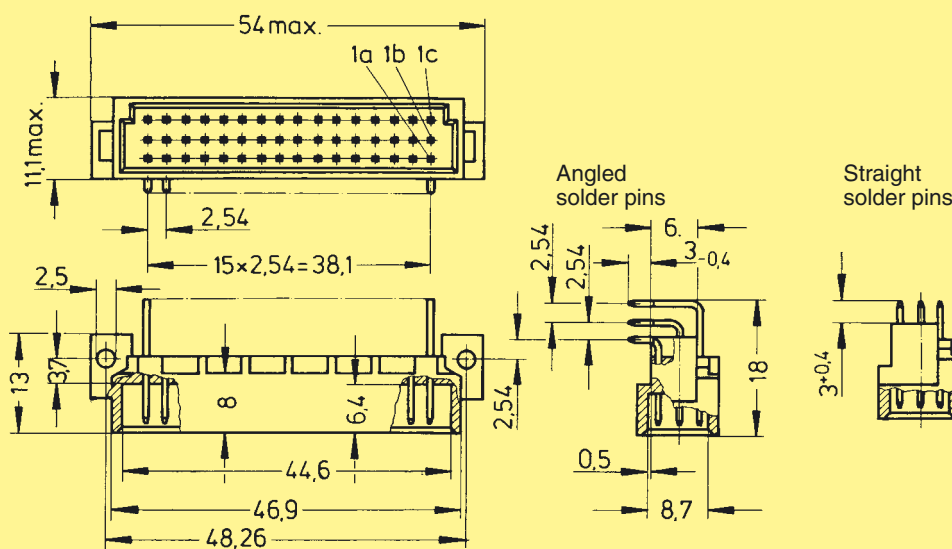

Board drillings

Mounting side

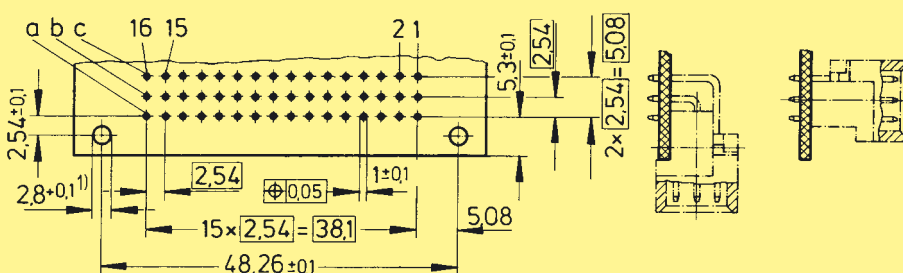


Dimensions in mm

[▲] Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a16]
Other contact arrangements on request
High temperature connector see chapter 05

Number of contacts


48

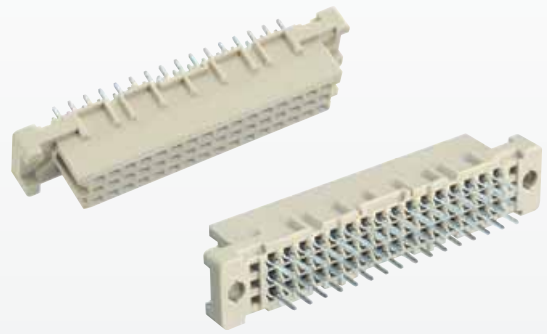


Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm	48		Performance level 3 on request	09 23 248 6824	Performance level 1 on request	
Female connector with solder pins 4.5 mm	48			09 23 248 6825		
Female connector with press-in pins	Part Nos. and variants see chapter 04					


Dimensions

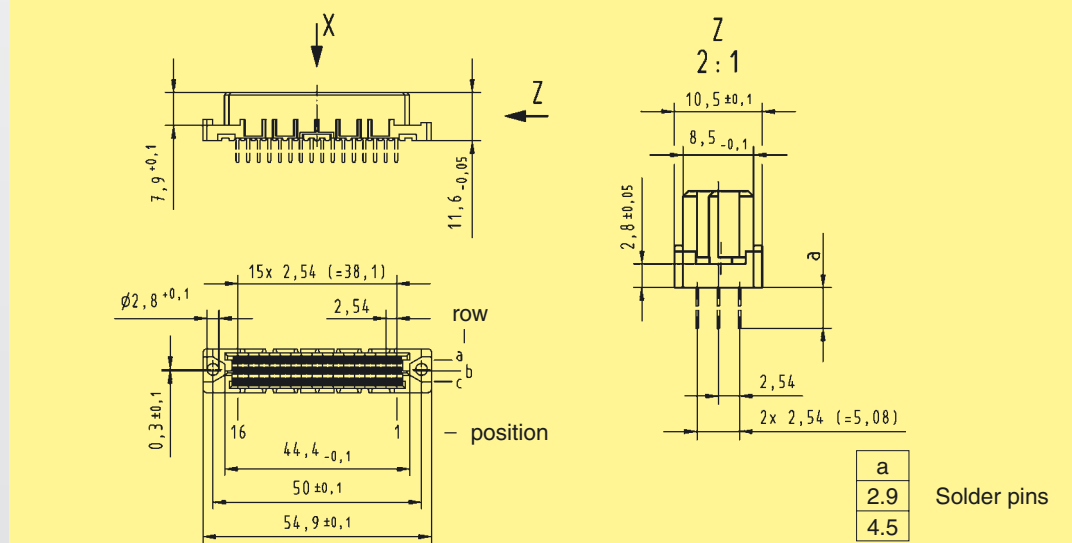

Panel cut out

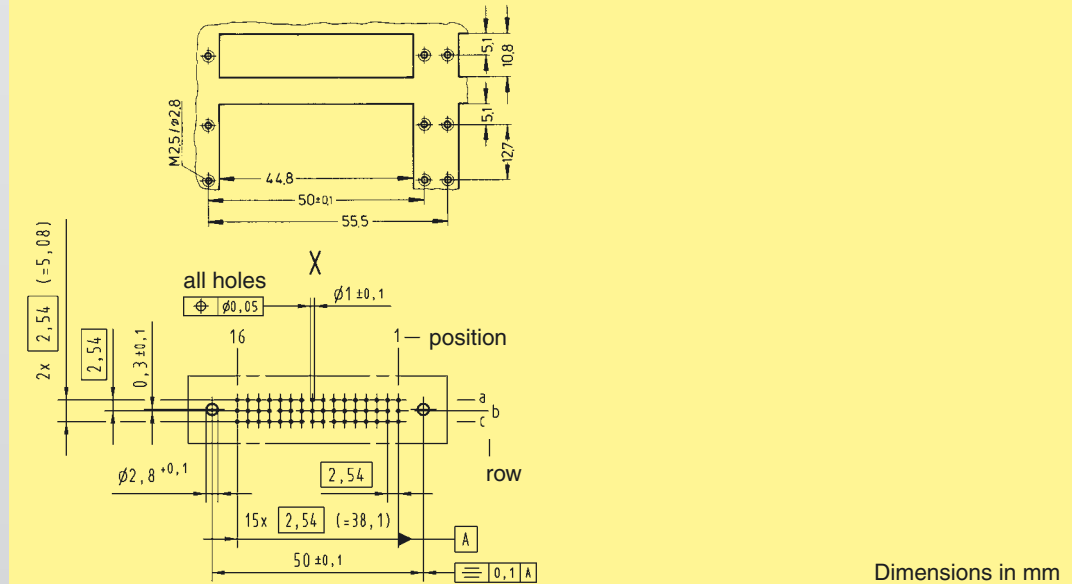

Board drillings Mounting side

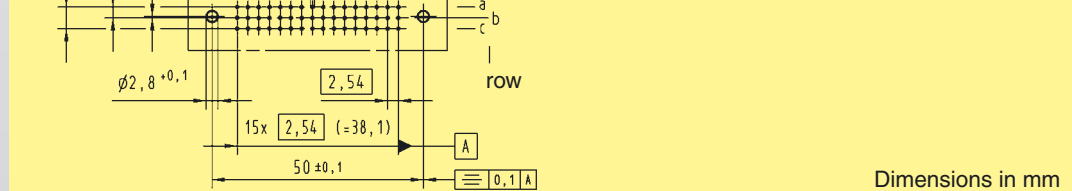

Dimensions in mm

Other contact arrangements on request

Types signal to 2 A

Number of contacts

78+2, 60+4, 42+6, 24+8




Male connectors

Types
signal to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00	
				3	2 1
Male connector with angled solder pins	78 + 2		09 03 178 7901	09 03 178 6901	09 03 178 2901
	60 + 4		09 03 160 7901	09 03 160 6901	09 03 160 2901
	42 + 6		09 03 142 7901	09 03 142 6901	09 03 142 2901
	24 + 8		09 03 124 7901	09 03 124 6901	09 03 124 2901


Dimensions

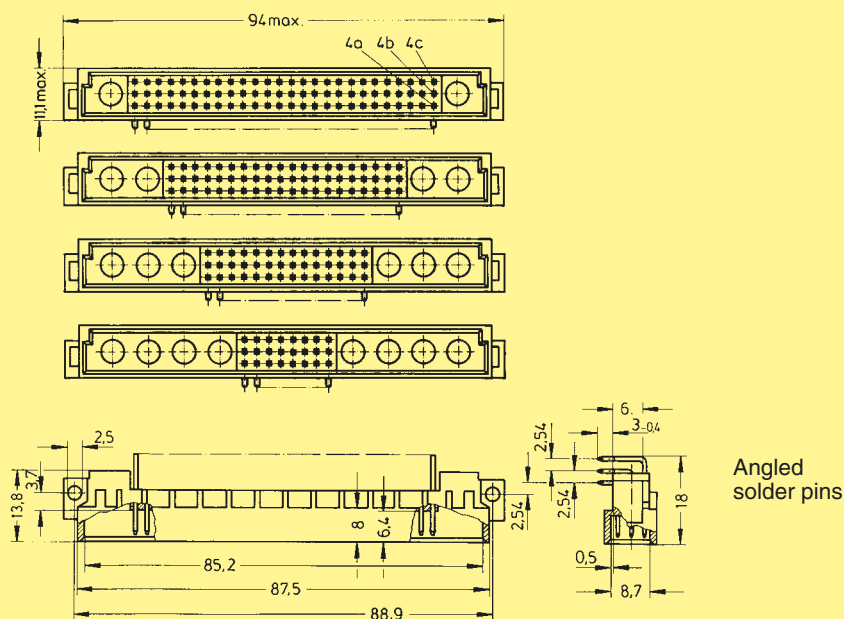

Order high current, high voltage, coaxial and fibre optic contacts separately, see pages 01.30 and 01.31

Board drillings

Mounting side

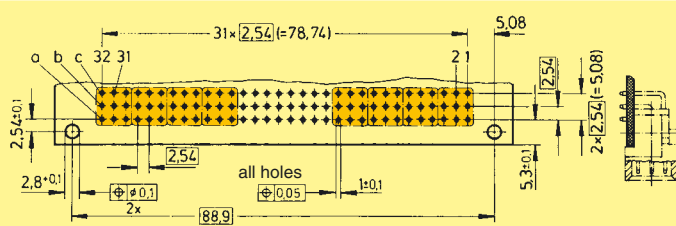


Board drillings depend on type and special contact loading

Dimensions in mm

Number of contacts

78+2, 60+4, 42+6, 24+8

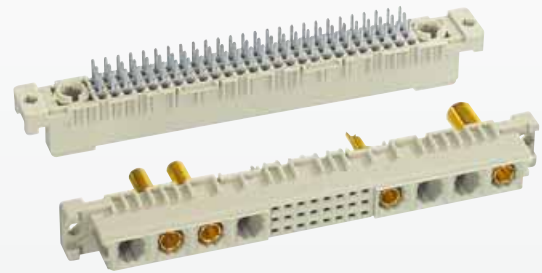


Female connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with solder pins 2.9 mm	78 + 2		Performance level 3 on request	09 03 278 6804	Performance level 1 on request	
	60 + 4			09 03 260 6804		
	42 + 6			09 03 242 6804		
	24 + 8			09 03 224 6804		
Female connector with solder pins 4.5 mm	78 + 2		Performance level 3 on request	09 03 278 6805	Performance level 1 on request	
	60 + 4			09 03 260 6805		
	42 + 6			09 03 242 6805		
	24 + 8			09 03 224 6805		

Female connector with press-in pins


Part Nos. and variants see chapter 04

Dimensions

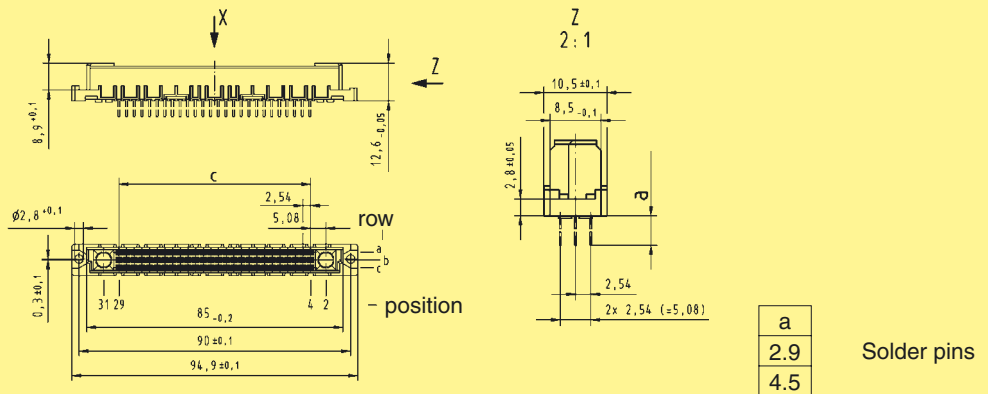


Order high current, high voltage, coaxial and fibre optic contacts separately, see pages 01.30 and 01.31


Panel cut out

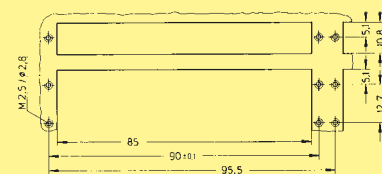

Contact arrangement View from termination side

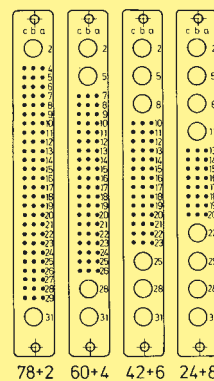

Board drillings Mounting side

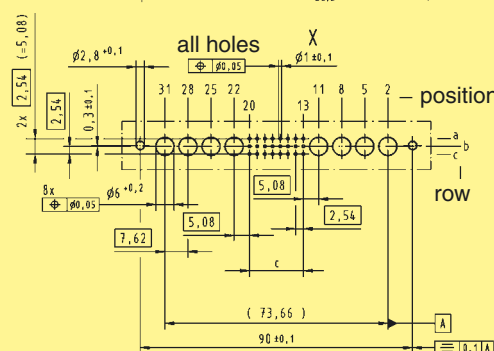

Type	c
78 + 2	25 x 2.54 = 63.5
60 + 4	19 x 2.54 = 48.26
42 + 6	13 x 2.54 = 33.02
24 + 8	7 x 2.54 = 17.78

Dimensions in mm

Other contact arrangements on request

Types signal to 2 A




High current contacts
High voltage contacts

Types
signal to 2 A

Identification Part No. Performance level 2 Drawing Dimensions in mm


High current male contacts for male connectors¹⁾

I for straight crimp termination	10 A	09 03 000 6113
	20 A	09 03 000 6114
	40 A	09 03 000 6115
Leading contact	10 A	09 03 000 6123
	20 A	09 03 000 6124
	40 A	09 03 000 6125




	ø A	ø B	wire gauge [mm ²]	AWG
10 A	1.85	2.55	1.5	16
20 A	2.80	3.70	4	12
40 A	4.40	5.60	10	8

II for straight solder termination	10 A	09 03 000 6101
	20 A	09 03 000 6102
	40 A	09 03 000 6103
Leading contact	10 A	09 03 000 6111
	20 A	09 03 000 6122
	40 A	09 03 000 6133



	ø
10 A	1.7
20 A	2.8
40 A	4.8

for angled pcb termination	40 A	09 03 000 6104
Leading contact	40 A	09 03 000 6134




	X
... 6104	17.7
... 6134	18.4

¹⁾ Solder pins for hole ø 1 ± 0.1 mm


High current female contacts for female connectors¹⁾

III for straight crimp termination	10 A	09 03 000 6213
	20 A	09 03 000 6214
	40 A	09 03 000 6215




	ø A	ø B	wire gauge [mm ²]	AWG
10 A	1.85	2.55	1.5	16
20 A	2.80	3.70	4	12
40 A	4.40	5.60	10	8

IV for straight solder termination	10 A	09 03 000 6201
	20 A	09 03 000 6202
	40 A	09 03 000 6203




	ø
10 A	1.7
20 A	2.8
40 A	4.8

V for press-in termination for type M-flat	40 A	09 03 000 6250
--	------	----------------



High voltage male contact for male connectors²⁾


VI for straight solder termination	2.8 kV	09 03 000 6140
------------------------------------	--------	----------------



Wire gauge max. 0.5 mm²

High voltage female contact for female connectors²⁾


VII for straight solder termination	2.8 kV	09 03 000 6240
-------------------------------------	--------	----------------



Wire gauge max. 0.5 mm²

Crimping tool for high current contacts	09 99 000 0196
---	----------------

¹⁾ Contact resistance max. 1.5 mΩ
²⁾ Contact resistance internal wire max. 3 mΩ

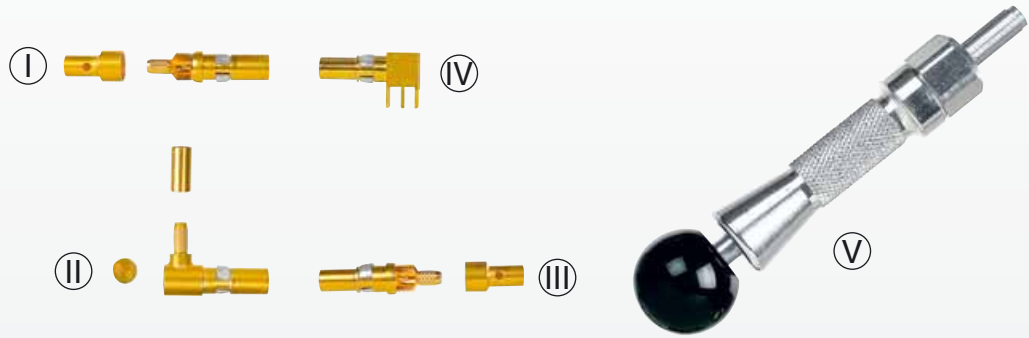

Coaxial contacts

Identification	Part No. Performance level 2	Drawing	Dimensions in mm
Male coaxial contacts for female connectors (I) for straight solder and/or crimp termination (II) for angled solder and/or crimp termination	09 03 000 6160 09 03 000 6181* 09 03 000 6161		Assembly instruction for contacts (I) and (III) for contacts (II) Mound-insulator, solder, cap, press together
Female coaxial contacts for male connectors (III) for straight solder and/or crimp termination (IV) angled for pcb termination	without knurled area 09 03 000 6260 09 03 000 6281* with knurled area 09 03 000 6274 09 03 000 6262 09 03 000 6269*	with/without knurled area 	
Crimping tool for coaxial contacts	09 99 000 0194		
Removal tool incl. removal jacket (V) for contact replacement	09 99 000 0174		
Replacement removal jacket	09 99 000 0243		
Electrical characteristics of 50 Ω coaxial contacts and wires			


Impedance	50 Ω
Max. working frequency	2 up to 10 GHz
VSWR-value	1.07 + 0.02 f [GHz]
Proof voltage	750 V / 50 Hz
Working voltage	250 V / 50 Hz
Insulation resistance	≥ 1 GΩ
Contact resistance	– Center contact – Outer contact
	10 mΩ 3 mΩ
Contact current max.	1.5 A
Admissible power (depends on: frequency, application, VSWR, environmental characteristics)	Data on request
75 Ohm versions	Data on request

Cable group 2 flexible wires	Shell ø	Screening ø	Dielectric ø	Internal wire ø	Hexagonal crimp Spanner width
RG 174 A/U	2.5	2.0	1.5	0.48	3.25
RG 188 A/U	2.6	2.0	1.5	0.54	3.25
RG 316 U	2.5	2.0	1.5	0.54	3.25

* Coaxial contact 75 Ω
Fibre optic contacts on request

Number of contacts

78+2, 60+4,
42+6, 24+8

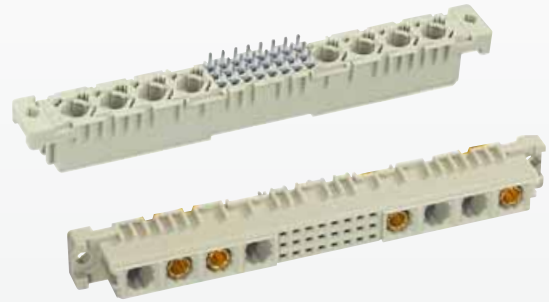

Female connectors


Types signal to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00
			3	2 1
Female connector with solder pins 2.9 mm	78 + 2 60 + 4 42 + 6 24 + 8		Performance level 3 on request	09 03 278 6864 09 03 260 6864 09 03 242 6864 09 03 224 6864
Female connector with solder pins 4.5 mm	78 + 2 60 + 4 42 + 6 24 + 8			09 03 278 6865 09 03 260 6865 09 03 242 6865 09 03 224 6865


Female connector with press-in pins

Part Nos. and variants see chapter 04

Dimensions

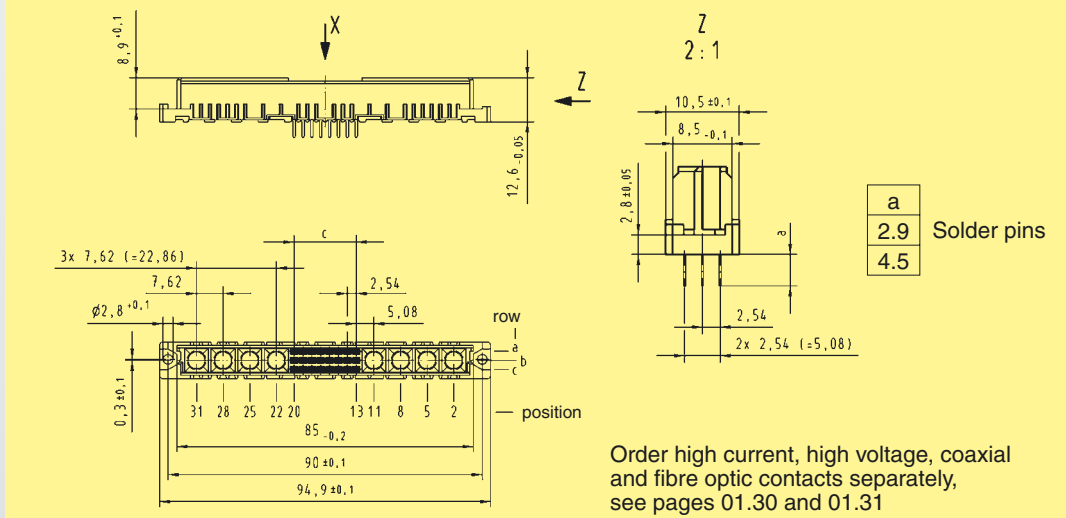


Panel cut out

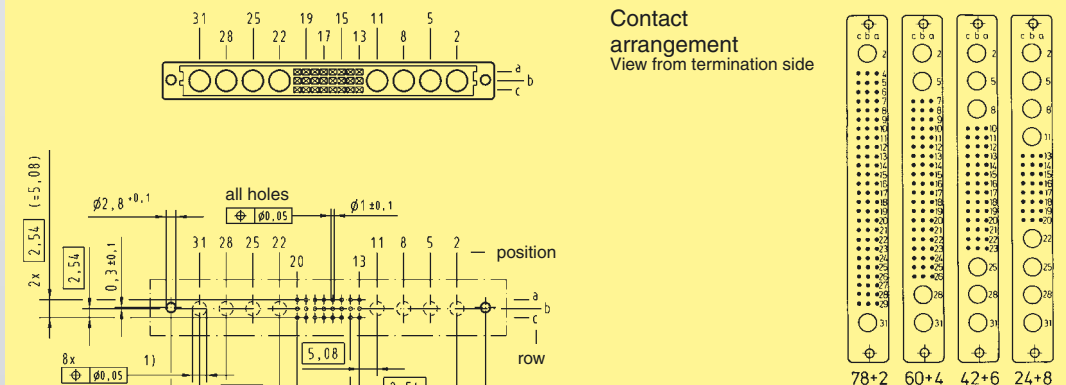

Board drillings
Mounting side

Contact arrangement
View from termination side

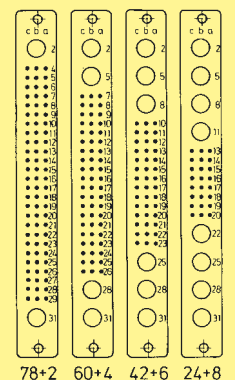

Type	c
78 + 2	25 x 2.54 = 63.5
60 + 4	19 x 2.54 = 48.26
42 + 6	13 x 2.54 = 33.02
24 + 8	7 x 2.54 = 17.78


Dimensions in mm



Types
signal to 2 A

Number of contacts

96, 64, 32

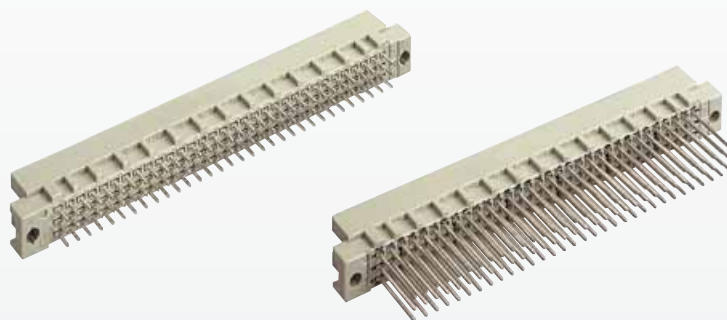

Male connectors


Types signal to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00	
				3	2 1
Male connector with solder pins 2.5 mm	96		09 73 196 7902	09 73 196 6902	09 73 196 2902
	94 + 2 [▲]		09 73 196 7952	09 73 196 6952	09 73 196 2952
	64		09 73 164 7902	09 73 164 6902	09 73 164 2902
Male connector with solder pins 4.0 mm	96		09 73 196 7903	09 73 196 6903	09 73 196 2903
	94 + 2 [▲]		09 73 196 7953	09 73 196 6953	09 73 196 2953
	64		09 73 164 7903	09 73 164 6903	09 73 164 2903
Male connector with wrap posts 13 mm	96		09 73 196 7907	09 73 196 6907	09 73 196 2907
	94 + 2 [▲]		09 73 196 7957	09 73 196 6957	09 73 196 2957
	64		09 73 164 7907	09 73 164 6907	09 73 164 2907
Male connector with wrap posts 13 mm	32		09 73 132 7907	09 73 132 6907	09 73 132 2907

Male connector with press-in pins

Part Nos. and variants see chapter 04

Dimensions

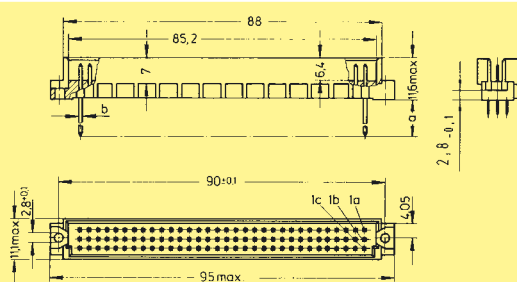


a	b
2.5	∅ 0.7
4	

Solder pins


a	b
13	□ 0.6

Wrap posts

Panel cut out

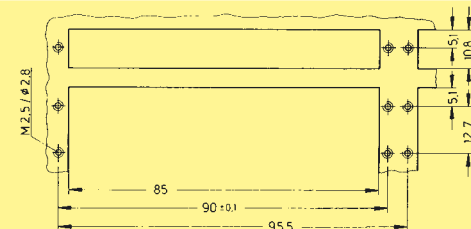


Contact arrangement View from termination side

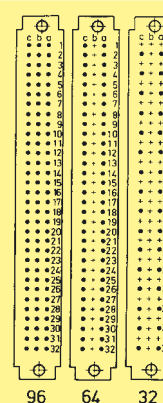

Board drillings

Mounting side

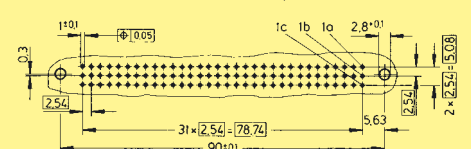


Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
Other contact arrangements as well with lagging pins on request

Number of contacts


96, 64, 32

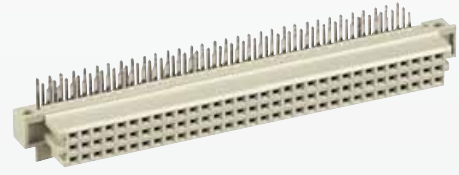

Female connectors


Identification	Number of contacts	Contact arrangement	Part No. Performance levels according to DIN 41 612. Explanation chapter 00		
			3	2	1
Female connector with angled solder pins	96		09 73 296 7801	09 73 296 6801	09 73 296 2801
	64		09 73 264 7801	09 73 264 6801	09 73 264 2801
	32		09 73 232 7801	09 73 232 6801	09 73 232 2801
	32		09 73 232 7811	09 73 232 6811	09 73 232 2811

Dimensions

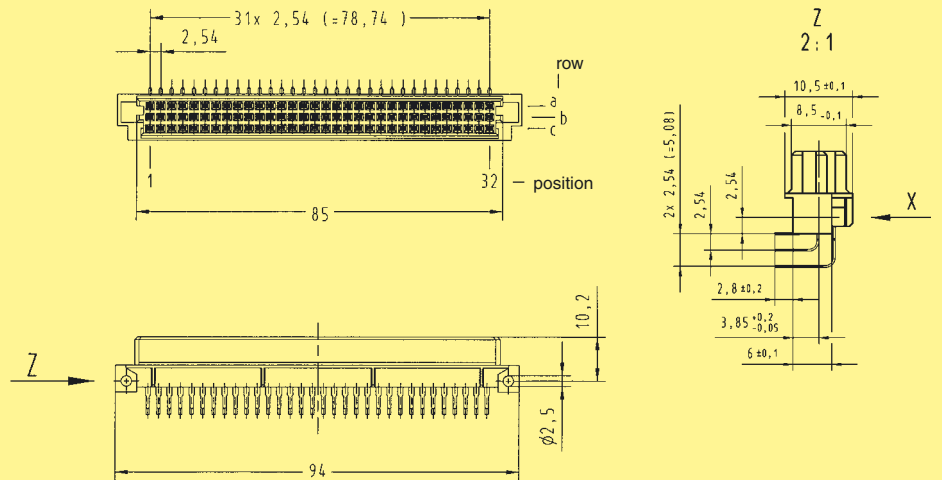

Board drillings

Mounting side

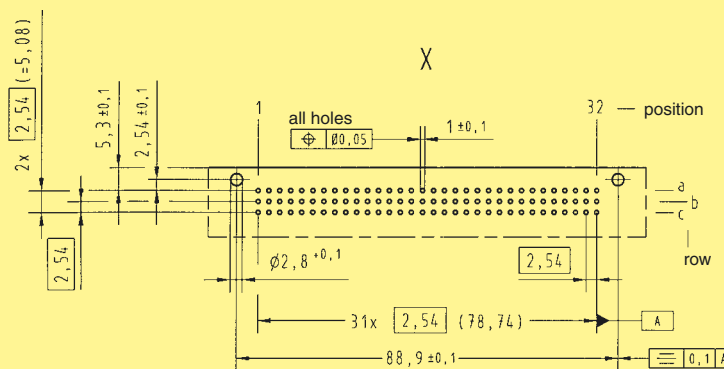

Dimensions in mm


Types signal to 2 A

DIN 41 612 · complementary to type R (HE 11)



Number of contacts

96, 64, 32

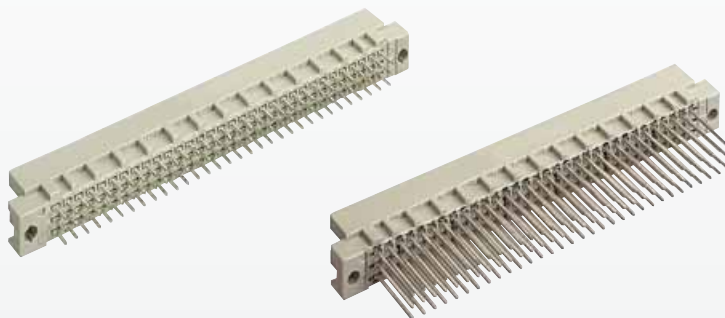


Male connectors



Types signal to 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00	
				3	2 1
Male connector with solder pins 2.5 mm	96		09 79 196 7902	09 79 196 6902	Performance level 1 on request
	64		09 79 164 7902	09 79 164 6902	
	32		09 79 132 7902	09 79 132 6902	
Male connector with solder pins 4.0 mm	96		09 79 196 7903	09 79 196 6903	
	64		09 79 164 7903	09 79 164 6903	
	32		09 79 132 7903	09 79 132 6903	
Male connector with wrap posts 13 mm	96		09 79 196 7907	09 79 196 6907	
	64		09 79 164 7907	09 79 164 6907	
	32		09 79 132 7907	09 79 132 6907	

Dimensions

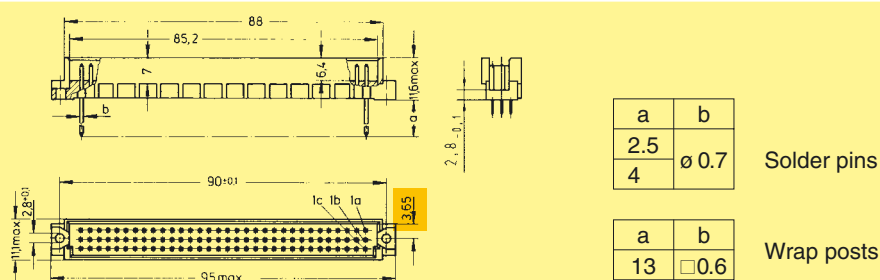


Panel cut out

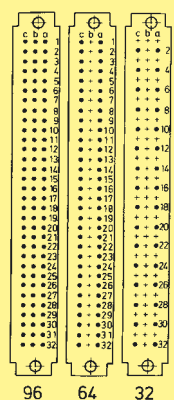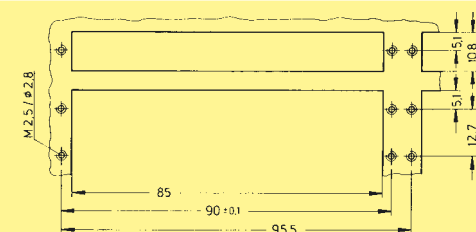

Contact arrangement
View from termination side

Board drillings Mounting side

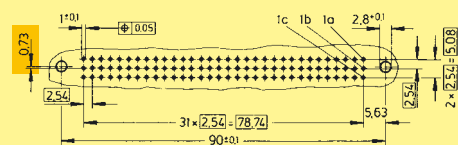

96 64 32


Dimensions in mm

Other contact arrangements on request

= deviating dimensions from standard male connectors (see page 01.34)

Number of contacts


96, 64

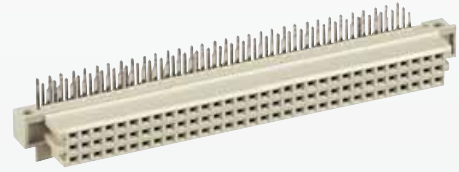

Female connectors


Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Female connector with angled solder pins	96		09 79 296 7801		09 79 296 6801	Performance level 1 on request
	64		09 79 264 7801		09 79 264 6801	

Dimensions

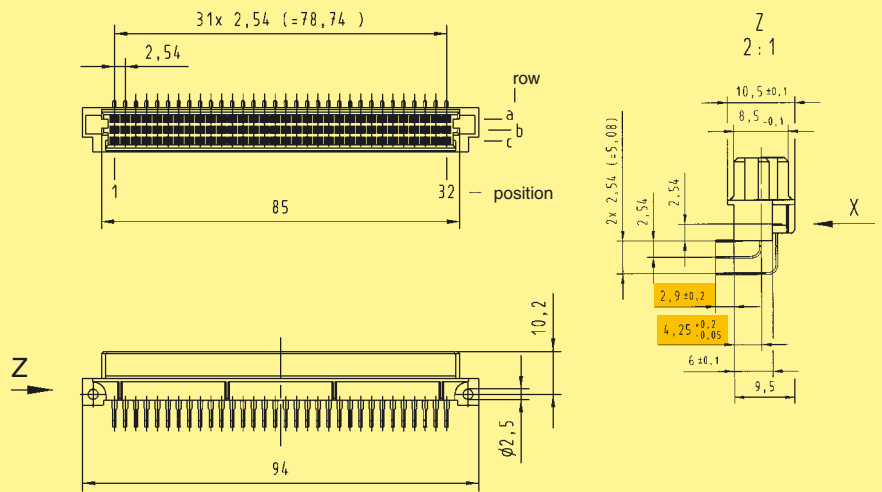

Board drillings

Mounting side

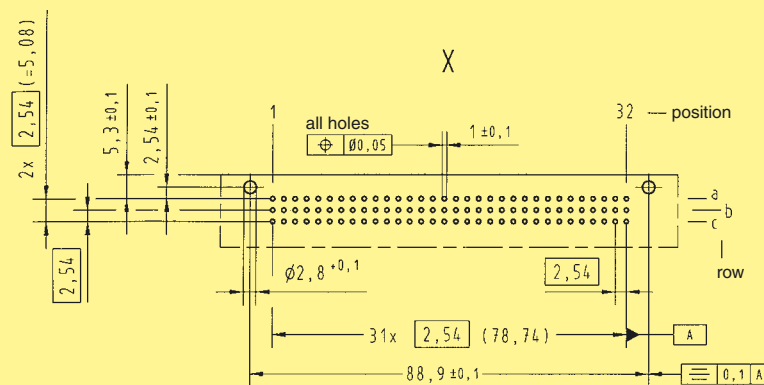


Dimensions in mm

Other contact arrangements on request

= deviating dimensions from standard female connectors (see page 01.35)

Number of contacts

64

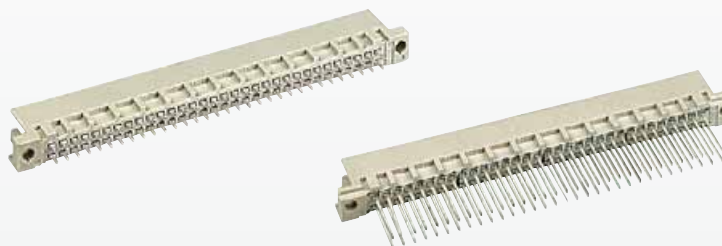


Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm	64 62 + 2 [▲]		09 72 164 7902 09 72 164 7952	09 72 164 6902 09 72 164 6952	Performance level 1 on request	
Male connector with solder pins 4.0 mm	64 62 + 2 [▲]		09 72 164 7903 09 72 164 7953	09 72 164 6903 09 72 164 6953		
Male connector with wrap posts 13 mm	64 62 + 2 [▲]		09 72 164 7907 09 72 164 7957	09 72 164 6907 09 72 164 6957		


Male connector with press-in pins

Part Nos. and variants see chapter 04

Dimensions

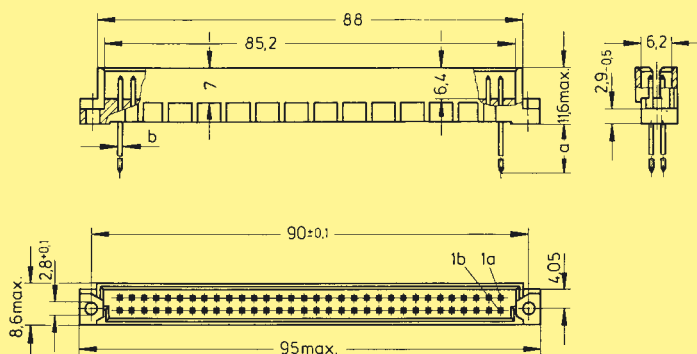


Panel cut out

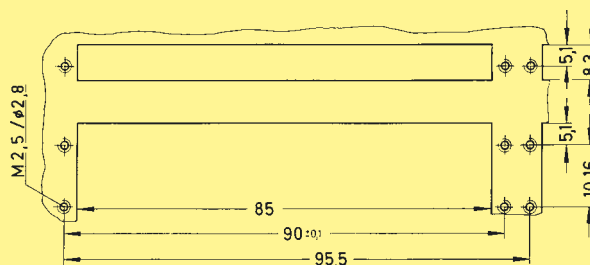

Board drillings

Mounting side

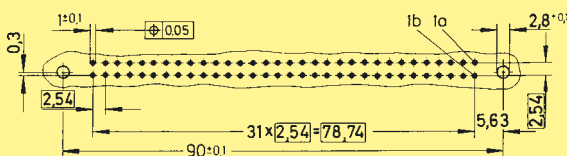


Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a32]
Other contact arrangements as well with lagging pins on request

Number of contacts

32

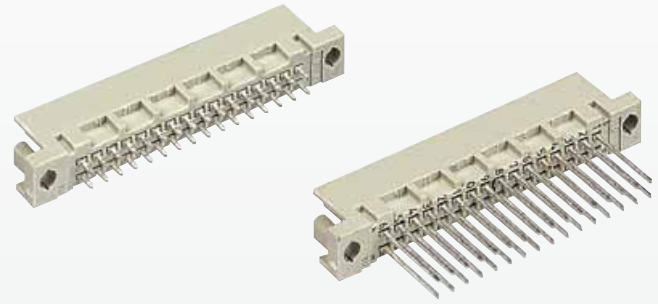


Male connectors

Identification	Number of contacts	Contact arrangement	Part No.			Performance levels according to DIN 41 612. Explanation chapter 00		
			3	2	1	3	2	1
Male connector with solder pins 2.5 mm	32 30 + 2 [▲]		09 27 132 7902 09 27 132 7952	09 27 132 6902 09 27 132 6952				
Male connector with solder pins 4.0 mm	32 30 + 2 [▲]		09 27 132 7903 09 27 132 7953	09 27 132 6903 09 27 132 6953			Performance level 1 on request	
Male connector with wrap posts 13 mm	32 30 + 2 [▲]		09 27 132 7907 09 27 132 7957	09 27 132 6907 09 27 132 6957				


Male connector with press-in pins

Part Nos. and variants see chapter 04

Dimensions

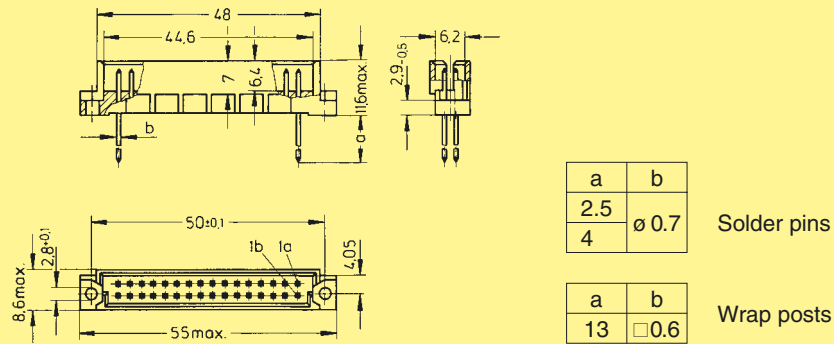


Panel cut out

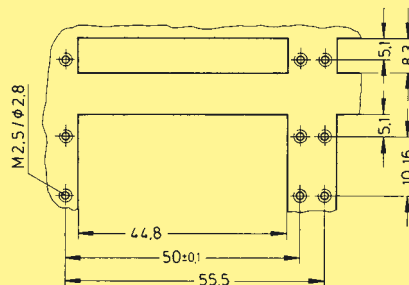

Board drillings

Mounting side

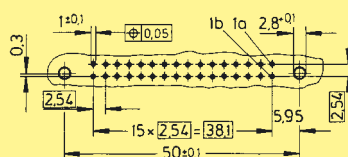


Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a16]
Other contact arrangements as well with lagging pins on request

Number of contacts

48, 32

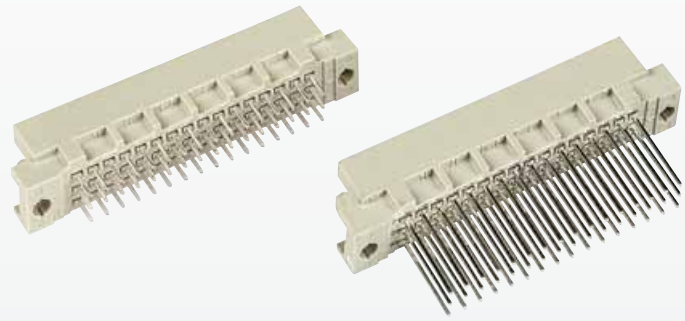


Male connectors

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00		
				3	2	1
Male connector with solder pins 2.5 mm	48		09 28 148 7902	09 28 148 6902	09 28 148 2902	
	46 + 2 [▲]		09 28 148 7952	09 28 148 6952	09 28 148 2952	
	32		09 28 132 7902	09 28 132 6902	09 28 132 2902	
Male connector with solder pins 4.0 mm	48		09 28 148 7903	09 28 148 6903	09 28 148 2903	
	46 + 2 [▲]		09 28 148 7953	09 28 148 6953	09 28 148 2953	
	32		09 28 132 7903	09 28 132 6903	09 28 132 2903	
Male connector with wrap posts 13 mm	48		09 28 148 7907	09 28 148 6907	09 28 148 2907	
	46 + 2 [▲]		09 28 148 7957	09 28 148 6957	09 28 148 2957	
	32		09 28 132 7907	09 28 132 6907	09 28 132 2907	

Male connector with press-in pins

Part Nos. and variants see chapter 04

Dimensions

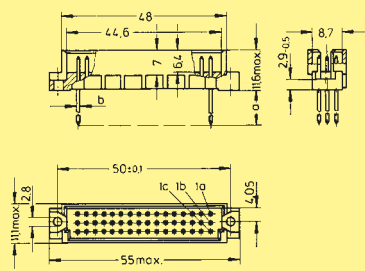


a	b
2.5	∅ 0.7
4	

Solder pins


a	b
13	□ 0.6

Wrap posts


Panel cut out

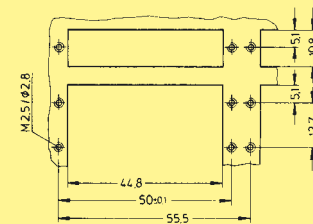

Contact arrangement
View from termination side



Board drillings
Mounting side

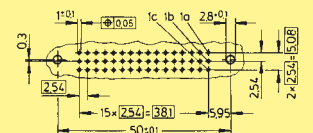

Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a1 and a16]
Other contact arrangement on request

Number of contacts

64, 48, 32



Female connectors

Identification Number of contacts Contact arrangement Part No. Performance level 2 according to DIN 41 612. Explanation chapter 00

Female connector with angled solder pins

Type Q

64



09 72 264 6801

Type 2Q


32



09 27 232 6801


Type 2R

48




09 28 248 6801

Dimensions

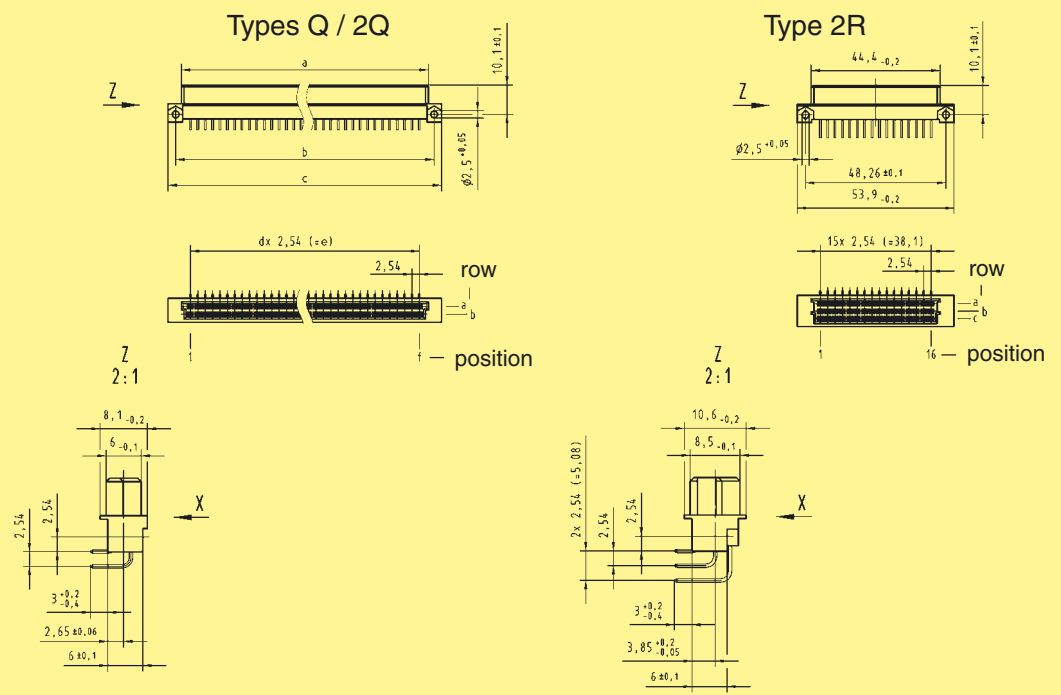

Type	a	b	c	d	e	f
Q	85.0 ^{-0.2}	88.90 ^{±0.1}	94.0 ^{-0.2}	31	78.74	32
2Q	44.4 ^{-0.2}	48.26 ^{±0.1}	53.9 ^{-0.2}	15	38.10	16



Board drillings
Mounting side

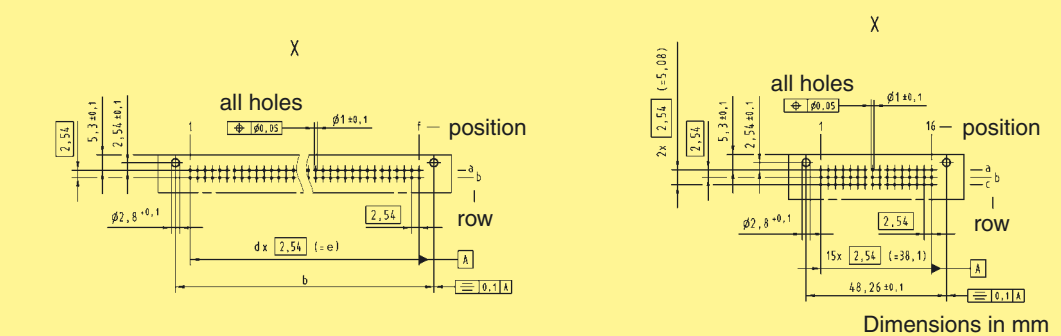

Dimensions in mm

Types signal to 2 A

Types
signal to 2 A

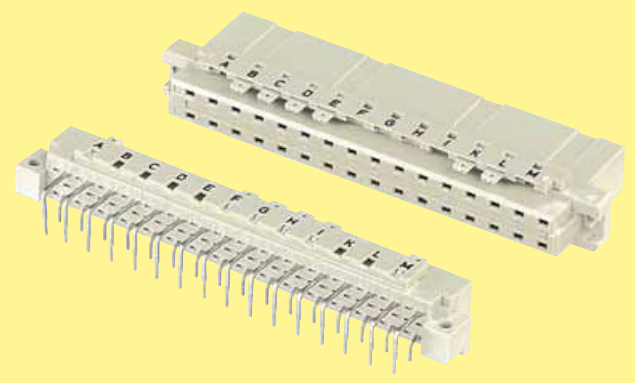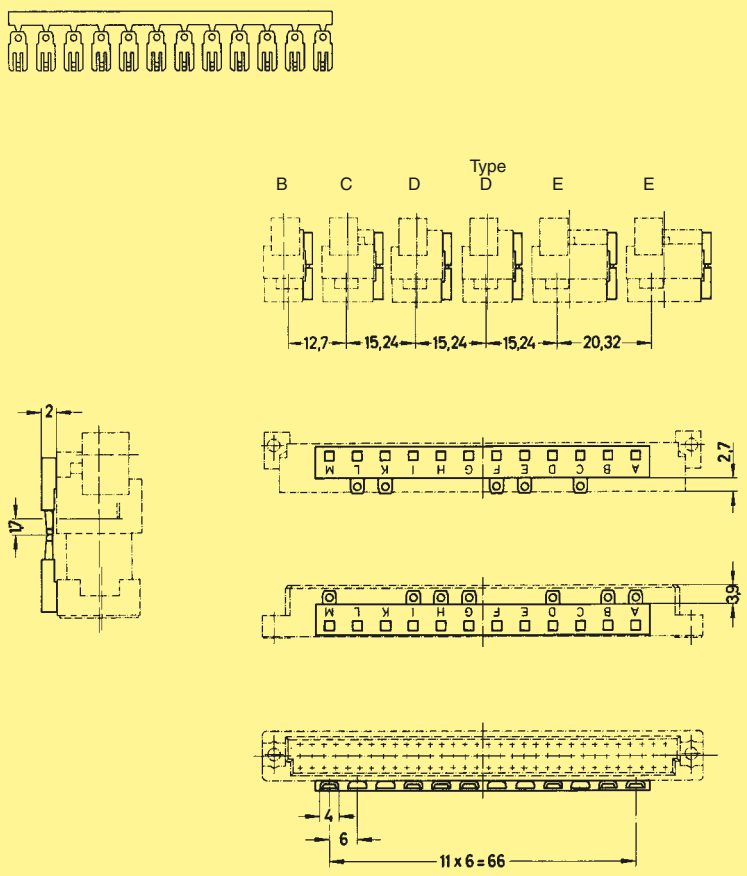Identification	Part No.	Drawing	Dimensions in mm
<p>Coding system <u>without</u> contact loss</p>	<p>Male and female connectors Type B, C, D and E</p> <p>on request</p>	<p>To avoid accidental and incorrect mating of adjacent connectors a coding system is required. This coding system is an integral part of both male and female connectors. A comb with 12 coding pins, which is supplied under a single part number, allows over 900 coding variations. The pins are to be locked into the male and female connectors.</p> <p>The connectors with the integrated coding facility are supplied for types B, C, D and E according to DIN 41 612 and are available for all variants.</p> <p>Please contact us.</p> 	
<p>Coding pins</p> <p>Mounting example</p>	<p>12 pins on a comb</p> <p>09 02 000 9928</p>	 <p>Technical drawing showing the coding system components and dimensions:</p> <ul style="list-style-type: none"> Top view of 12 pins on a comb. Side view of the comb with dimensions: 12,7, 15,24, 15,24, 15,24, 20,32. Cross-sectional view of the comb with dimensions: 2, 15, 27, 39. Bottom view of the comb with dimensions: 4, 6, 11 x 6 = 66. 	