
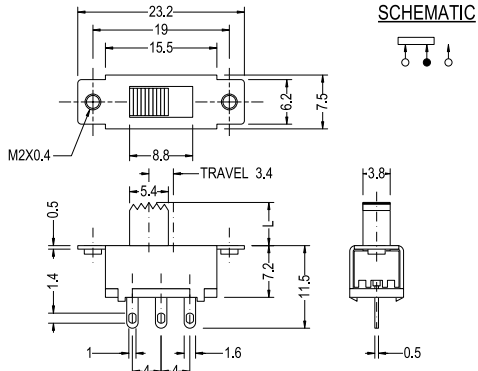

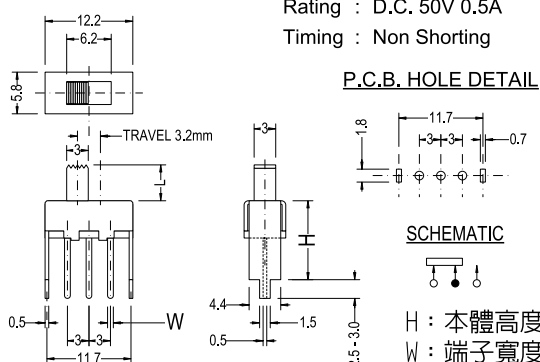

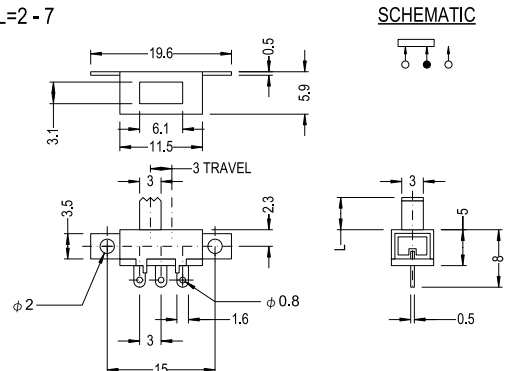

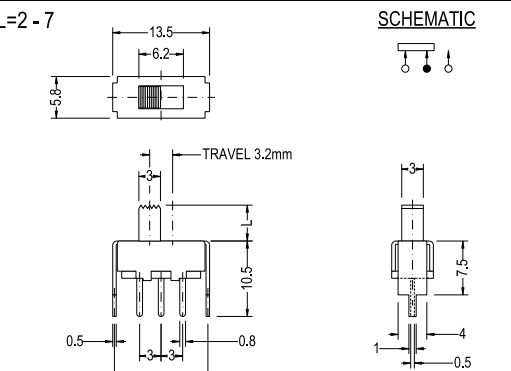

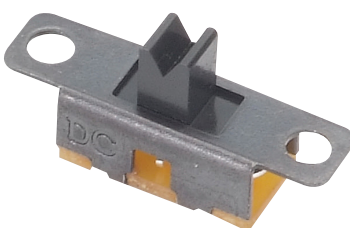
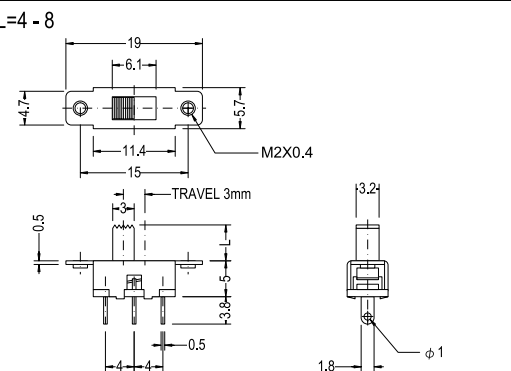


SLIDE SWITCH

SS12F29 		SPECIFICATION Circuit : ON-ON (1P2T) Rating : D.C. 50V 0.5A Contact R.[max] : D.C. 5V 1A 30mΩ Insulation R.[min] : D.C. 500V 100MΩ Withstand VOL. : A.C. 500V 1minute Operating force : 300±100g Timing : Non Shorting Life cycle[max] : 10,000 CYCLES																								
SS12F41 ON-ON(1P2T) 	Rating : D.C. 50V 0.5A Timing : Non Shorting  H : 本體高度 W : 端子寬度	開關型號 高度 (H) 端子 (W) <table><tr><td>SS-12F24</td><td>14</td><td>1.3</td></tr><tr><td>SS-12F41</td><td>11</td><td>0.8</td></tr><tr><td>SS-12F42</td><td>14</td><td>0.8</td></tr><tr><td>SS-12F44</td><td>6</td><td>1.2</td></tr><tr><td>SS-12F46</td><td>6</td><td>0.8</td></tr><tr><td>SS-12F49</td><td>9</td><td>0.8</td></tr><tr><td>SS-12F65</td><td>5.5</td><td>0.8</td></tr><tr><td>SS-12F68</td><td>8</td><td>0.8</td></tr></table>	SS-12F24	14	1.3	SS-12F41	11	0.8	SS-12F42	14	0.8	SS-12F44	6	1.2	SS-12F46	6	0.8	SS-12F49	9	0.8	SS-12F65	5.5	0.8	SS-12F68	8	0.8
SS-12F24	14	1.3																								
SS-12F41	11	0.8																								
SS-12F42	14	0.8																								
SS-12F44	6	1.2																								
SS-12F46	6	0.8																								
SS-12F49	9	0.8																								
SS-12F65	5.5	0.8																								
SS-12F68	8	0.8																								
SS12F55 	L=2 - 7 	SPECIFICATION Circuit : ON-ON (1P2T) Rating : D.C. 50V 0.5A Contact R.[max] : D.C. 5V 1A 30mΩ Insulation R.[min] : D.C. 500V 100MΩ Withstand VOL. : A.C. 500V 1minute Operating force : 300±100g Timing : Non Shorting Life cycle[max] : 10,000 CYCLES																								
SS12F58  (SS-002A)	L=2 - 7 	SPECIFICATION Circuit : ON-ON(1P2T) Rating : D.C. 50V 0.5A Timing : Non Shorting P.C.B. HOLE DETAIL 																								
SS12F77  (SS-001A)	L=4 - 8 	SPECIFICATION Circuit : ON-ON (1P2T) Rating : D.C. 50V 0.5A Contact R.[max] : D.C. 5V 1A 30mΩ Insulation R.[min] : D.C. 500V 100MΩ Withstand VOL. : A.C. 500V 1minute Operating force : 300±100g Timing : Non Shorting Life cycle[max] : 10,000 CYCLES																								