


Surface Mount High IP3 Monolithic Amplifier

Broadband, 50 & 75 ohms, 5 to 1000 MHz

HELA-10+ HELA-10



CASE STYLE: CM624

Features

- excellent flatness, ± 0.4 dB typ.
- very high IP3, 49 dBm typ. at 150 MHz & 45 dBm typ. at 800 MHz
- very high IP2, 88 dBm typ.
- low noise figure, 3.5 dB typ.

Applications

- cellular
- catv
- instrumentation

Model	Price	Qty.
HELA-10+	\$15.95	(1-24)
HELA-10	\$15.95	(1-24)
HELA Kit (see table below)	\$19.95	(1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Electrical Specifications at 25°C

KIT ¹ NO.	FREQ. (MHz)		OHMS	GAIN* (dB)				MAXIMUM POWER (dBm)			DYNAMIC RANGE		VSWR Typ. (:1)		DC POWER		THERMAL RESISTANCE***
	f_L	f_U		Min.	Typ.	Max.	Typ. Flatness	Output (1 dB Compr.) Typ.	Min.	Input† (no damage)	NF dB Typ.	IP3 dBm Typ.	In	Out	Volt (V) Nom.	Current (mA) Max.	θ_{jc} °C/W
HELA-10A(+)	50	1000	75	9.5	12	13	± 0.4	30	26	20	3.5	47	1.22	1.22	12	525	6
HELA-10B(+)	50	1000	50	9.5	12	13	± 0.4	30	26	20	3.5	47	1.22**	1.22**	12	525	6
HELA-10C(+)	5	450	75	9.3	11.4	12.5	± 0.4	30	26	20	3.5	48	1.3	1.22	12	525	6
HELA-10D(+)	8	300	50	9.3	11.0	12.5	± 0.4	30	26	20	3.5	48	1.2	1.2	12	525	6

¹ Kit consists of HELA-10 plus transformers, see table below.

* Includes transformer losses at input & output.

† Open load is not recommended, potentially can cause damage. With no load, derate max. input power by 20 dB

** For 75 ohm. For 50 ohm, VSWR increases from 1.2:1 at 1 GHz to 2.0:1 at 50MHz.


*** Thermal resistance is from junction to heat slug. (mounting paddle)

Pin Connections

RF IN 1,2	3,6
RF OUT 1,2	14, 11
DC	10,15
GROUND	1,4,5,8,9,12,13,16
NO CONNECTION	2,7

Application Schematic Diagram

(see table below for values C1 to C6, L1&L2)

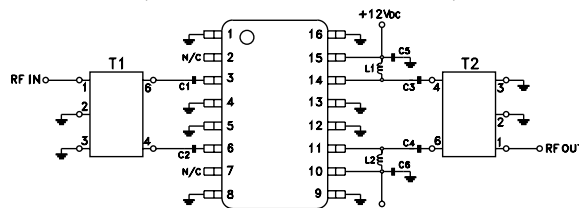


APPLICATION CIRCUIT	T1	T2	C1 TO C6	L1, L2	PCB LAYOUT	EVALUATION BOARD
A	ADTL1-18-75	ADTL1-18-75	0.01 μ F	0.75 μ H	B14-TB-30	TB-16
B	ADTL1-12	ADTL1-12	0.01 μ F	0.75 μ H	B14-TB-17	TB-17
C	ADT1-1WT	ADT1-4-75	0.039 μ F	3.3 μ H	B14-TB-16	TB-30
D	ADT1.5-1	ADT1.5-1	0.039 μ F	3.3 μ H	B14-TB-17	TB-45

Maximum Ratings

Heat Slug Temperature	110°C max.
Storage Temperature	-40°C to +125°C
DC Voltage	+13V
DC Power	7.15W

Outline Drawing

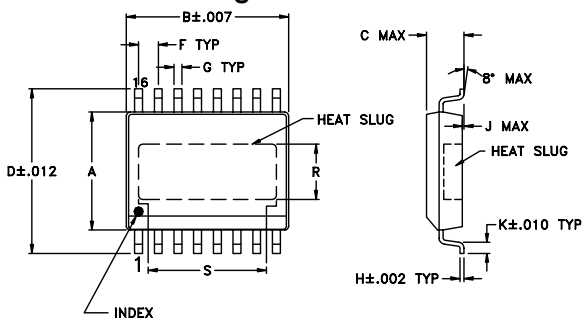


TOLERANCES
2 PLACE DECIMALS ± 0.01
3 PLACE DECIMALS ± 0.005
UNLESS OTHERWISE SPECIFIED

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
.295	.405	.098	.406	.36	.05	.016	.008	.004	.032	—	.102	.028	.46	.13	.13	.34	.17	grams
7.49	10.29	2.49	10.31	9.14	1.27	0.41	0.20	0.10	0.81	—	2.59	0.71	11.63	3.30	3.30	8.64	4.32	0.67

Demo Board MCL P/N: TB-16,-17,-30,-45 Suggested PCB Layout (PL-076)

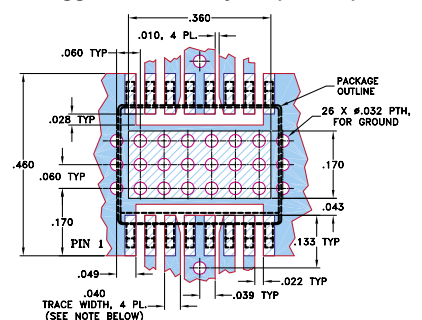

NOTE: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS 0.057" $\pm$.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Assembly Guideline

Reflow solder the slug to the ground plane; PC board layouts for 75 ohm (B14-TB-16), (B14-TB-30), and for 50 ohm (B14-TB-17) are available upon request. Please contact Applications Department or consult our web site.

Mini-Circuits®

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. L
M102713
HELA-10
A ED-6636T
B ED-6636T
C ED-7157/1
D ED-7491/2
060118