

Keyword:
XOL – Extended Operating Life

Model: SL-886

Performance Data **Size 1/6D**
 (Typical values for batteries stored at 25 °C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.7 Ah
Nominal current	0.5 mA
Max. continuous discharge current	10 mA
Max. pulse current capability	20 mA
Anode surface area	7.5 cm ²
Lithium content	0.5 g
Weight	21 g
Volume	8.2 cm ³
Temperature range	-55...+85 °C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety


Typical Discharge Curves at +25°C

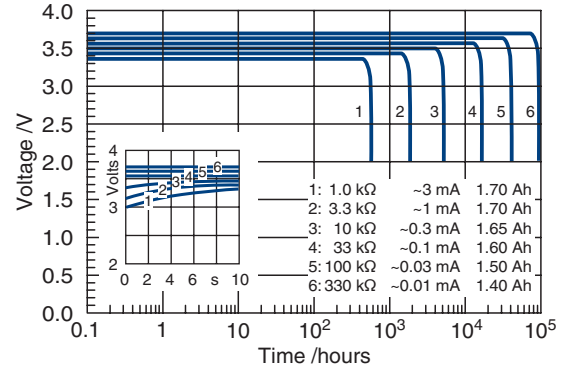


Available Capacity

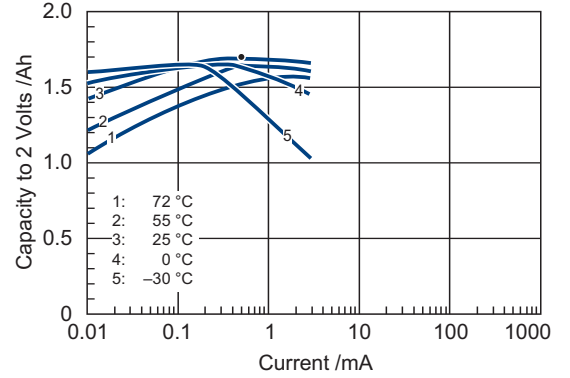

Operating Voltage

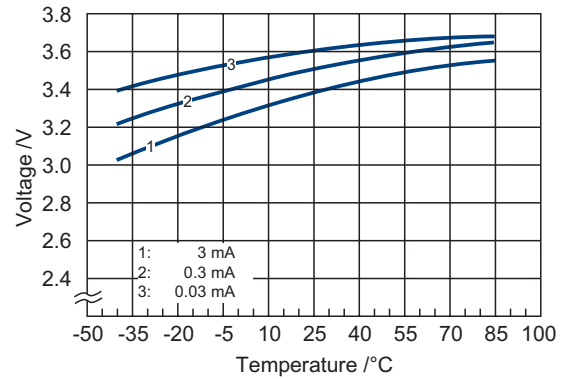

SL-886

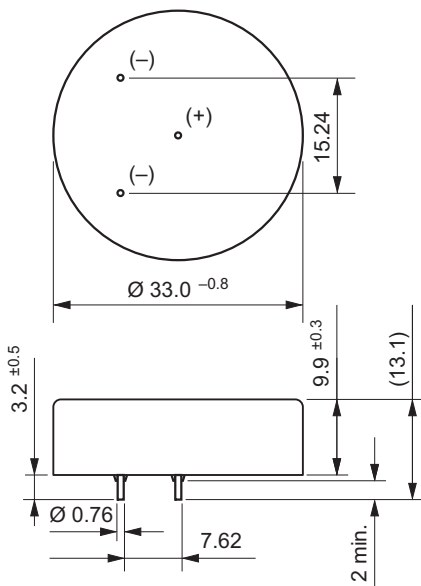

Available Terminations

SL-886 Pins

Catalogue No.

11 1 18864 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.