



Features

- ◆ Ultra-wide 4:1 Input Range
- ◆ SIP-9 Package
- ◆ Full SMD Design
- ◆ Temperature Range -40 to +75°C
- ◆ High Efficiency
- ◆ Excellent Load and Line Regulation
- ◆ Indefinite Short-circuit Protection
- ◆ I/O-Isolation 1000VDC
- ◆ Built-in Filter meets EN 55022, Class A and FCC, Level A
- ◆ Remote On/Off Control
- ◆ Fully RoHS compliant
- ◆ 3 Year Product Warranty



The TMR-2WI series is a new family of isolated 2W dc-dc converter modules with regulated output, featuring ultra-wide 4:1 input voltage ranges of 9-36 VDC or 18-75 VDC. The product come in a ultra-compact SIP-9 plastic package. An excellent efficiency up to 84% allows -40°C to +75°C operation temperatures at full load. Further features include remote On/Off control and continuous short circuit protection. Typical applications for these ultra-compact converters are battery operated equipment and distributed power architectures in communication, instrumentation and industrial electronics, everywhere where space on the PCB is critical.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TMR 2-2410WI	9 – 36 VDC (24 VDC nominal)	3.3 VDC	500 mA	75 %
TMR 2-2411WI		5 VDC	400 mA	80 %
TMR 2-2412WI		12 VDC	165 mA	83 %
TMR 2-2413WI		15 VDC	135 mA	84 %
TMR 2-2421WI		± 5 VDC	±200 mA	77 %
TMR 2-2422WI		±12 VDC	±85 mA	81 %
TMR 2-2423WI		±15 VDC	±65 mA	83 %
TMR 2-4810WI	18 – 75 VDC (48 VDC nominal)	3.3 VDC	500 mA	75 %
TMR 2-4811WI		5 VDC	400 mA	80 %
TMR 2-4812WI		12 VDC	165 mA	83 %
TMR 2-4813WI		15 VDC	135 mA	84 %
TMR 2-4821WI		± 5 VDC	±200 mA	77 %
TMR 2-4822WI		±12 VDC	±85 mA	81 %
TMR 2-4823WI		±15 VDC	±65 mA	83 %

Input Specifications

Input current at no load (nominal input)	24 Vin models: 20 mA typ. 48 Vin models: 15 mA typ.
Input current at full load (nominal input)	24 Vin models: 110 mA typ. 48 Vin models: 55 mA typ.
Surge voltage (100 msec. max.)	24 Vin models: 50 V max. 48 Vin models: 100 V max.
Reverse voltage protection	0.5 A max.
Input Filter	capacitor type
Start up time	< 1ms (at nominal input and resistive load)

Output Specifications



Voltage set accuracy	$\pm 2 \%$
Regulation	- Input variation Vin min. to Vin max. 0.5 % max. - Load variation 10 – 100 % single output models: 0.75 % max. dual output models: 1.0% max. (balanced load)
Temperature coefficient	$\pm 0.1 \%/^{\circ}\text{C}$
Ripple and noise (20 MHz Bandwidth)	50 mVpk-pk max
Transient Response (25% load step change)	300 μs typ.
Short circuit protection	constant current (automatic recovery)
Capacitive load	3.3 VDC / 5 VDC models: 2'200 μF max. / 1'000 μF max. 12 VDC / 15VDC models: 170 μF max. / 110 μF max. ± 5 VDC / ± 12 VDC models: 470 μF max. / 100 μF max. (each output) ± 15 VDC models: 47 μF max. (each output)

General Specifications

Temperature ranges	- Operating - 40 °C ... + 75 °C (no derating) - Case temperature +100 °C max. - Storage - 55 °C ... + 105 °C
Humidity (non condensing)	95 % rel. H max.
Reliability, calculated MTBF (MIL-HDBK-217F ground benign)	> 1 Mio h @ 25°C
Isolation voltage (60 sec) - Input/Output	1'000 VDC
Isolation capacitance - Input/Output	500 pF max.
Isolation resistance - Input/Output (500 VDC)	> 1'000 M Ohm
Switching frequency	100 to 650 kHz (PFM)
Remote On/Off control	- On: < 0.6 VDC or open - Off: 2.7...15 VDC - Off stand by input current 0.2 mA max.
Case material	non-conductive plastic
Potting material	epoxy, UL94V-0 - rated
Weight	6.5g (0.23oz)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

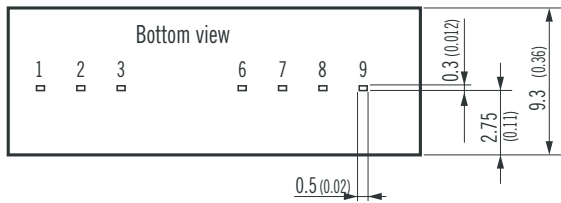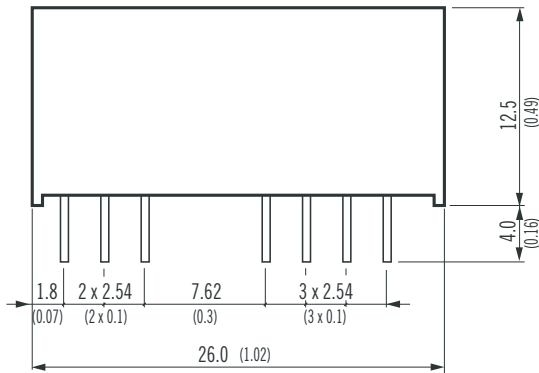

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
6	+Vout	+Vout
7	No function	Common
8	No function	No function
9	-Vout	-Vout

Dimensions in [mm], () = Inch
 Pin diameter $\varnothing 0.5 \pm 0.05$ (0.02 \pm 0.002)
 Tolerances ± 0.5 (0.02)
 Pin pitch tolerances ± 0.2 (0.008)

Specifications can be changed any time without notice