



## Clamp Spring - Spring type terminal blocks / WK series



### WKA500A

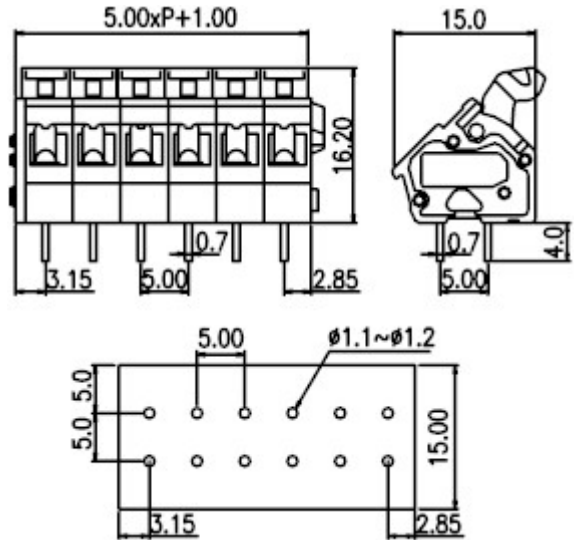

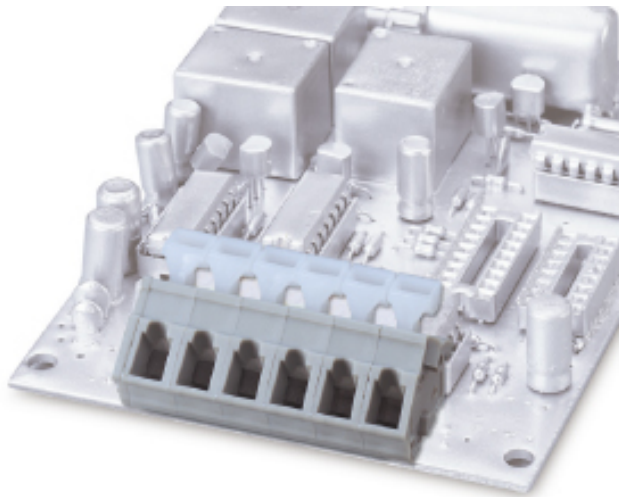





**Pitch: 5.00mm**

Approval		
Technical Data	UL	IEC
Rated voltage	300V	450V
Rated current	15A	24A
Wire range	2.5mm <sup>2</sup>	
Solid wire (AWG)	28-12	
Stranded wire (AWG/mm <sup>2</sup> )	28-12	
Rated surge voltage (UL/IEC/Max.)	1.6 / 2.5 / 3 KV	
Wire strip length	5~6mm	
Single Pole	Cat. No.	
	WKA500A-01X	
End Cover	WKA500AC	
Optional color	Cat. No.	
●	WKA500A-01X	
●	WKA500A-01X-GN	
●	WKA500A-01X-RD	
●	WKA500A-01X-BL	
●	WKA500A-01X-BK	
●	WKA500A-01X-OR	



Pole	Cat. No.
02	WKA500A-02P
03	WKA500A-03P
04	WKA500A-04P
05	WKA500A-05P
06	WKA500A-06P
07	WKA500A-07P
08	WKA500A-08P
09	WKA500A-09P
10	WKA500A-10P
11	WKA500A-11P
12	WKA500A-12P
-	--
-	--

Optional color	Cat. No.
	WKA500A-XXP
	WKA500A-XXP-GN
	WKA500A-XXP-RD
	WKA500A-XXP-BL
	WKA500A-XXP-BK
	WKA500A-XXP-OR

TEL: +886-2-2908-0614

FAX: +886-2-2908-8549

E-mail: [infor@dinkle.com.tw](mailto:infor@dinkle.com.tw)