

# Data sheet Product MK 04 10 G



PCB connectors>Male headers

Solder and plug pins, Ø 0.5 mm Also available as single contact, SK ...

## Features

grid:


2.54 mm

g110.

Z.54 IIIII

no. of contacts:	10
contact material:	CuZn-alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> <li>• Ni+≥0.2µm Au</li> <li>• Ni+4...6µm Sn</li> </ul>
version:	with solder-cup
shock resistance:	50 g
volume resistance:	≤10 mΩ
vibration resistance max.:	15 g
capacity between two adjacent contacts:	≤0,4 pF
nominal current:	1.5 A
nominal voltage:	60 V DC
test voltage:	1000 V
insulating body material:	PA 4.6. GF
temperature range:	<ul style="list-style-type: none"> <li>• -40°C... +163°C</li> <li>• (260°C/10 s)</li> </ul>
class of inflammability:	UL 94 V-0
specific insulation resistance:	>10 <sup>7</sup> Ω·m
connection type:	THT (soldering)
reflow solderable:	yes

## Technical Drawing

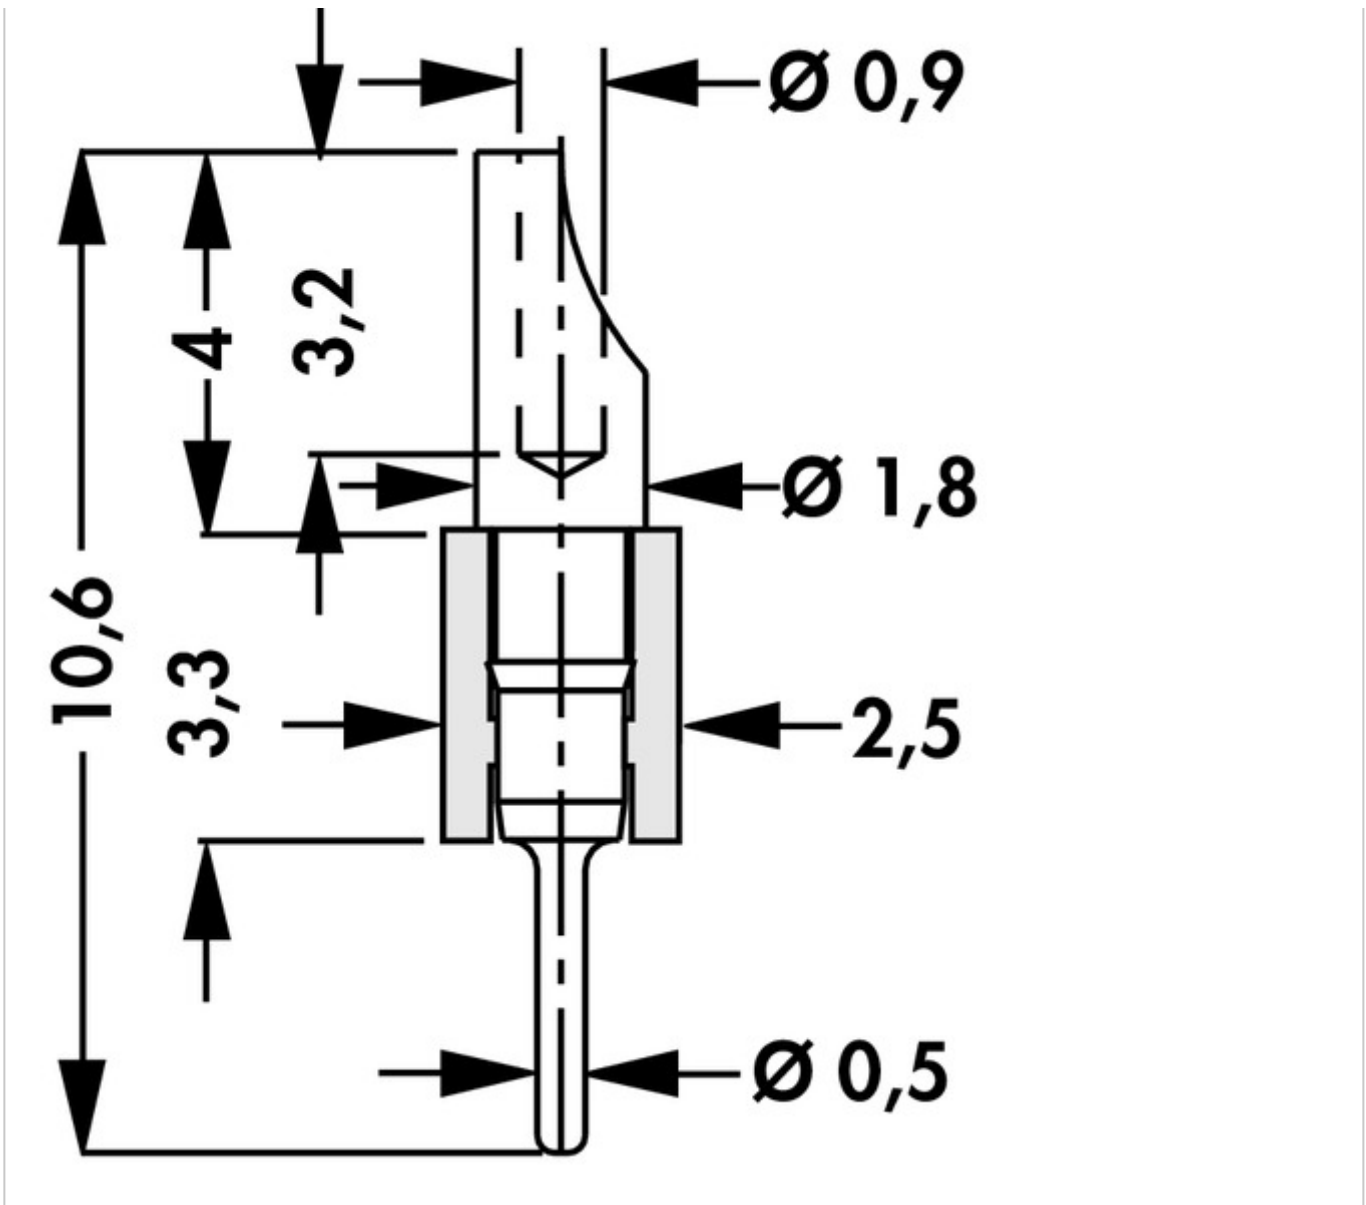

Fischer Elektronik GmbH & Co. KG  
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28  
58511 Lüdenscheid

Telefon +49 2351 435-0  
Telefax +49 2351 45754

info@fischerelektronik.de  
www.fischerelektronik.de