
RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0	KLS17048	New Version Release	Song	2026-09-24

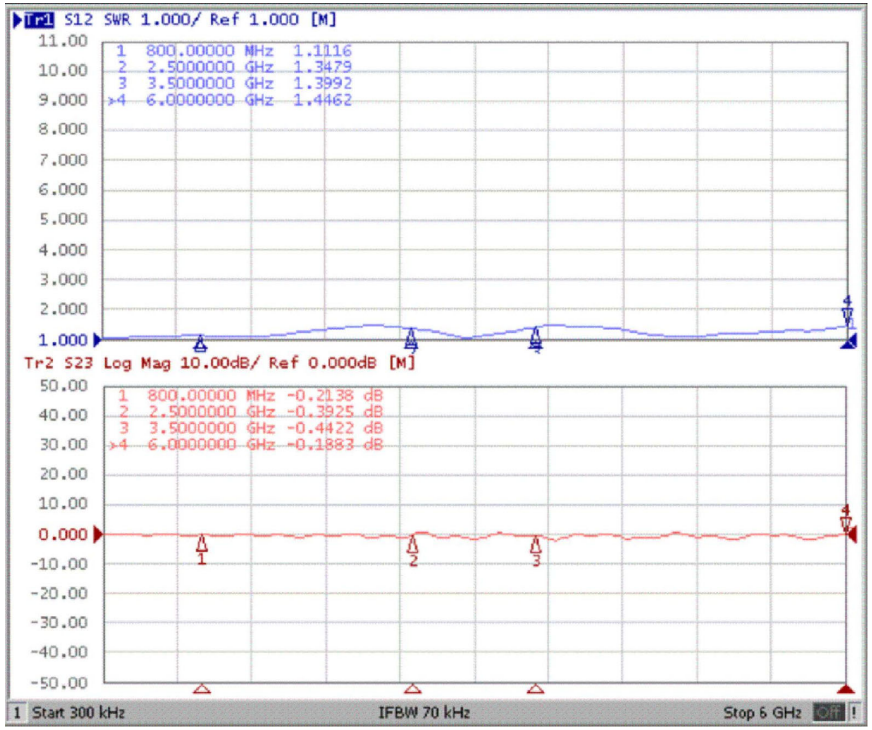

Notes:

1.Material:

Connector:Brass, Gold Plating

2.Electric:

Applicable technical standards:MIL-C-39012 IEC60169-15

Frequency Range:0~6G

Impedance:50 OHM

Vswr:1.5 Max

Conduction Impedence:0.5 OHM

Insulation Resistance:5000MΩ Min

Power:10 W Max

Operating Voltage:335V Max

Durability:500 Cycles

Withstand Voltage:1000Vrms


Temperature:-35°C +80°C

3.The finished product requires 100% electrical testing

4.The product parts must not have scratches, deformation, oil stains or other defects

5.Conduction test requires a voltage withstand of over 500V and a conduction test must be conducted

6.Salt Spray Test:48H Min

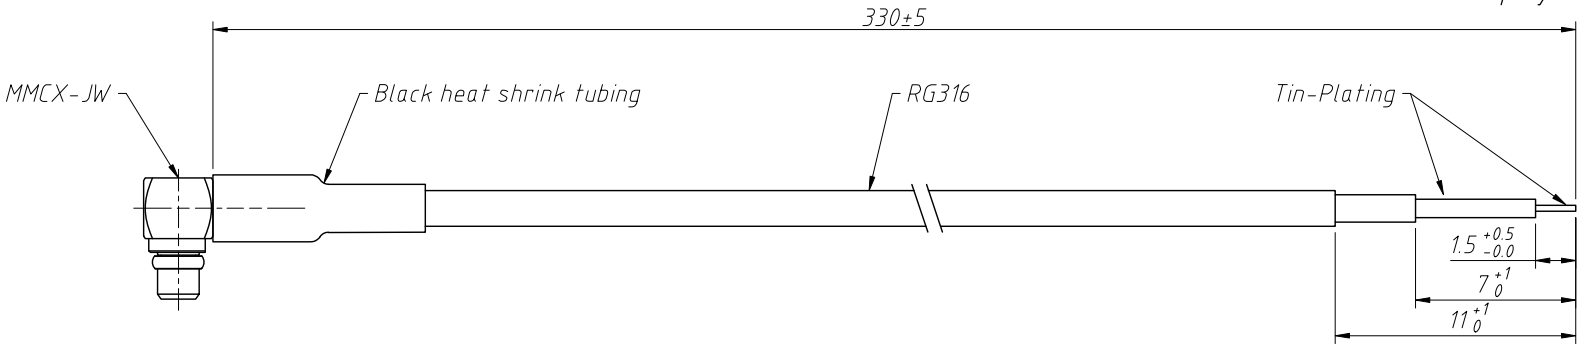

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			Adapter cable	
GENERAL TOLERANCE	UNITS	mm	KLS P/N:	CA49-316-L330
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Song	2026-09-24	
x.xxx ±0.10	Check:	Daniel	2026-09-24	