


Data sheet Product SLR 2 050 G




PCB connectors>Male headers
grid 1.27 x 1.27 mm; Ø 0.43 mm, turned precision contacts, less space required on PCB

Features

grid:	1.27 mm
no. of contacts:	50
contact material:	CuZn-alloy
surface of contact:	gold-plated
surface contact / contact sleeve:	<ul style="list-style-type: none"> • Ni+≥0.2µm Au • Ni+4...6µm Sn
version:	standard
volume resistance:	≤20 mΩ
nominal current:	1 A
nominal voltage:	<ul style="list-style-type: none"> • 100 V AC • 150 V DC
test voltage:	500 V
insulating body material:	PCT, GF
temperature range:	<ul style="list-style-type: none"> • -40°C... +105°C • (260°C/10 s)
class of inflammability:	UL 94 V-0
connection type:	THT (soldering)
reflow solderable:	yes

Technical Drawing

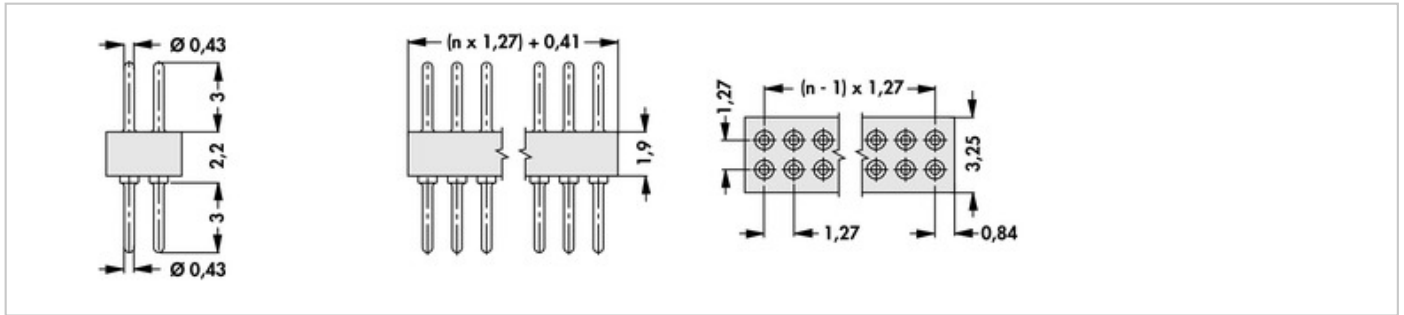

Fischer Elektronik GmbH & Co. KG
DEUTSCHLAND • GERMANY • ALLEMAGNE

Nottebohmstraße 28
58511 Lüdenscheid

Telefon +49 2351 435-0
Telefax +49 2351 45754

info@fischerelektronik.de
www.fischerelektronik.de