
FIBER SPECIFICATIONS								
ITEM #	OPERATING WAVELENGTH	MODE FIELD DIAMETER	NA	CLADDING	COATING	CUTOFF WAVELENGTH		
SMF-28ULTRA	1260 - 1625 nm	9.2 ± 0.4 µm @ 1310 nm 10.4 ± 0.5 µm @ 1550 nm	0.14	125 ± 0.7 μm	242 ± 5 μm	<1260 nm		

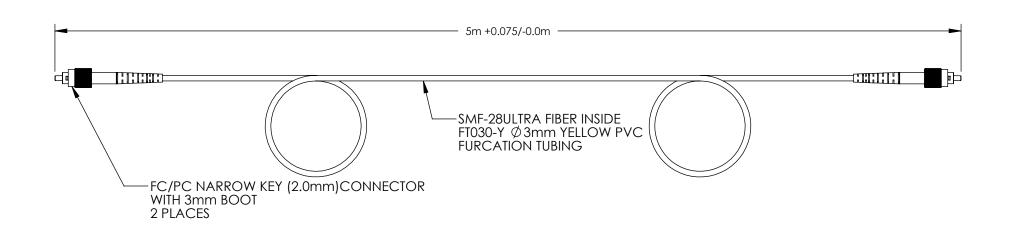

INCLUDED BUT NOT SHOWN:
• 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECT			THORLABS  www.thorlabs.com  5m SMF-28ULTRA		
	NAME	DATE			
DRAWN	BD	09/MAY/11	FC/PC PATCH CABLE		
APPROVAL	BAG	24/NOV/15	MATERIAL		REV
COPYR	IGHT © 2015	BY THORLABS	N/A		
		ARE CALCULATED UNDOFF ERRORS	P1-SMF28E-FC-5	0.02	igнт ka