



Quartz Crystal

SMD-version


part no.	12.60063
model	KX – 7T
frequency	8.0 MHz
mode	fundamental
operating temperature	-40° ~ +85°C
frequency tolerance at +25°C	±30 ppm
temperature tolerance -40° ~ +85°C	±100 ppm
load capacitance C_L	12 pF
series resistance R1 max.	800 Ohm
aging at +25°C (first year) max.	±2 ppm
shunt capacitance C_0 max.	3.5 pF
drive level max.	200 µW
contents of reel	1000 pcs.

Dimensions (mm):

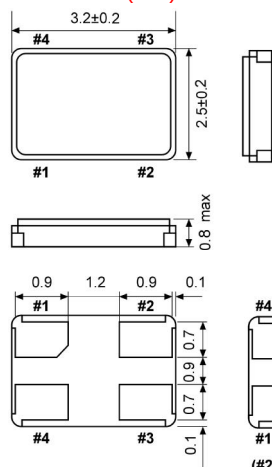


(#2 & #4: connected to metal lid)
(#2 & #4: do not connect to circuit ground)

Reflow soldering condition:

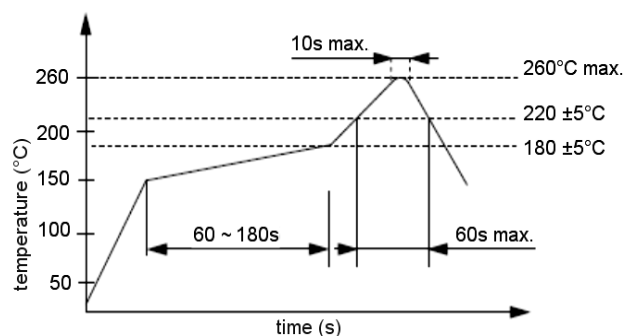

Suggested soldering pad:



Tape specification:

