
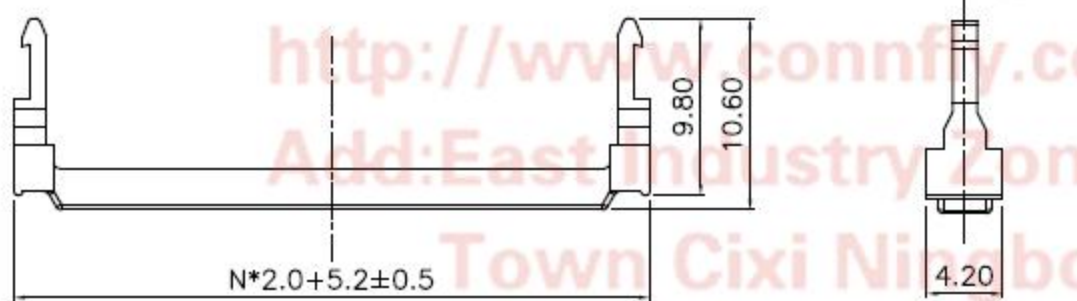
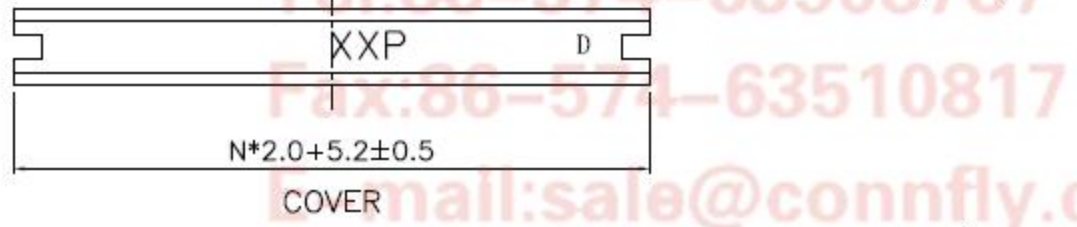
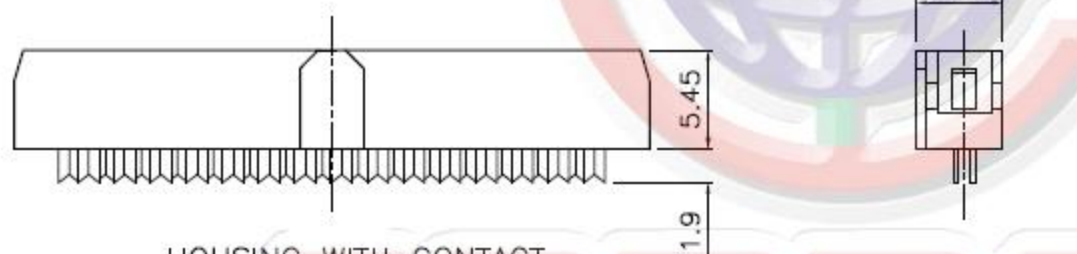


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

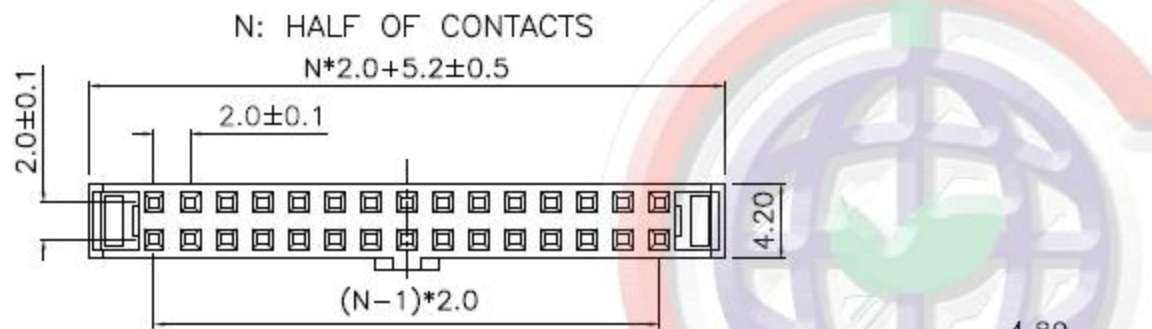

NOTES:

- MATERIAL
 - INSULATOR: THERMOPLASTIC (UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE: -40~+105°C.
 - CONTACT RESISTANCE: 20mΩ max.
 - INSULATION RESISTANCE: 1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PART NUMBER: DS1017

DS1017- X X X X X

HOUSING COLOR
G: GRAY
B: BLACK
L: BLUE

CONTACT PLATING
8: FULL GOLD FLASH
6: FULL TIN
2: NICKEL+GOLD FLASH

POLARIZATION
A: W/
B: W/O

STRAIN RELIEF
M: W/
N: W/O

No. OF CONTACTS
10 12 14 16 20 22 24 26
30 34 36 40 44 50 56 68

Tel: 86-574-63508787
Fax: 86-574-63510817
Email: sale@connfly.com
http://www.connfly.com
Add: East Industry Zone, Kuang Ya
Town, Cixi, Ningbo, China
P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE	INDICATOR	
UNITS	mm	INDICATOR	
SHEET SIZE	A4	SERIES	DS1017 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1017-XXXXX		


晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO., LTD