

TERMINAL BLOCK Connector

PCB Series

KLS2-102-5.00 Series Pitch=5.00mm/10.00mm

Electrical :

Rated voltage: 300V
 Rated current: 16A
 Contact resistance: 20mΩ
 Insulation resistance: 5000MΩ/1000V
 Withstanding Voltage: AC1500V/1Min
 Wire range: 22-12AWG 2.5mm²


Material

Screws: M2.5 steel Zinc plated
 Wire guard: phosphor bronze Ni plated or stainless steel
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0



Mechanical

Temp. Range: -40°C~+105°C
 MAX Soldering: 250°C for 5 Sec.
 Torque: 0.4Nm (3.6lb.in)
 Strip length: 4.5-5mm

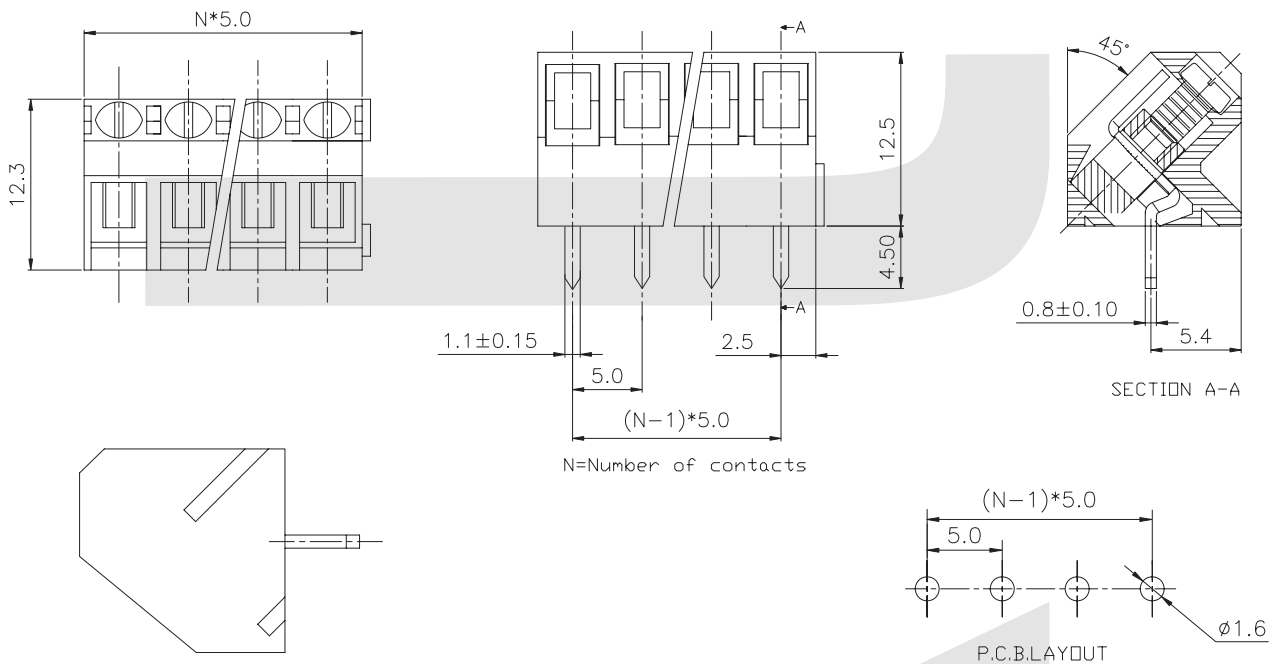

ORDER INFORMATION

Product No.: KLS2-102-5.00-XXP-X X-X

Pos. No.	Customer Request
Series No.	Screw: C=Cross Screw S=Slot Screw
Pitch: 5.00=5.00mm 10.00=10.00mm	Color: 1=Gray 2=Blue 3=Black 4=Green 5=Orange 6=Red 7=Transparent 8=Yellow 9=White
Number of Pole	