




ACCORD CO., LTD.



AK-207-A-SSB-WP-MM

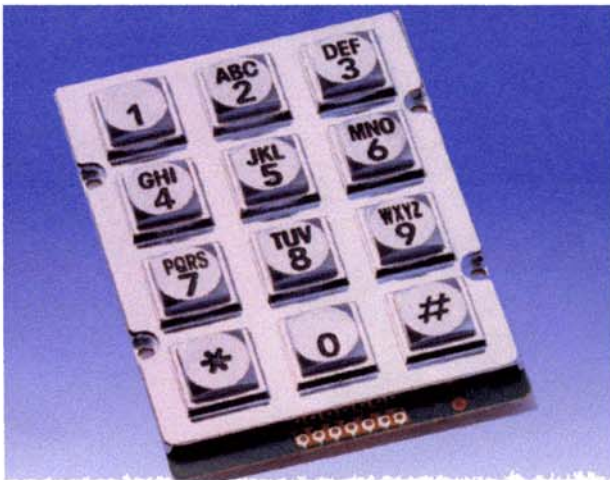


AK-207-N-SSB-WP-MM

GENERAL SPECIFICATION


- Contact rating: 20mA, 24VDC
- Contact resistance: 200 ohm max
- Life: 2,000,000 cycles per key
- Operating Temperature: -20°C to +60°C
- Storage Temperature: -40°C to +65°C

CIRCUIT DIAGRAM



AK-207

OUTPUT ARRANGEMENT	
OUTPUT PIN NO.	SYMBOL
1	COL 2
2	ROW 1
3	COL 1
4	ROW 4
5	COL 3
6	ROW 3
7	ROW 2

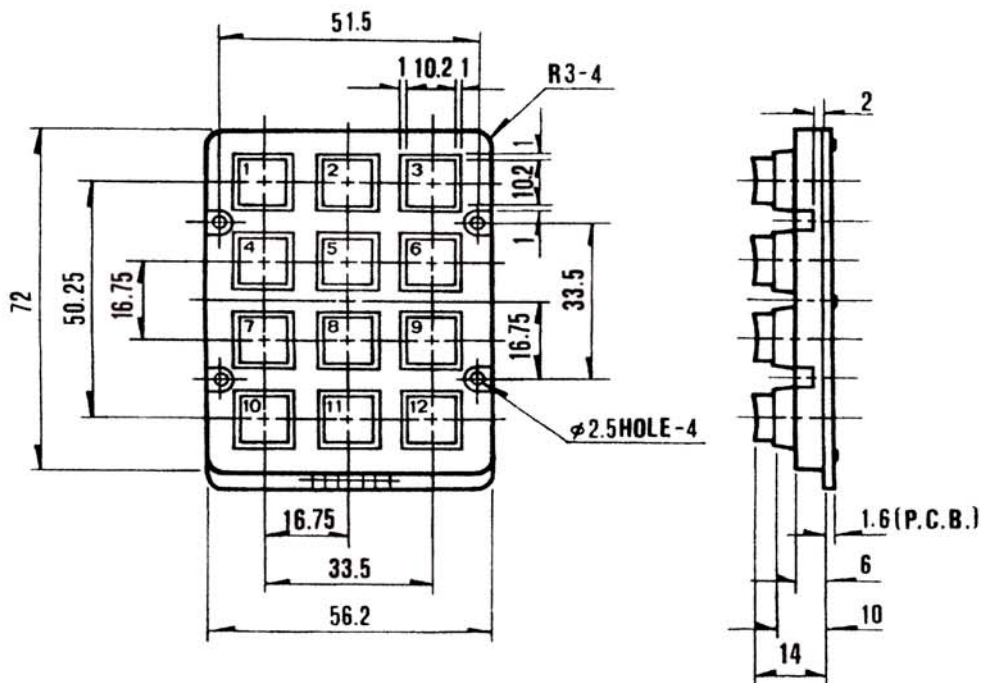

ACTUATING FORCE: 120±30 GRAMS.
STROKE: 2.0±0.5mm

ACCORD CO., LTD.

8th Fl., No. 398, Jen Ai Road, Sec. 4, Taipei, Taiwan.

Tel: 886-2-2704-4503


Fax: 886-2-2703-6358

E-mail: accordia@ms4.hinet.net


http://www.accordia.com.tw

ТЕЛЕФОННЫЕ КЛАВИАТУРЫ


AK-207




AK-304




AK-507




AK-707




AK-804




AK-1604



AK-1607



AK-1607 металл



Основные параметры:


Режим работы контактов 24В 20мА
 Сопротивление контактов <200 Ом
 Ресурс 1000000 циклов на контакт
 Рабочая температура -20 +60С

Система обозначений: AK-207-N-SSB-WP-MM
 1 2 345 6 7


1) Номер модели	207, 304, 304FM, 507, 707, 804, 1604, 1607	4) Цвет кнопок	W - белый B - черный G - серый I - слоновая кость S - серебристый (для металлических панелей)
2) Тип символов	A (алфавитно-цифровая) N (числовая)	5) Цвет символов	W - белый B - черный
3) Цвет панели	W - белый B - черный G - серый I - слоновая кость S - серебристый (для металлических панелей)	6) Водонепроницаемость	WP
		7) Металл	MM

ТЕЛЕФОННЫЕ КЛАВИАТУРЫ


TF-0282




TF-0284



TF-0286



TF-0286-1



Материал: ABC

Цвет: белый,
черный

**Количество
кнопок:** 12, 16

**Количество
контактов:** 7, 8

Основа:
печатная плата