


CU16025-TW200A

SIMPLIFIED DATASHEET

Features

16 character x 2 line display character module.
Built-in ASCII, katakana, and International fonts.

Outer dimension

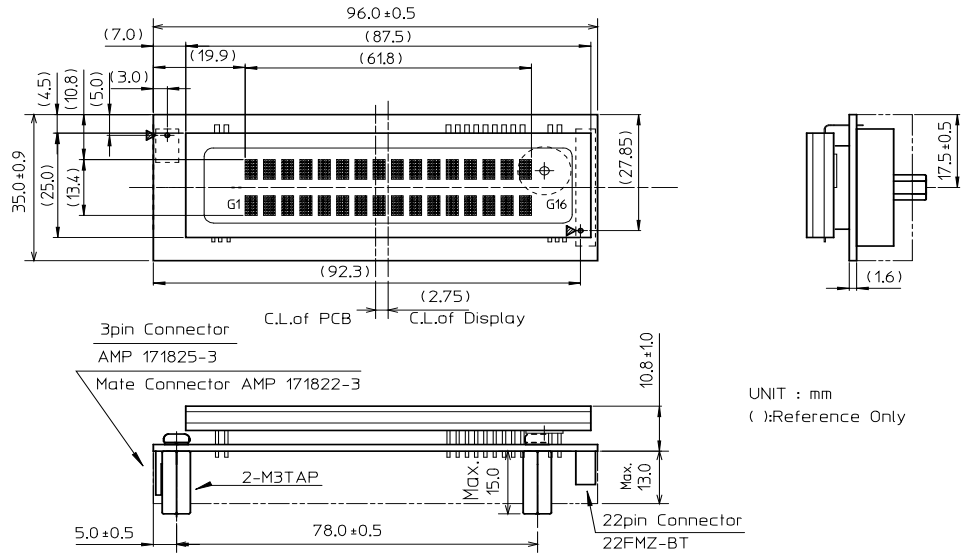

Get full specification
Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Input Voltage (D7-D0,WR,CS)						
H	VIH	2.0	-	VCC	VDC	Vcc=5.0V
L	VIL	0	-	0.8		TA=25°C
(RESET)						
H	VIH	3.5	-	-	VDC	
L	VIL	-	-	1.5		
Output Voltage						
H	VOH	2.4	-	-		IOH=-8mA
L	VOL	-	-	0.5		IOL=8mA
Power Supply Current	Icc	-	130	170	mADC	All dots ON

Optical Characteristics

Parameter	
Luminance	350 cd/m ² Min.
Color of illumination	Green (Blue-Green)

Environmental Conditions

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	980m/s ² (100G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	
Number of Char.	32 (16 characters x 2 lines)
Built-in Fonts	ANK, International Font
Character Format	5 x 7 dot matrix
Display Area	61.8 x 13.4 mm (X x Y)
Character Size	2.55 x 4.7 mm (X x Y)
Character Pitch	3.95 mm
Line Pitch	8.7 mm

Interface

Parallel, Asynchronous Serial (TTL)

Pin Assignment (Parallel / Serial)

Pin No	Signal	Pin No	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	WR	10	CS
11	SIN/TO	12	BUSY
13	GND	14	GND
15	VCC	16	VCC
17	VCC	18	GND
19	GND	20	GND
21	GND	22	RESET

(Serial)

Pin No	Signal	Baud Rate Setting
1	VCC	19200bps*
2	SIN/TO	9600bps
3	GND	4800bps
		2400bps
		1200bps
		600bps
		(*:factory default)

Functions

Parameter
Auto initialized
Command Control
Blink speed control
Flicker less Mode / Quick Write Mode
etc.



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.