
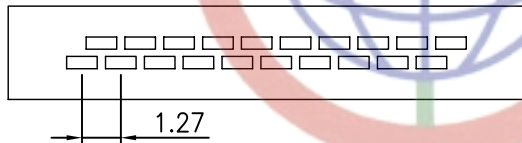


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'		

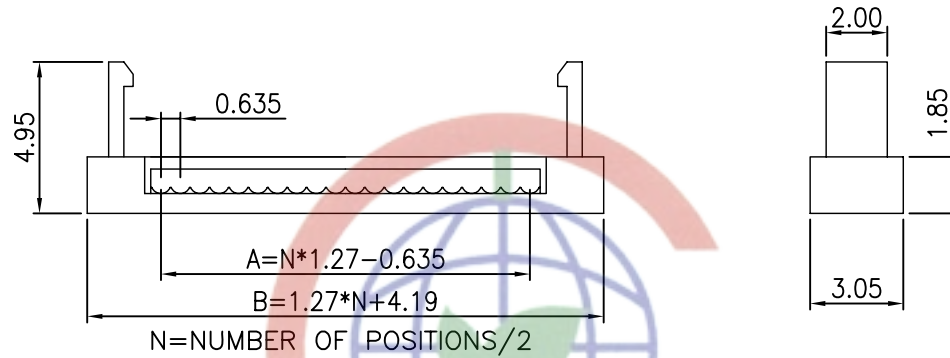

COVER

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE RANGE:-40°C~+105°C.
 - CONTACT RESISTANCE:20mΩ max.
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.
- PACKING: PVC TRAY.
- PRODUCT NUMBER CODE:

DS1017-01- X X X X




CONTACT PLATING
8: FULL GOLD FLASH
2: NICKEL + GOLD FLASH
6: FULL Tin

POLARIZATION
A: W/O
B: W/O

STRAIN RELIEF
N: W/O

No. OF CONTACTS
10 12 14 16 20 26 30 34
40 44 50 60 68 80 100

SERIES No.
DS1017

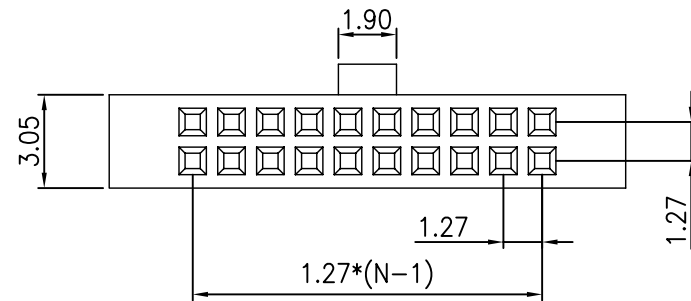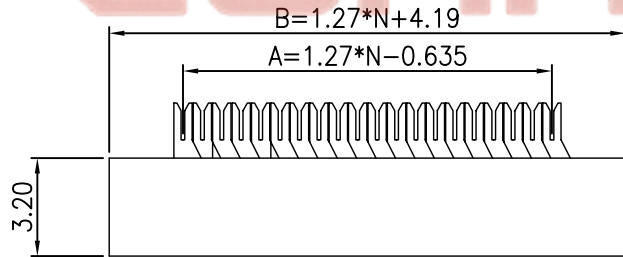

HOUSING

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	IDC SOCKET PITCH 1.27mm WITH 0.635mm FLAT CABLE				
X.	±0.60	X.	±5°	UNITS	mm						
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017-01 SERIES				
.XX	±0.25	.XX	±2°								
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD							
SCALE		1:1						SHEET		1 OF 1	
DRAWING NO.		C-DS1017-01-XXXX									

Tel:86-574-635087
 Fax:86-574-635108
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com