CY7C1069AV33

2M x 8 Static RAM

Features

- **High speed**
  - **—t_{AA} = 8, 10, 12 ns**
- **Low active power**
  - **—1080 mW (max.)**
- **Operating voltages of 3.3 ± 0.3V**
- **2.0V data retention**
- **Automatic power-down when deselected**
- **TTL-compatible inputs and outputs**
- **Easy memory expansion with $\overline{CE}_1$ and CE_2 features**

Functional Description

The CY7C1069AV33 is a high-performance CMOS Static RAM organized as 2,097,152 words by 8 bits. Writing to the device is accomplished by enabling the chip (by taking $\overline{CE}_1$ LOW and CE_2 HIGH) and Write Enable ($\overline{WE}$) inputs LOW.

Reading from the device is accomplished by enabling the chip ($\overline{CE}_1$ LOW and CE_2 HIGH) as well as forcing the Output Enable ($\overline{OE}$) LOW while forcing the Write Enable ($\overline{WE}$) HIGH. See the truth table at the back of this data sheet for a complete description of Read and Write modes.

The input/output pins (I/O_0 through I/O_7) are placed in a high-impedance state when the device is deselected ($\overline{CE}_1$ HIGH or CE_2 LOW), the outputs are disabled ($\overline{OE}$ HIGH), or during a Write operation ($\overline{CE}_1$ LOW, CE_2 HIGH, and $\overline{WE}$ LOW).

The CY7C1069AV33 is available in a 54-pin TSOP II package with center power and ground (revolutionary) pinout, and a 48-ball fine-pitch ball grid array (FBGA) package.
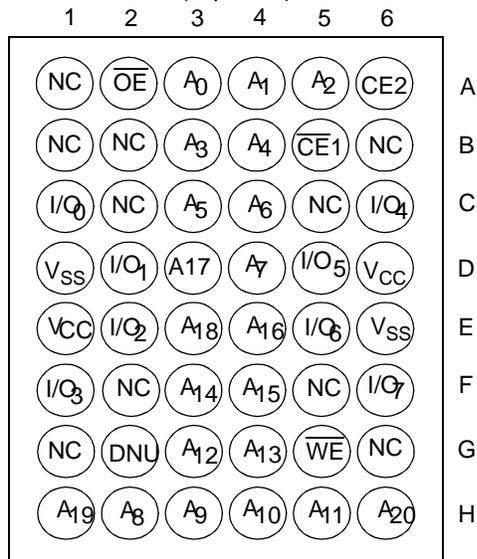
Logic Block Diagram
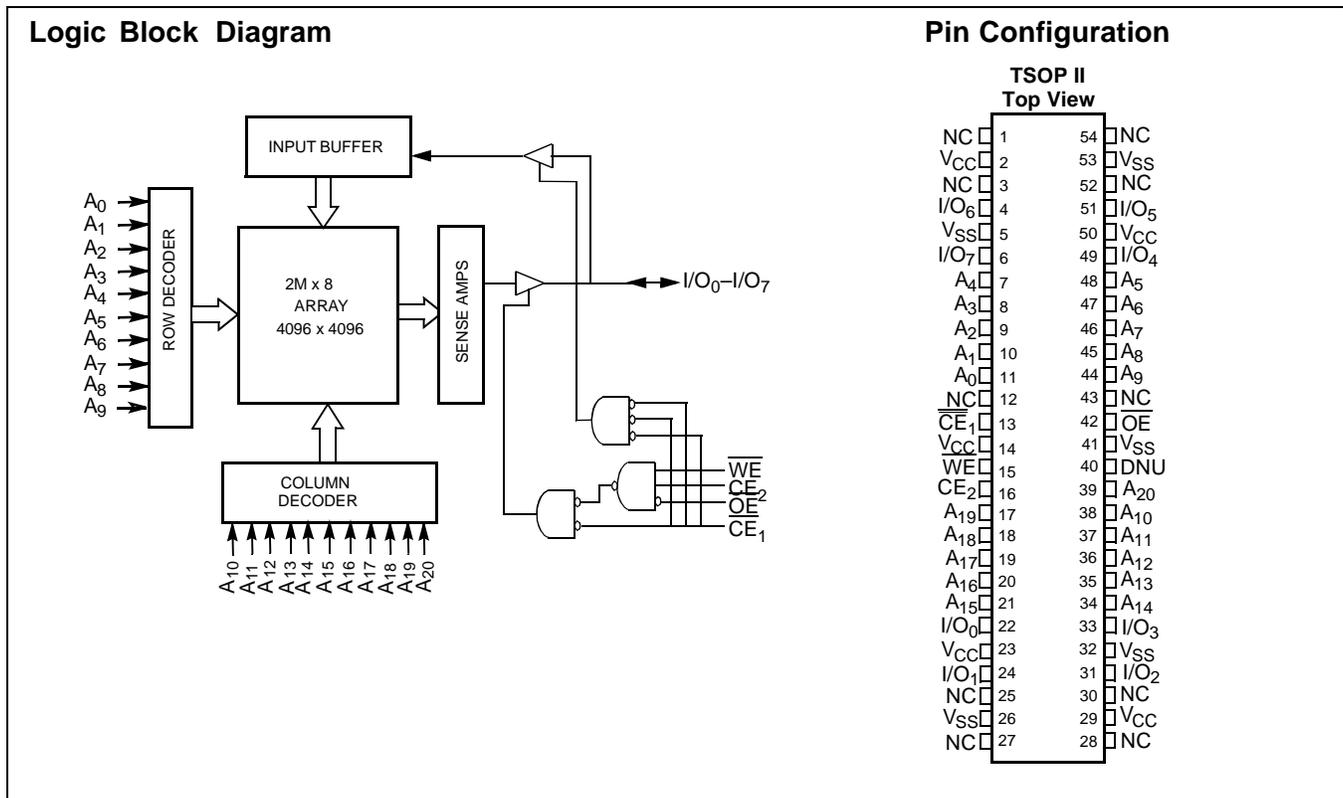
Pin Configuration

Selection Guide

		–8	–10	–12	Unit
Maximum Access Time		8	10	12	ns
Maximum Operating Current	Commercial	300	275	260	mA
	Industrial	300	275	260	
Maximum CMOS Standby Current	Commercial/Industrial	50	50	50	mA

Cypress Semiconductor Corporation • 3901 North First Street • San Jose, CA 95134 • 408-943-2600
Document #: 38-05255 Rev. *D

Revised February 10, 2003

Pin Configurations

48-ball FBGA

(Top View)

	1	2	3	4	5	6	
A	NC	$\overline{OE}$	A_0	A_1	A_2	CE2	
B	NC	NC	A_3	A_4	$\overline{CE1}$	NC	
C	I/O_0	NC	A_5	A_6	NC	I/O_4	
D	V_{SS}	I/O_1	A17	A_7	I/O_5	V_{CC}	
E	V_{CC}	I/O_2	A_{18}	A_{16}	I/O_6	V_{SS}	
F	I/O_3	NC	A_{14}	A_{15}	NC	I/O_7	
G	NC	DNU	A_{12}	A_{13}	$\overline{WE}$	NC	
H	A_{19}	A_8	A_9	A_{10}	A_{11}	A_{20}	

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature ....–65°C to +150°C

Ambient Temperature with
Power Applied...–55°C to +125°C

Supply Voltage on V_{CC} to Relative GND[1] .... –0.5V to +4.6V

DC Voltage Applied to Outputs
in High-Z State[1] ....–0.5V to V_{CC} + 0.5V

DC Input Voltage[1] ....–0.5V to V_{CC} + 0.5V

Current into Outputs (LOW).. 20 mA

Operating Range

Range	Ambient Temperature	V_{CC}
Commercial	0°C to +70°C	3.3V ± 0.3V
Industrial	–40°C to +85°C	

DC Electrical Characteristics Over the Operating Range

Parameter	Description	Test Conditions		–8 Min.	–8 Max.	–10 Min.	–10 Max.	–12 Min.	–12 Max.	Unit
V_{OH}	Output HIGH Voltage	V_{CC} = Min., I_{OH} = –4.0 mA		2.4		2.4		2.4		V
V_{OL}	Output LOW Voltage	V_{CC} = Min., I_{OL} = 8.0 mA			0.4		0.4		0.4	V
V_{IH}	Input HIGH Voltage			2.0	V_{CC} + 0.3	2.0	V_{CC} + 0.3	2.0	V_{CC} + 0.3	V
V_{IL}	Input LOW Voltage[1]			–0.3	0.8	–0.3	0.8	–0.3	0.8	V
I_{IX}	Input Load Current	GND ≤ V_I ≤ V_{CC}		–1	+1	–1	+1	–1	+1	µA
I_{OZ}	Output Leakage Current	GND ≤ V_{OUT} ≤ V_{CC}, Output Disabled		–1	+1	–1	+1	–1	+1	µA
I_{CC}	V_{CC} Operating Supply Current	V_{CC} = Max., f = f_{MAX} = 1/t_{RC}	Commercial		300		275		260	mA
			Industrial		300		275		260	mA
I_{SB1}	Automatic CE Power-down Current —TTL Inputs	CE_2 ≤ V_{IL}, Max. V_{CC}, $\overline{SCE}$ ≥ V_{IH} V_{IN} ≥ V_{IH} or V_{IN} ≤ V_{IL}, f = f_{MAX}			70		70		70	mA
I_{SB2}	Automatic CE Power-down Current —CMOS Inputs	CE_2 ≤ 0.3V Max. V_{CC}, $\overline{CE}$ ≥ V_{CC} – 0.3V, V_{IN} ≥ V_{CC} – 0.3V, or V_{IN} ≤ 0.3V, f = 0	Commercial/ Industrial		50		50		50	mA

Capacitance[2]

Parameter	Package	Description	Test Conditions	Max.	Unit
C_{IN}	Z54	Input Capacitance	T_A = 25°C, f = 1 MHz, V_{CC} = 3.3V	6	pF
	BA48			8	pF
C_{OUT}	Z54	I/O Capacitance		8	pF
	BA48			10	pF

Notes:
1. V_{IL} (min.) = –2.0V for pulse durations of less than 20 ns.
2. Tested initially and after any design or process changes that may affect these parameters.

AC Test Loads and Waveforms[3]

(a)
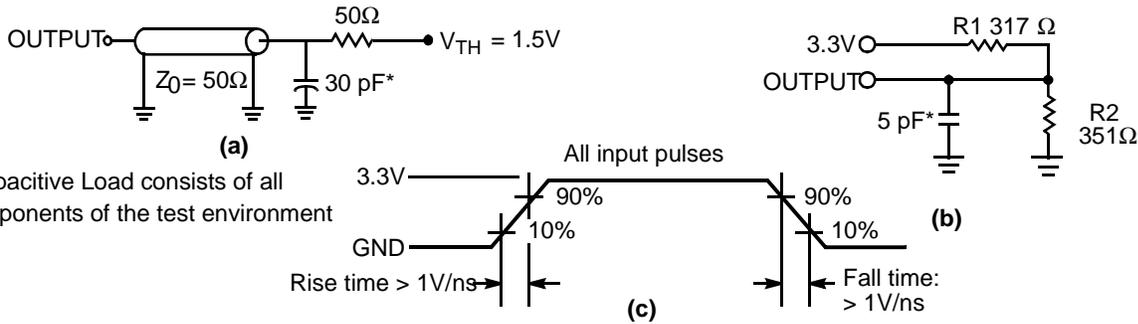
*Capacitive Load consists of all components of the test environment

(b)

*Including jig and scope

(c)

Rise time > 1V/ns   Fall time: > 1V/ns

AC Switching Characteristics Over the Operating Range [4]

Parameter	Description	−8		−10		−12		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Read Cycle								
t_{power}	V_{CC}(typical) to the First Access[5]	1		1		1		ms
t_{RC}	Read Cycle Time	8		10		12		ns
t_{AA}	Address to Data Valid		10		10		12	ns
t_{OHA}	Data Hold from Address Change	3		3		3		ns
t_{ACE}	$\overline{CE}_1$ LOW/CE_2 HIGH to Data Valid		8		10		12	ns
t_{DOE}	$\overline{OE}$ LOW to Data Valid		5		5		6	ns
t_{LZOE}	$\overline{OE}$ LOW to Low-Z[6]	1		1		1		ns
t_{HZOE}	$\overline{OE}$ HIGH to High-Z[6]		5		5		6	ns
t_{LZCE}	$\overline{CE}_1$ LOW/CE_2 HIGH to Low-Z[6]	3		3		3		ns
t_{HZCE}	$\overline{CE}_1$ HIGH/CE_2 LOW to High-Z[6]		5		5		6	ns
t_{PU}	$\overline{CE}_1$ LOW/CE_2 HIGH to Power-up[7]	0		0		0		ns
t_{PD}	$\overline{CE}_1$ HIGH/CE_2 LOW to Power-down[7]		8		10		12	ns
Write Cycle[8, 9]								
t_{WC}	Write Cycle Time	8		10		12		ns
t_{SCE}	$\overline{CE}_1$ LOW/CE_2 HIGH to Write End	6		7		8		ns
t_{AW}	Address Set-up to Write End	6		7		8		ns
t_{HA}	Address Hold from Write End	0		0		0		ns
t_{SA}	Address Set-up to Write Start	0		0		0		ns
t_{PWE}	$\overline{WE}$ Pulse Width	6		7		8		ns
t_{SD}	Data Set-up to Write End	5		5.5		6		ns
t_{HD}	Data Hold from Write End	0		0		0		ns
t_{LZWE}	$\overline{WE}$ HIGH to Low-Z[6]	3		3		3		ns
t_{HZWE}	$\overline{WE}$ LOW to High-Z[6]		5		5		6	ns

Notes:
3. Valid SRAM operation does not occur until the power supplies have reached the minimum operating V_{DD} (3.0V). As soon as 1ms (T_{power}) after reaching the minimum operating V_{DD} , normal SRAM operation can begin including reduction in V_{DD} to the data retention (V_{CCDR}, 2.0V) voltage.
4. Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5V, input pulse levels of 0 to 3.0V, and output loading of the specified I_{OL}/I_{OH} and transmission line loads. Test conditions for the Read cycle use output loading shown in part a) of the AC test loads, unless specified otherwise.
5. This part has a voltage regulator which steps down the voltage from 3V to 2V internally. t_{power} time has to be provided initially before a Read/Write operation is started.
6. t_{HZOE}, t_{HZSCE}, t_{HZWE} and t_{LZOE}, t_{LZCE}, and t_{LZWE} are specified with a load capacitance of 5 pF as in (b) of AC Test Loads. Transition is measured ±200 mV from steady-state voltage.
7. These parameters are guaranteed by design and are not tested.
8. The internal Write time of the memory is defined by the overlap of $\overline{CE}_1$ LOW / CE_2 HIGH, and $\overline{WE}$ LOW. $\overline{CE}_1$ and $\overline{WE}$ must be LOW along with CE_2 HIGH to initiate a Write, and the transition of any of these signals can terminate the Write. The input data set-up and hold timing should be referenced to the leading edge of the signal that terminates the Write.
9. The minimum Write cycle time for Write Cycle No. 3 ($\overline{WE}$ controlled, $\overline{OE}$ LOW) is the sum of t_{HZWE} and t_{SD}.

Data Retention Waveform
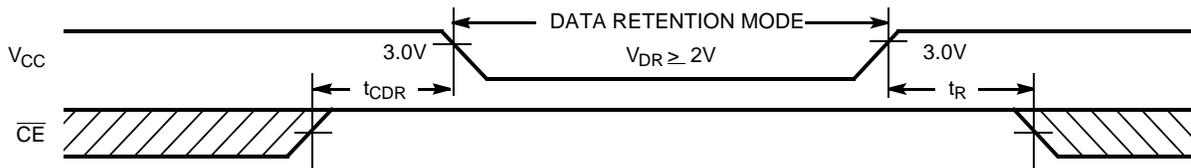
Switching Waveforms

Read Cycle No. 1[10, 11]
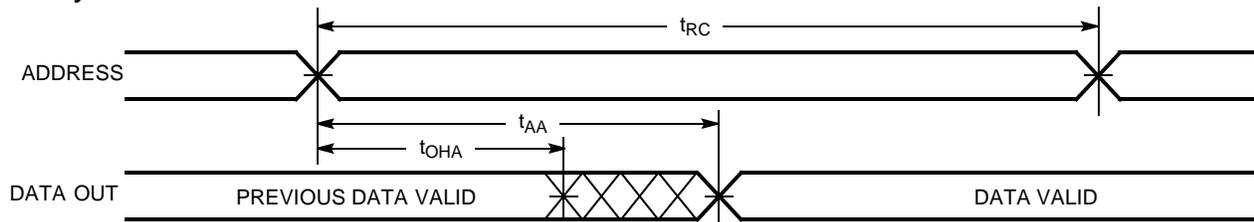
Read Cycle No. 2 ($\overline{OE}$ Controlled) [11, 12]
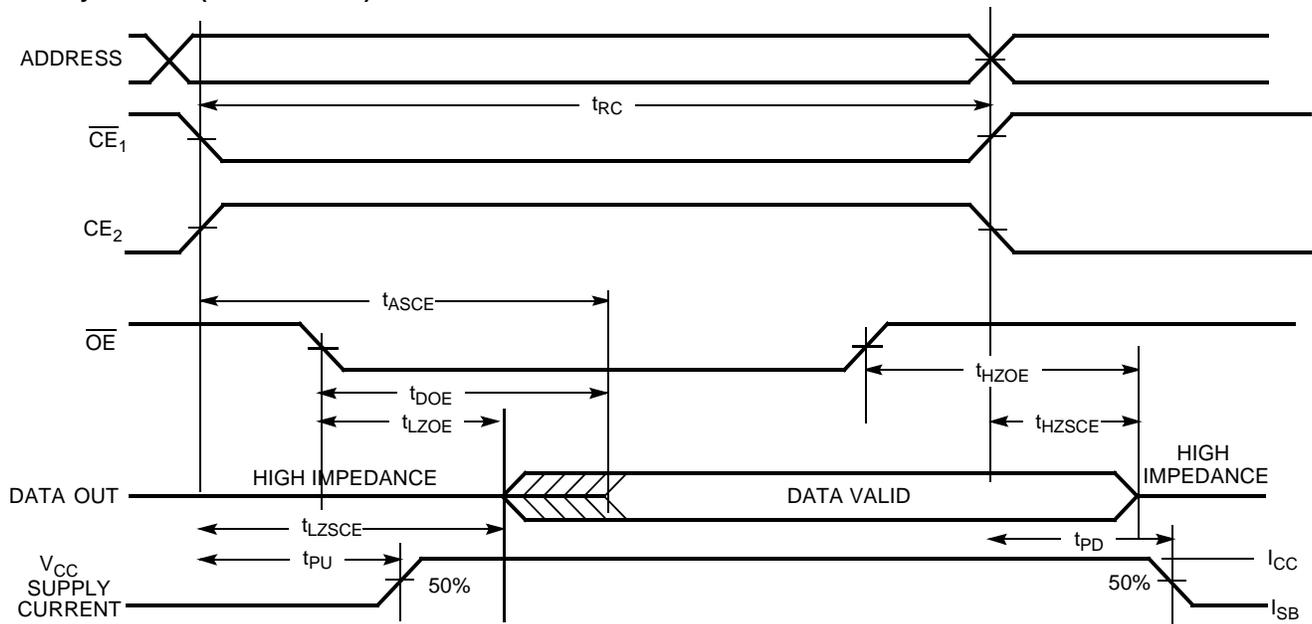
Notes:
10. Device is continuously selected. $\overline{CE}_1 = V_{IL}$, $CE_2 = V_{IH}$.
11. $\overline{WE}$ is HIGH for Read cycle.

Switching Waveforms (continued)

Write Cycle No. 1 ($\overline{CE_1}$ Controlled)[13, 14, 15]
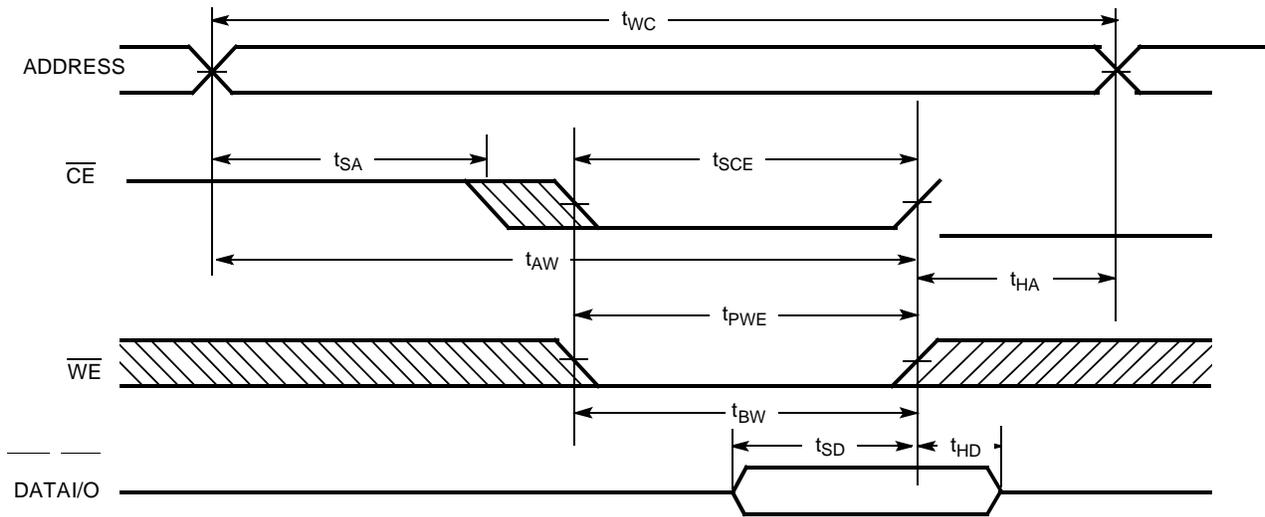
**Write Cycle No. 2 ($\overline{WE}$ Controlled, $\overline{OE}$ LOW)** [13, 14, 15]
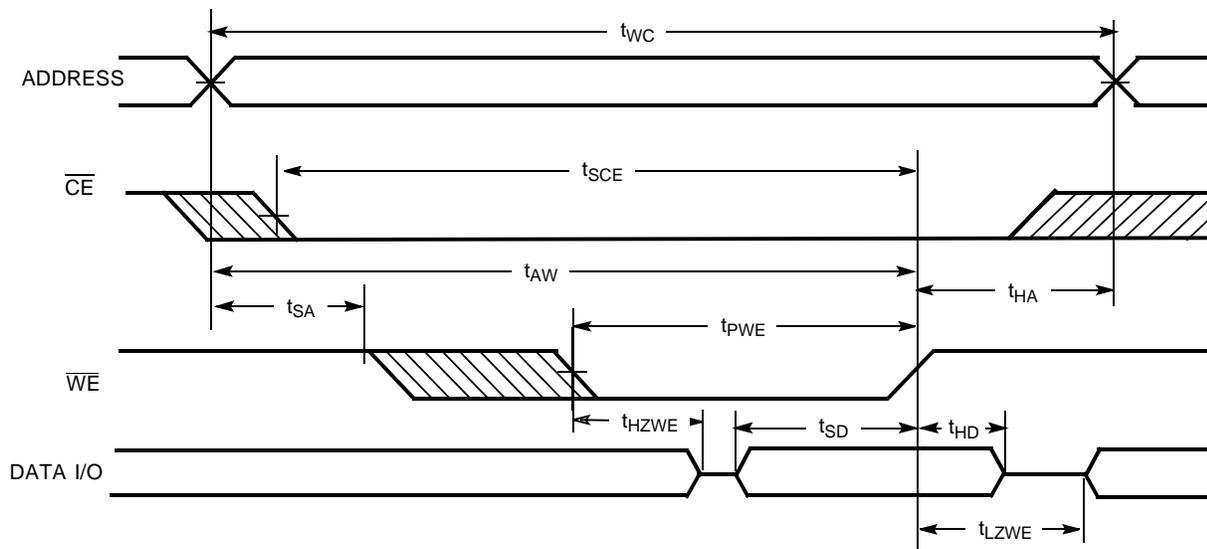
Truth Table

$\overline{CE_1}$	CE_2	$\overline{OE}$	$\overline{WE}$	I/O_0–I/O_7	Mode	Power
H	X	X	X	High-Z	Power-down	Standby (I_{SB})
X	L	X	X	High-Z	Power-down	Standby (I_{SB})
L	H	L	H	Data Out	Read All Bits	Active (I_{CC})
L	H	X	L	Data In	Write All Bits	Active (I_{CC})
L	H	H	H	High-Z	Selected, Outputs Disabled	Active (I_{CC})

Notes:
12. Address valid prior to or coincident with $\overline{CE_1}$ transition LOW and CE_2 transition HIGH.
13. Data I/O is high-impedance if $\overline{OE}$ = V_{IH}.
14. If $\overline{CE_1}$ goes HIGH / CE_2 LOW simultaneously with $\overline{WE}$ going HIGH, the output remains in a high–impedance state.
15. $\overline{CE}$ above is defined as a combination of $\overline{CE_1}$ and CE_2. It is active low.

Ordering Information

Speed (ns)	Ordering Code[16]	Package Name	Package Type	Operating Range
8	CY7C1069AV33-8ZC	Z54	54-pin TSOP II	Commercial
	CY7C1069AV33-8ZI			Industrial
	CY7C1069AV33-8BAC	BA48	48-ball Mini BGA	Commercial
	CY7C1069AV33-8BAI			Industrial
10	CY7C1069AV33-10ZC	Z54	54-pin TSOP II	Commercial
	CY7C1069AV33-10ZI			Industrial
	CY7C1069AV33-10BAC	BA48	48-ball Mini BGA	Commercial
	CY7C1069AV33-10BAI			Industrial
12	CY7C1069AV33-12ZC	Z54	54-pin TSOP II	Commercial
	CY7C1069AV33-12ZI			Industrial
	CY7C1069AV33-12BAC	BA48	48-ball Mini BGA	Commercial
	CY7C1069AV33-12BAI			Industrial

Package Diagrams

54-lead Thin Small Outline Package, Type II Z54-II

51-85160-**
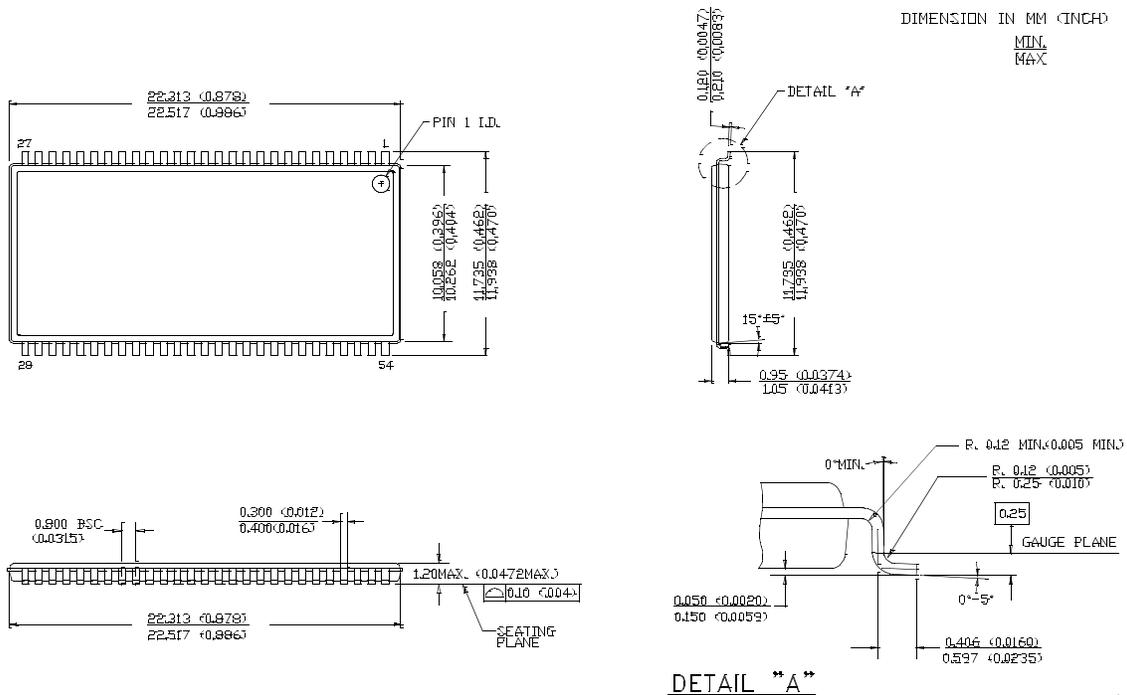
Note:
16. Contact a Cypress Representative for availability of the 48-ball Mini BGA (BA48) package.

Package Diagrams (continued)

48-ball (8 mm x 20 mm x 1.2 mm) FBGA BA48G

51-85162-*A
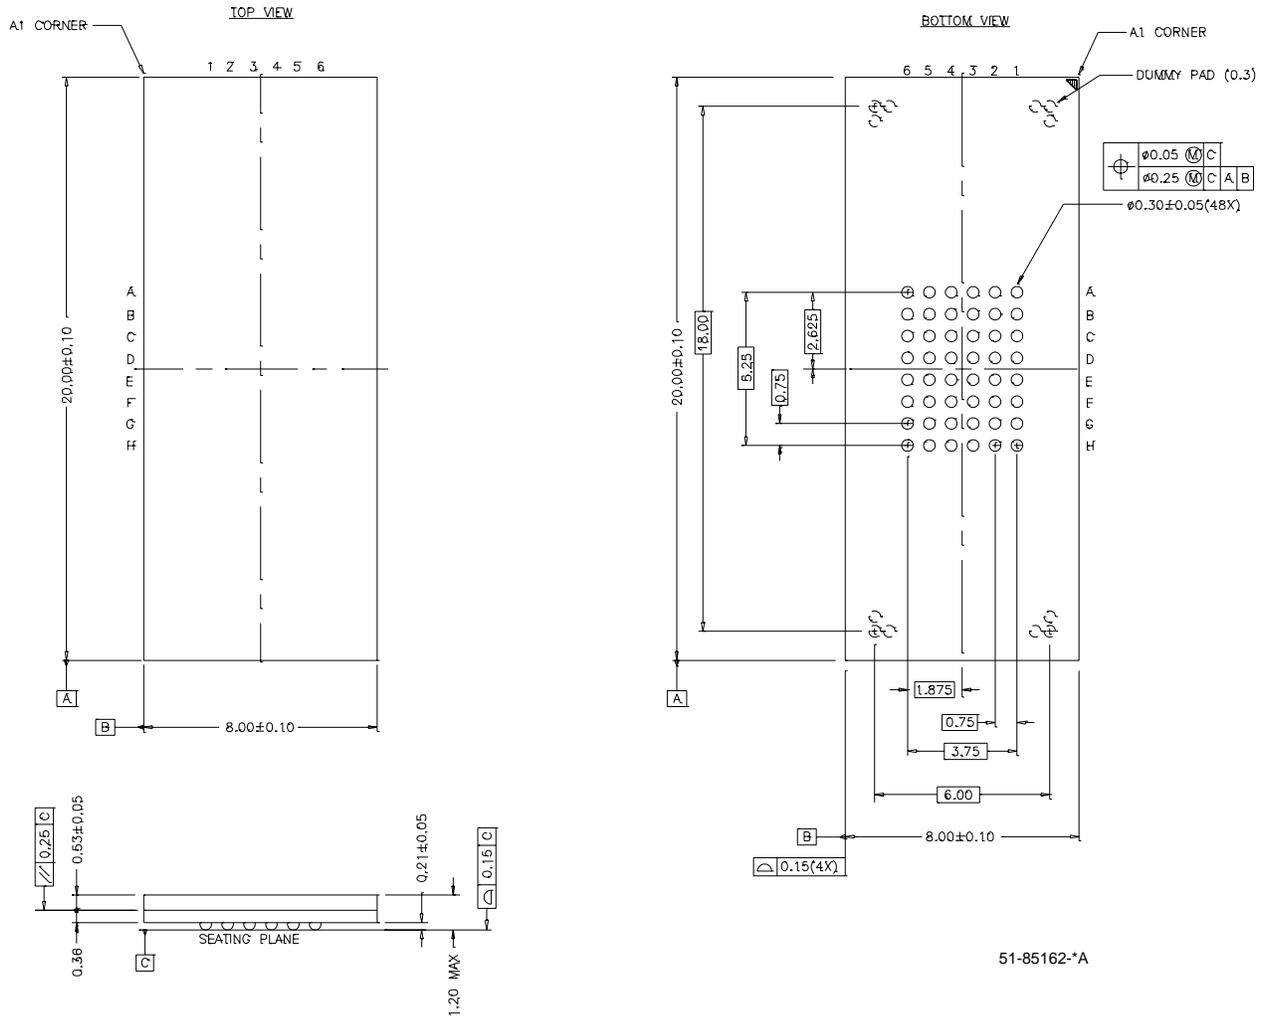
All product and company names mentioned in this document may be the trademarks of their respective holders.

Document History Page

Document Title: CY7C1069AV33 2M x 8 Static RAM
Document Number: 38-05255

REV.	ECN NO.	Issue Date	Orig. of Change	Description of Change
**	113724	03/27/02	NSL	New Data Sheet
*A	117060	07/31/02	DFP	Removed 15-ns bin
*B	117990	08/30/02	DFP	Added 8-ns bin Changing I_{CC} for 8, 10, 12 bins t_{power} changed from 1 μs to 1 ms Load Cap Comment changed (for Tx line load) t_{SD} changed to 5.5 ns for the 10-ns bin Changed some 8-ns bin #'s (t_{HZ}, t_{DOE}, t_{DBE}) Removed hz < lz comments
*C	120385	11/13/02	DFP	Final Data Sheet Added note 4 to "AC Test Loads and Waveforms" and note 7 to t_{pu} and t_{pd} Updated Input/Output Caps (for 48BGA only) to 8 pf/10 pf and for the 54-pin TSOP to 6/8 pf
*D	124441	2/25/03	MEG	Changed ISB1 from 100 mA to 70 mA Shaded the 48fBGA product offering information