D1RFRD006

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
2		图面更新	Hang	05/07/06"
3		修改总长	CSX	09/07/06"
4		图面更新	WF	01/31/07"
5		增加CQC刻字	WLM	01/09/09"
6	10-0359	增加VDE刻字及修改参数	ZXX	10/21/10"

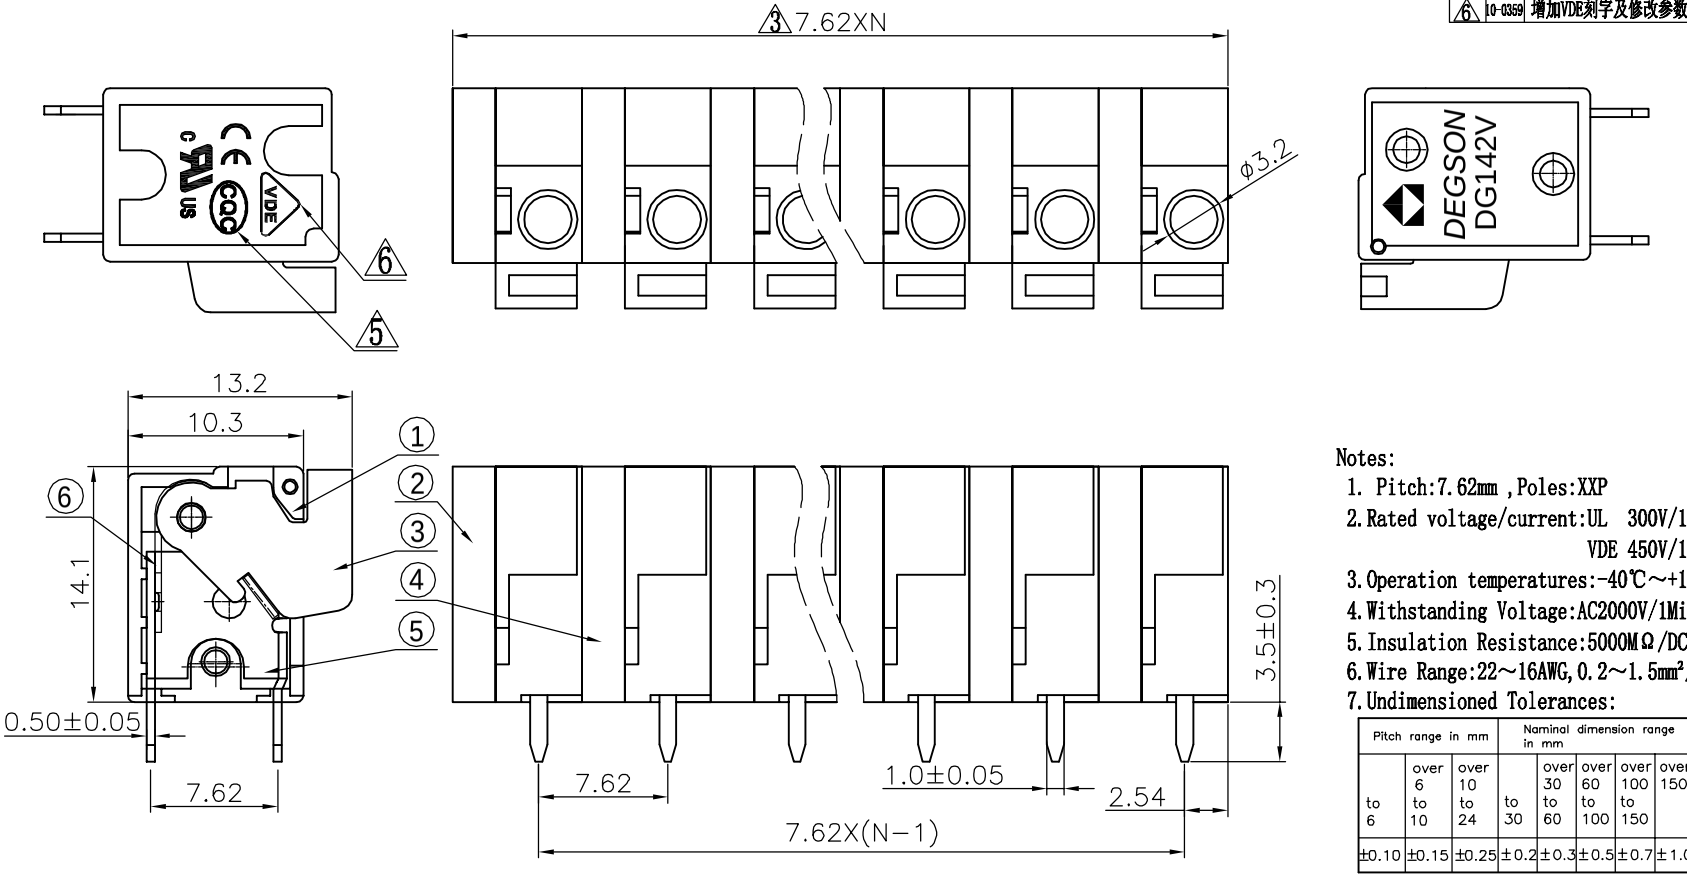

Notes:

1. Pitch:7.62mm ,Poles:XXP
2. Rated voltage/current:UL 300V/10A
   VDE 450V/15A 6
3. Operation temperatures:-40℃～+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000MΩ/DC1000V
6. Wire Range:22～16AWG,0.2～1.5mm² 6
7. Undimensioned Tolerances:

Pitch range in mm			Naminal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	∩ / ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
1	DG142V-5.08 Housing	3003A0Y01A(H)	XX	PA66	UL94V-0
6	DG142 Spring	X000000130(H)	XX	Stainless Steel	
5	DG142V Pin header	3003B00010(H)	XX	Brass	SnCe plated
4	DG142 Clapboard	3003H0Y01A(H)	XX-1	PA66	UL94V-0
3	DG142V-5.08 Button	3003D0501A(H)	XX	PA66	UL94V-0
2	DG142V-5.08 Cover	3003C0Y01A(H)	1	PA66	UL94V-0

DETACHED LISTS

MM (INCH)
TOLERANCES EXCEPT AS NOTED
MM
.0 ±
.00 ±
.000 ±
ANGLES ± 1°
THIRD ANGLE PROJECTION

DFTO Home DATE 02/15/06"
CHKD DATE
MFG DATE
APPVL DATE
MATERIAL :
G.E :
FINISH :
SCALE : 1:1

DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD

NAME
DG142V-7.62-XXP-1Y-00A(H)

DRAWING NO. DG142V-7.62-E03
/PART NO.
SIZE A3
REV T6 10/21/10"

DO NOT SCALE DRAWING
SHEET 1 OF 1

8 7 6 5 4 3 2 1
H G F E D C B A